

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P785261

Luminaire Tested: LER4DD50D010-EC4DR6040509024-4LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P785261
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4DD50D010-EC4DR6040509024-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4158.7 lumens
Efficiency: N/A
Efficacy: 88.5 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 47
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P785261

CATALOG NUMBER: LER4DD50D010-EC4DR6040509024-4LBDP1H

Luminous Intensity Polar Plot

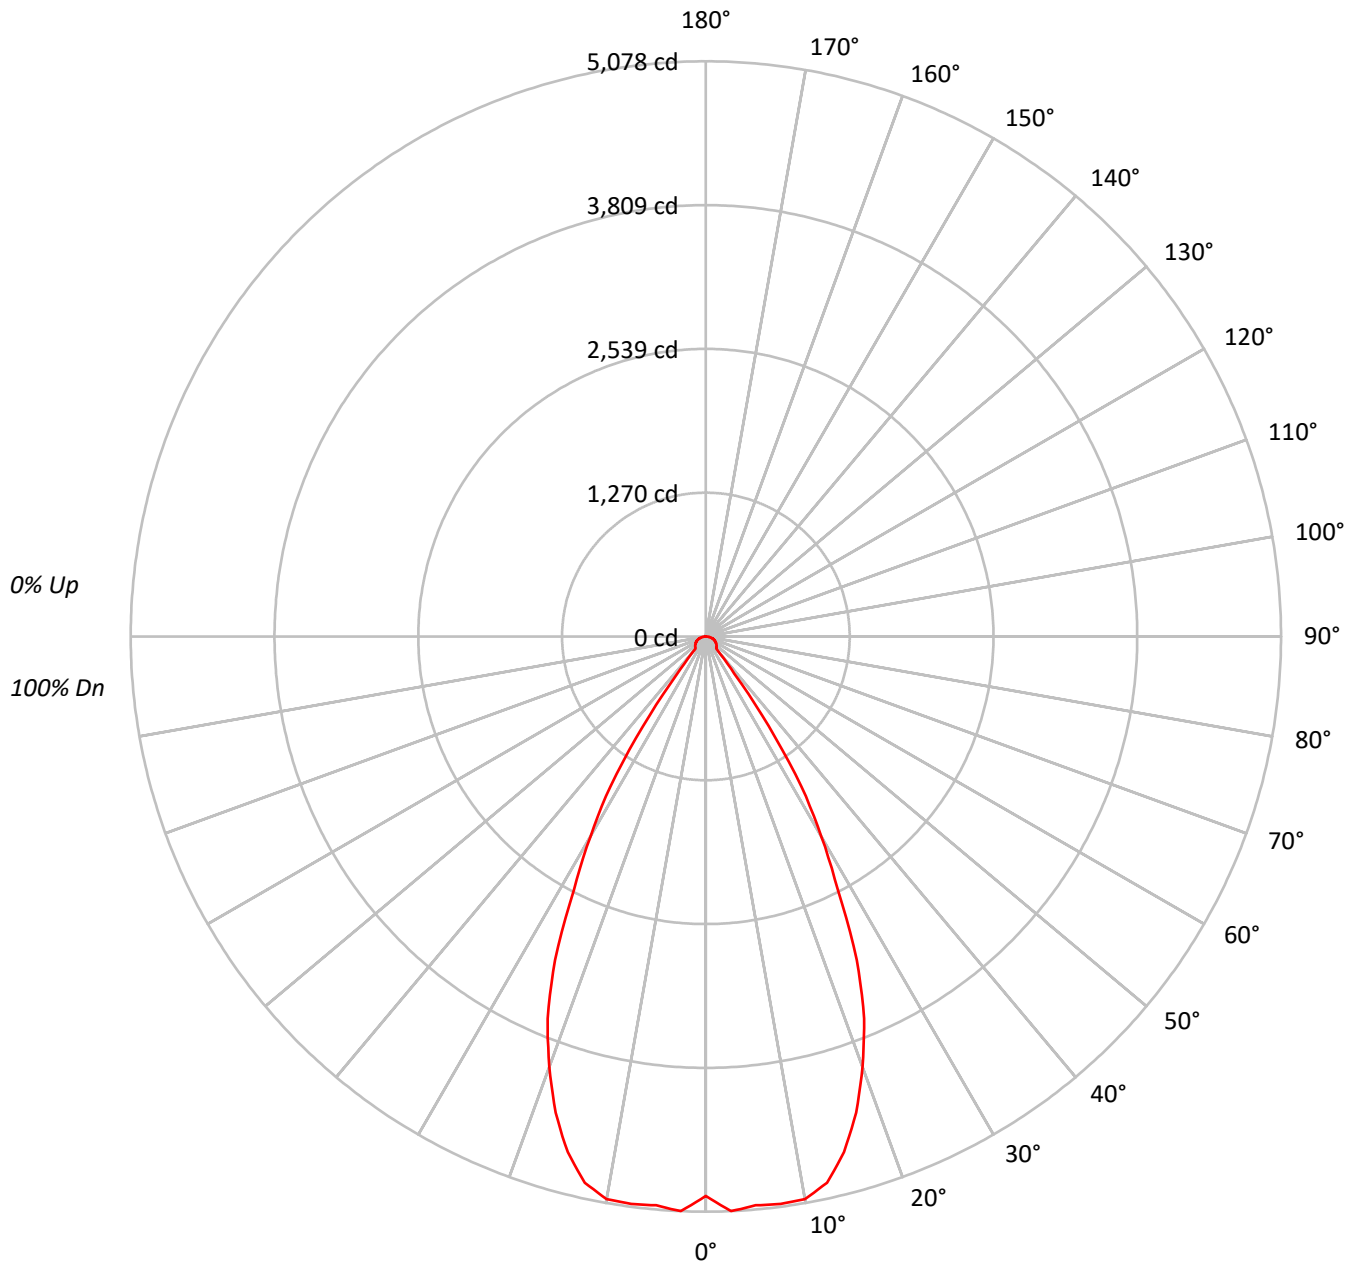



TEST NUMBER: P785261

CATALOG NUMBER: LER4DD50D010-EC4DR6040509024-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	95	105	101	97	94	97	94	92		94	92	90		92
3	102	96	90	86	100	94	89	86	91	88	84		89	86	83		87
4	97	89	84	80	95	88	83	79	86	82	78		84	80	77		82
5	92	84	78	74	91	83	78	74	81	77	73		80	76	72		78
6	88	79	73	69	87	78	73	69	77	72	68		75	71	68		74
7	84	75	69	65	83	74	68	64	73	68	64		72	67	64		71
8	80	71	65	61	79	70	65	61	69	64	60		68	64	60		67
9	77	67	61	57	75	67	61	57	66	61	57		65	60	57		64
10	73	64	58	54	72	63	58	54	62	58	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	539628
5°	552898
10°	559580
15°	533077
20°	470010
25°	380161
30°	257146
35°	128861
40°	20895
45°	20458
50°	20873
55°	21183
60°	21765
65°	22260
70°	22777
75°	23049
80°	22274
85°	18554

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 75°

Luminance: 23049 cd/sqm



TEST NUMBER: P785261

CATALOG NUMBER: LER4DD50D010-EC4DR6040509024-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	481.8	11.6
10°-20°	1303.6	31.3
20°-30°	1402.5	33.7
30°-40°	609.7	14.7
40°-50°	102.4	2.5
50°-60°	99.6	2.4
60°-70°	85.1	2.0
70°-80°	57.0	1.4
80°-90°	17.1	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3187.9	76.7
0°-40°	3797.5	91.3
0°-60°	3999.5	96.2
0°-90°	4158.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4158.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4939	
5°	5041	482
15°	4713	1304
25°	3153	1403
35°	966	610
45°	132	102
55°	111	100
65°	86	85
75°	55	57
85°	15	17
90°	0	



TEST NUMBER: P785261

CATALOG NUMBER: LER4DD50D010-EC4DR6040509024-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	4938.9
2.5°	5077.8
5°	5041.1
7.5°	5052.7
10°	5043.7
12.5°	4939.6
15°	4712.7
17.5°	4408.0
20°	4042.3
22.5°	3650.8
25°	3153.4
27.5°	2522.2
30°	2038.2
32.5°	1570.9
35°	966.1
37.5°	413.3
40°	146.5
42.5°	135.0
45°	132.4
47.5°	127.9
50°	122.8
52.5°	117.0
55°	111.2
57.5°	105.4
60°	99.6
62.5°	93.2
65°	86.1
67.5°	79.1
70°	71.3
72.5°	63.0
75°	54.6
77.5°	45.0
80°	35.4
82.5°	25.1
85°	14.8
87.5°	5.1
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)