

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P785268

Luminaire Tested: LER4DD50D010-EC4DR6040509030-4LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P785268
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4DD50D010-EC4DR6040509030-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3821.8 lumens
Efficiency: N/A
Efficacy: 81.3 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 47
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P785268

CATALOG NUMBER: LER4DD50D010-EC4DR6040509030-4LBDP1B

Luminous Intensity Polar Plot

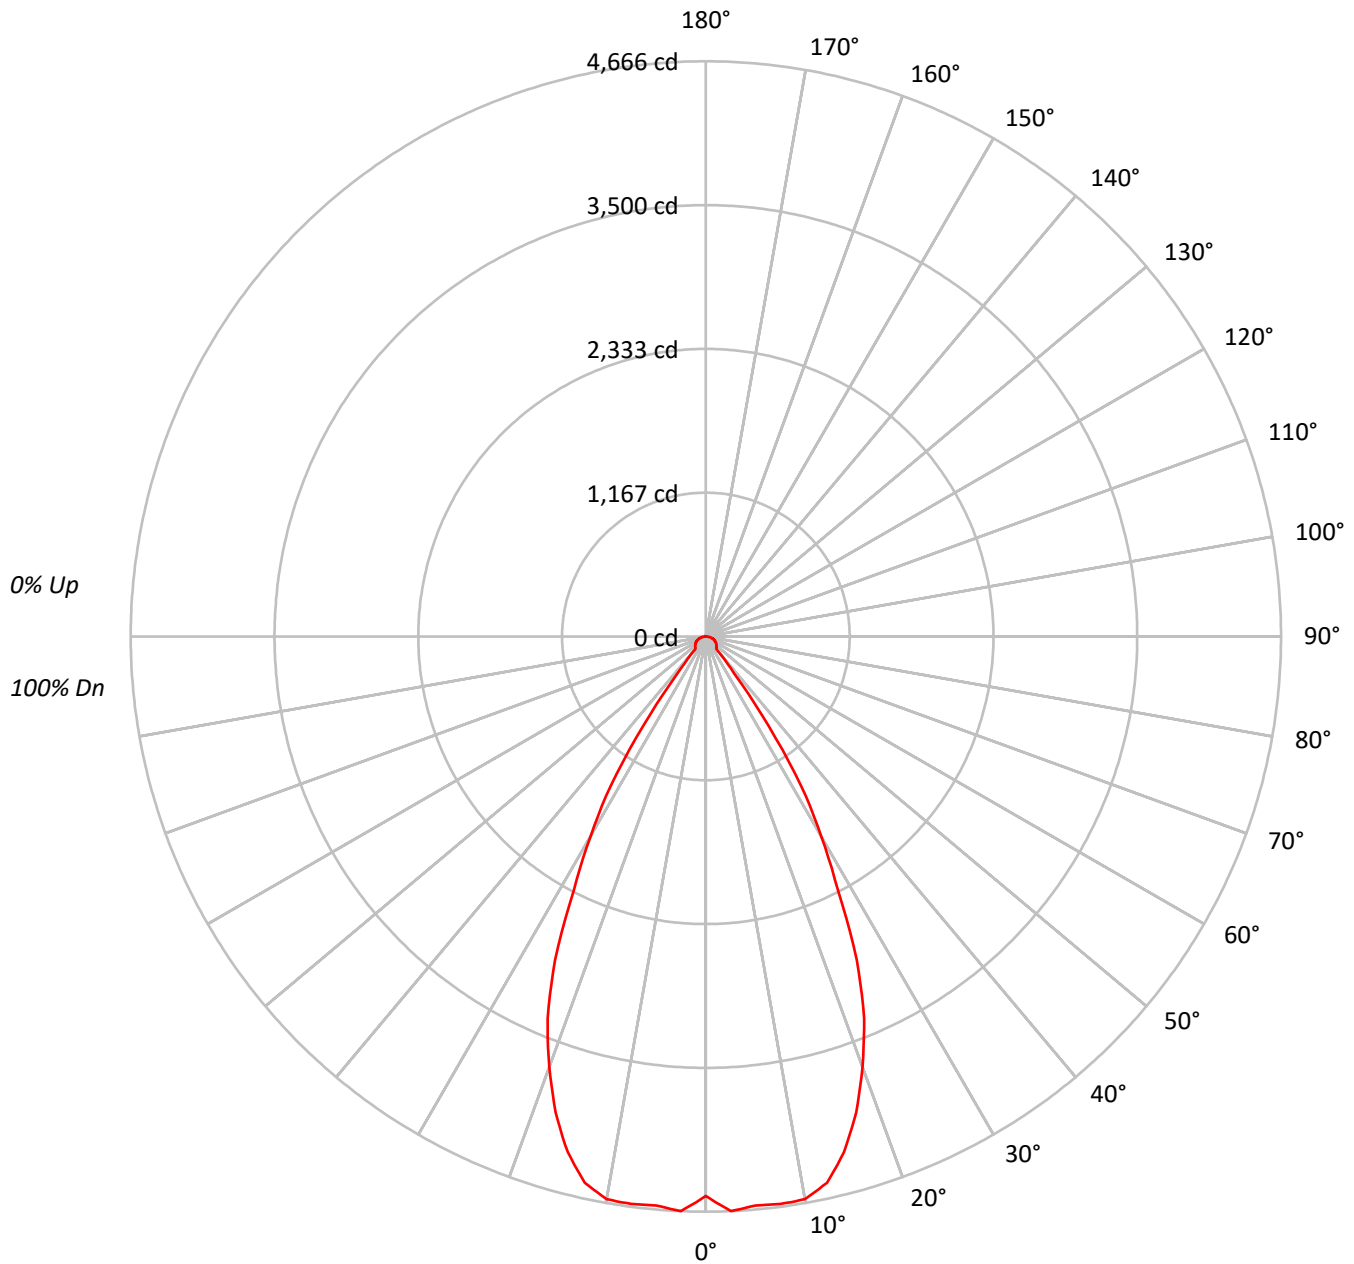



TEST NUMBER: P785268

CATALOG NUMBER: LER4DD50D010-EC4DR6040509030-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	95	105	101	97	94	97	94	92		94	92	90		92
3	102	96	90	86	100	94	89	86	91	88	84		89	86	83		87
4	97	89	84	80	95	88	83	79	86	82	78		84	80	77		82
5	92	84	78	74	91	83	78	74	81	77	73		80	76	72		78
6	88	79	73	69	87	78	73	69	77	72	68		75	71	68		74
7	84	75	69	65	83	74	68	64	73	68	64		72	67	64		71
8	80	71	65	61	79	70	65	61	69	64	60		68	64	60		67
9	77	67	61	57	75	67	61	57	66	61	57		65	60	57		64
10	73	64	58	54	72	63	58	54	62	58	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	495913
5°	508117
10°	514247
15°	489890
20°	431930
25°	349359
30°	236317
35°	118417
40°	19212
45°	18805
50°	19174
55°	19468
60°	20017
65°	20476
70°	20956
75°	21192
80°	20449
85°	17049

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 75°

Luminance: 21192 cd/sqm



TEST NUMBER: P785268

CATALOG NUMBER: LER4DD50D010-EC4DR6040509030-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	442.8	11.6
10°-20°	1197.9	31.3
20°-30°	1288.9	33.7
30°-40°	560.3	14.7
40°-50°	94.1	2.5
50°-60°	91.5	2.4
60°-70°	78.3	2.0
70°-80°	52.4	1.4
80°-90°	15.7	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2929.6	76.7
0°-40°	3489.9	91.3
0°-60°	3675.5	96.2
0°-90°	3821.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3821.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4539	
5°	4633	443
15°	4331	1198
25°	2898	1289
35°	888	560
45°	122	94
55°	102	92
65°	79	78
75°	50	52
85°	14	16
90°	0	



TEST NUMBER: P785268

CATALOG NUMBER: LER4DD50D010-EC4DR6040509030-4LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	4538.8
2.5°	4666.4
5°	4632.8
7.5°	4643.4
10°	4635.1
12.5°	4539.4
15°	4330.9
17.5°	4050.9
20°	3714.8
22.5°	3355.1
25°	2897.9
27.5°	2317.9
30°	1873.1
32.5°	1443.6
35°	887.8
37.5°	379.8
40°	134.7
42.5°	124.0
45°	121.7
47.5°	117.5
50°	112.8
52.5°	107.5
55°	102.2
57.5°	96.9
60°	91.6
62.5°	85.6
65°	79.2
67.5°	72.7
70°	65.6
72.5°	57.9
75°	50.2
77.5°	41.3
80°	32.5
82.5°	23.0
85°	13.6
87.5°	4.7
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)