

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P785317

Luminaire Tested: LER4DD50D010-EC4DR7040509030-4LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P785317
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4DD50D010-EC4DR7040509030-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4885.0 lumens
Efficiency: N/A
Efficacy: 103.9 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 47
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P785317

CATALOG NUMBER: LER4DD50D010-EC4DR7040509030-4LBDP1H

Luminous Intensity Polar Plot

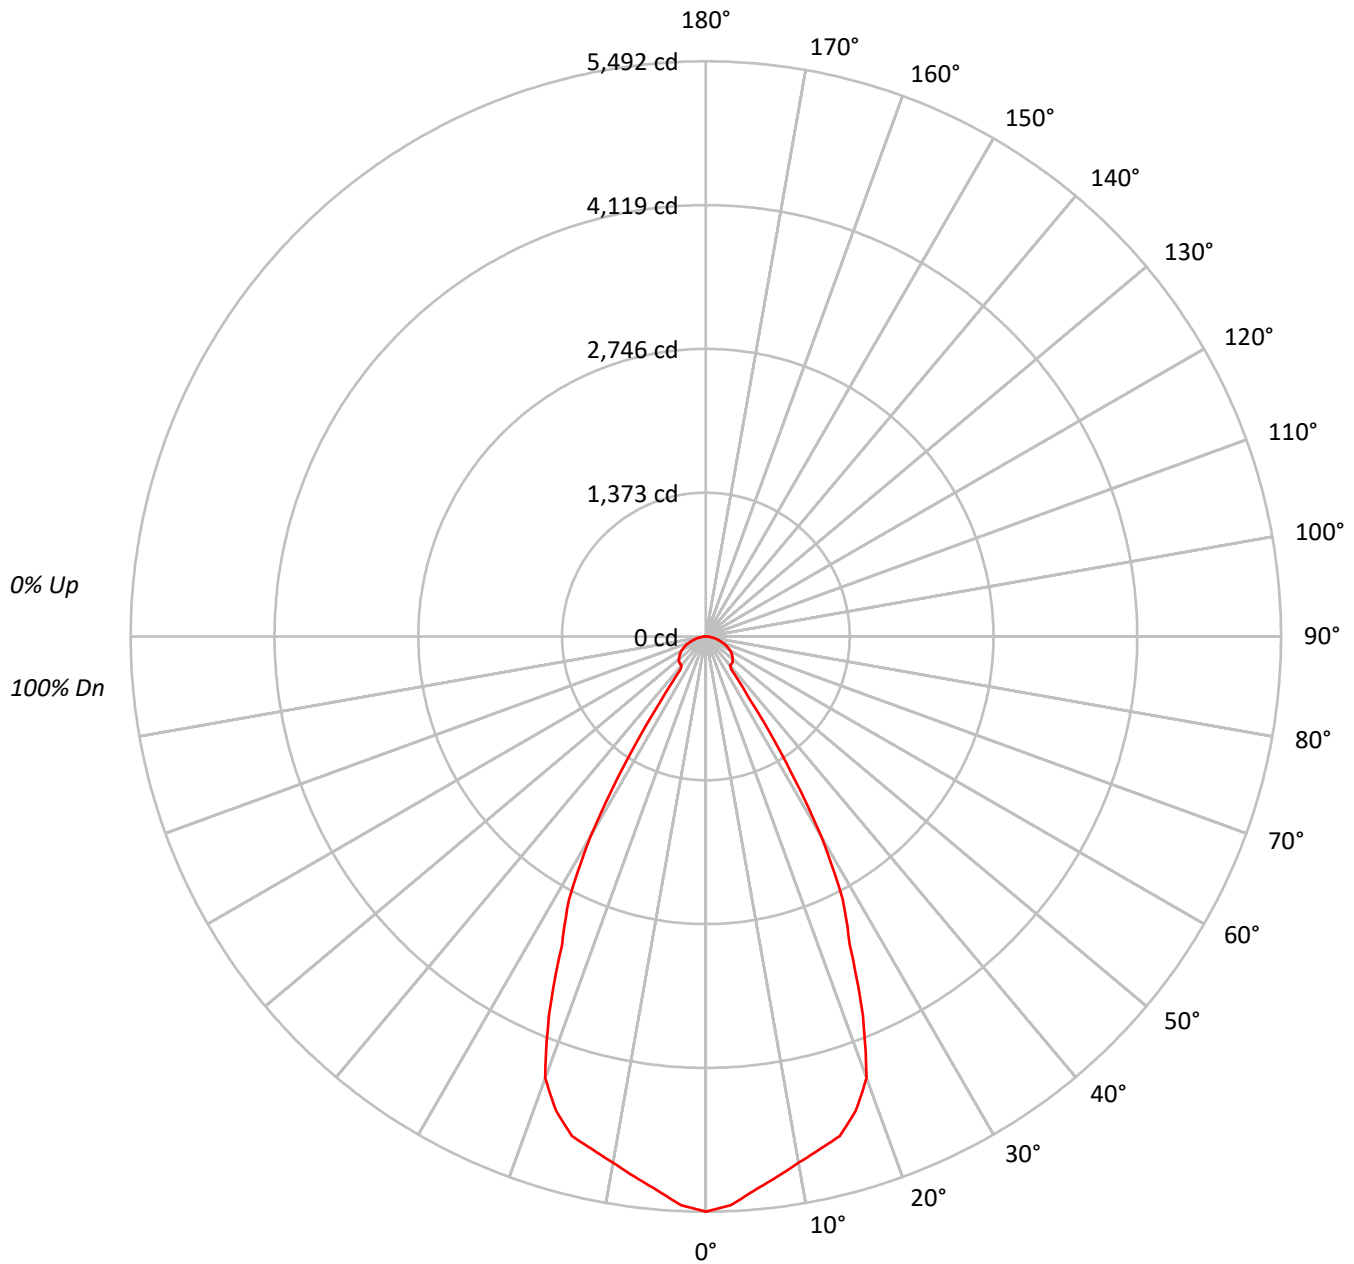



TEST NUMBER: P785317

CATALOG NUMBER: LER4DD50D010-EC4DR7040509030-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	600082
5°	582248
10°	566015
15°	558596
20°	521612
25°	391855
30°	277017
35°	98130
40°	51589
45°	54962
50°	56909
55°	57966
60°	58345
65°	57110
70°	53892
75°	49940
80°	44296
85°	35979

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 57.5°

Luminance: 58362 cd/sqm



TEST NUMBER: P785317

CATALOG NUMBER: LER4DD50D010-EC4DR7040509030-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	500.7	10.3
10°-20°	1373.5	28.1
20°-30°	1512.7	31.0
30°-40°	578.0	11.8
40°-50°	272.9	5.6
50°-60°	271.3	5.6
60°-70°	217.2	4.4
70°-80°	124.8	2.6
80°-90°	33.9	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3386.9	69.3
0°-40°	3964.8	81.2
0°-60°	4509.0	92.3
0°-90°	4885.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4885.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5492	
5°	5309	501
15°	4938	1373
25°	3250	1513
35°	736	578
45°	356	273
55°	304	271
65°	221	217
75°	118	125
85°	29	34
90°	0	



TEST NUMBER: P785317

CATALOG NUMBER: LER4DD50D010-EC4DR7040509030-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	5492.2
2.5°	5434.8
5°	5308.7
7.5°	5203.5
10°	5101.7
12.5°	5015.7
15°	4938.3
17.5°	4751.3
20°	4486.1
22.5°	3913.9
25°	3250.4
27.5°	2829.6
30°	2195.7
32.5°	1418.3
35°	735.7
37.5°	397.4
40°	361.7
42.5°	359.1
45°	355.7
47.5°	347.8
50°	334.8
52.5°	320.0
55°	304.3
57.5°	287.0
60°	267.0
62.5°	244.3
65°	220.9
67.5°	194.8
70°	168.7
72.5°	142.6
75°	118.3
77.5°	93.0
80°	70.4
82.5°	49.6
85°	28.7
87.5°	11.3
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)