

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P785329

Luminaire Tested: LER4DD50D010-EC4DR7040509050-4LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P785329
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4DD50D010-EC4DR7040509050-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5204.2 lumens
Efficiency: N/A
Efficacy: 110.7 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 47
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P785329

CATALOG NUMBER: LER4DD50D010-EC4DR7040509050-4LBDP1H

Luminous Intensity Polar Plot

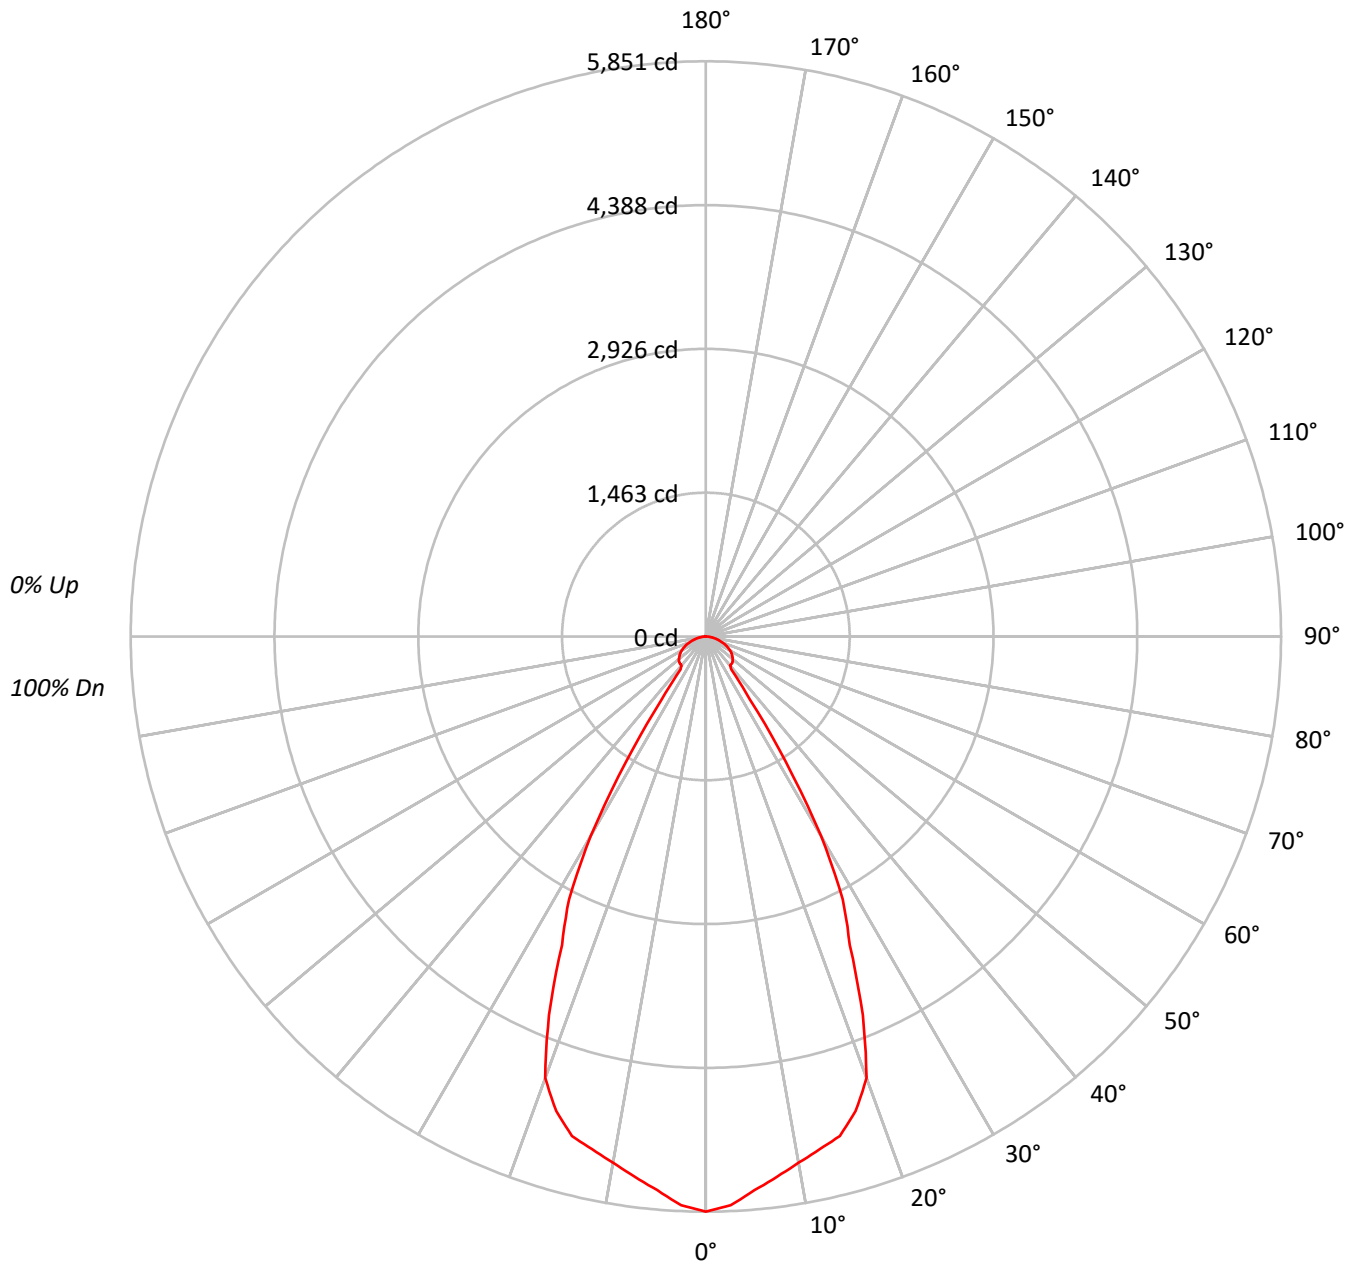



TEST NUMBER: P785329

CATALOG NUMBER: LER4DD50D010-EC4DR7040509050-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	102	103	101	99		99	97	96		95
2	106	100	95	91	103	98	94	90	95	91	88		92	89	86		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	86	80	75	92	85	79	74	82	77	73		80	76	73		78
5	89	80	74	69	87	79	73	69	77	72	68		75	71	67		74
6	85	75	68	64	83	74	68	64	73	67	63		71	66	63		70
7	80	70	64	59	79	70	64	59	68	63	59		67	62	59		66
8	77	66	60	56	75	66	60	56	65	59	55		64	59	55		63
9	73	63	57	52	72	62	56	52	61	56	52		60	55	52		60
10	70	59	53	49	69	59	53	49	58	53	49		57	52	49		57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	639285
5°	620285
10°	603004
15°	595087
20°	555691
25°	417461
30°	295109
35°	104532
40°	54970
45°	58547
50°	60632
55°	61757
60°	62148
65°	60833
70°	57406
75°	53191
80°	47191
85°	38361

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 57.5°

Luminance: 62165 cd/sqm



TEST NUMBER: P785329

CATALOG NUMBER: LER4DD50D010-EC4DR7040509050-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	533.4	10.3
10°-20°	1463.2	28.1
20°-30°	1611.5	31.0
30°-40°	615.7	11.8
40°-50°	290.7	5.6
50°-60°	289.0	5.6
60°-70°	231.4	4.4
70°-80°	133.0	2.6
80°-90°	36.1	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3608.1	69.3
0°-40°	4223.9	81.2
0°-60°	4803.6	92.3
0°-90°	5204.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5204.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5851	
5°	5656	533
15°	5261	1463
25°	3463	1612
35°	784	616
45°	379	291
55°	324	289
65°	235	231
75°	126	133
85°	31	36
90°	0	



TEST NUMBER: P785329

CATALOG NUMBER: LER4DD50D010-EC4DR7040509050-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	5851.0
2.5°	5789.9
5°	5655.5
7.5°	5543.4
10°	5435.1
12.5°	5343.3
15°	5260.9
17.5°	5061.7
20°	4779.2
22.5°	4169.6
25°	3462.8
27.5°	3014.4
30°	2339.1
32.5°	1510.9
35°	783.7
37.5°	423.4
40°	385.4
42.5°	382.6
45°	378.9
47.5°	370.6
50°	356.7
52.5°	340.9
55°	324.2
57.5°	305.7
60°	284.4
62.5°	260.3
65°	235.3
67.5°	207.5
70°	179.7
72.5°	151.9
75°	126.0
77.5°	99.1
80°	75.0
82.5°	52.8
85°	30.6
87.5°	12.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)