

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P1191470

Luminaire Tested: **LDA4A10935D010TE LAR35FL 4LAL1**

Issue Date: 3/3/2020

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

**Test Information**

Test Method: LM-41-14
Report Number: P1191470
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26146)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA4A10935D010TE LAR35FL 4LAL1
Description: PORTFOLIO 4" Lensed Adjustable, Self-flange Trim Ring, 35° Flood Optic, at 0° tilt
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1108.9 lumens
Efficiency: N/A
Efficacy: 89.4 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.55
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 12.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P1191470

CATALOG NUMBER: LDA4A10935D010TE LAR35FL 4LAL1

Luminous Intensity Polar Plot

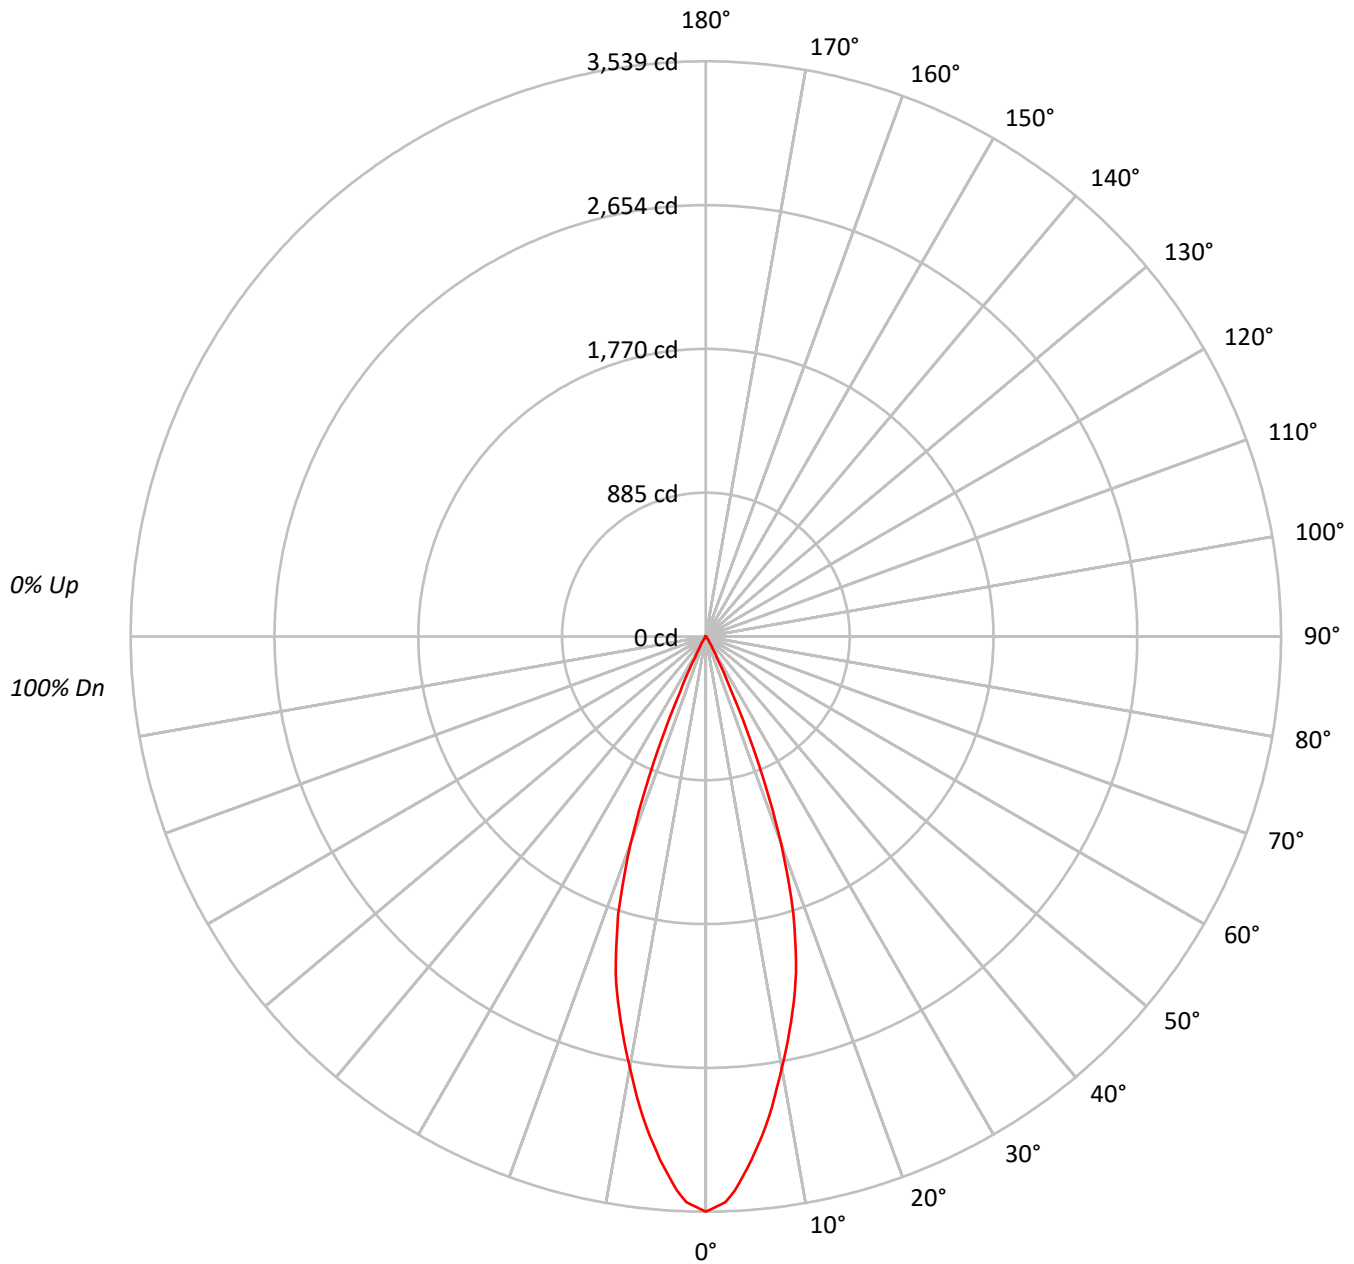

Cooper Lighting Solutions Photometric Lab

1121 Highway 74 South

Peachtree City, GA 30269



TEST NUMBER: P1191470

CATALOG NUMBER: LDA4A10935D010TE LAR35FL 4LAL1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	115	113	111	109	113	111	109	107	107	105	104	103	102	101	100	99	98	96		
2	111	107	104	102	109	106	103	100	103	100	98	100	98	96	97	96	94	93		
3	107	103	99	96	106	101	98	95	99	96	94	96	94	92	94	92	91	90		
4	104	98	94	91	102	97	93	91	95	92	90	93	91	89	92	89	88	86		
5	101	94	90	87	99	94	90	87	92	89	86	90	88	85	89	87	85	83		
6	97	91	87	84	96	90	86	83	89	85	83	88	85	82	86	84	82	81		
7	94	88	83	80	93	87	83	80	86	82	80	85	82	79	84	81	79	78		
8	92	85	80	77	91	84	80	77	83	80	77	82	79	77	82	79	76	75		
9	89	82	78	75	88	82	77	75	81	77	75	80	77	74	79	76	74	73		
10	86	79	75	72	86	79	75	72	78	75	72	78	74	72	77	74	72	71		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	436471
5°	400102
10°	337432
15°	273616
20°	177190
25°	51091
30°	11152
35°	3162
40°	1192
45°	488
50°	211
55°	108
60°	123
65°	146
70°	180
75°	0
80°	0
85°	0

Classified

Scaled Data Report

Cooper Lighting Solutions Photometric Lab

1121 Highway 74 South

Peachtree City, GA 30269



TEST NUMBER: P1191470

CATALOG NUMBER: LDA4A10935D010TE LAR35FL 4LAL1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	291.2	26.3
10°-20°	574.9	51.8
20°-30°	221.5	20.0
30°-40°	17.5	1.6
40°-50°	2.5	0.2
50°-60°	0.5	0.0
60°-70°	0.5	0.0
70°-80°	0.2	0.0
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1087.5	98.1
0°-40°	1105.0	99.7
0°-60°	1108.1	99.9
0°-90°	1109.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1108.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3539	
5°	3231	291
15°	2143	575
25°	375	221
35°	21	18
45°	3	3
55°	0	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1191470

CATALOG NUMBER: LDA4A10935D010TE LAR35FL 4LAL1

CANDELA DISTRIBUTION (FULL):

	0°
0°	3538.6
1°	3510.2
2°	3481.3
3°	3413.0
4°	3323.3
5°	3231.4
6°	3130.2
7°	3032.0
8°	2923.5
9°	2805.9
10°	2694.1
11°	2587.4
12°	2476.0
13°	2369.8
14°	2261.4
15°	2142.7
17.5°	1793.9
20°	1349.9
22.5°	834.3
25°	375.4
27.5°	144.2
30°	78.3
32.5°	40.4
35°	21.0
37.5°	12.5
40°	7.4
42.5°	4.6
45°	2.8
47.5°	1.7
50°	1.1
52.5°	0.5
55°	0.5
57.5°	0.5
60°	0.5
62.5°	0.5
65°	0.5
67.5°	0.5
70°	0.5
72.5°	0.0
75°	0.0
77.5°	0.5
80°	0.0
82.5°	0.0

Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



TEST NUMBER: P1191470
CATALOG NUMBER: LDA4A10935D010TE LAR35FL 4LAL1

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

Classified

Scaled Data Report

Cooper Lighting Solutions Photometric Lab

1121 Highway 74 South

Peachtree City, GA 30269



Report Generated By 670245859 / DESKTOP-T8S5UU9

Classified

Cooper Lighting Solutions Photometric Lab

1121 Highway 74 South

Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Classified

Cooper Lighting Solutions Photometric Lab

1121 Highway 74 South

Peachtree City, GA 30269

Scaled Data Report



Classified

Cooper Lighting Solutions Photometric Lab

1121 Highway 74 South

Peachtree City, GA 30269

Scaled Data Report



Classified
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



85°	0.0
87.5°	0.5

Classified

Cooper Lighting Solutions Photometric Lab

1121 Highway 74 South

Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)