

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211289

Luminaire Tested: **LE_4B15D010 EC4B10208035 4LBW1LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211289
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35232)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LE_4B15D010 EC4B10208035 4LBW1LI
Description: PORTFOLIO 4 INCH CYLINDER
WIDE DISTRIBUTION WITH SPECULAR CLEAR TRIM
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1760.9 lumens
Efficiency: N/A
Efficacy: 123.1 lumens/watt
Spacing Criteria (0/90/45): 1.3 / 1.3 / 1.19
Luminous Opening: Circular (Dia: 1.12' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211289

CATALOG NUMBER: LE_4B15D010 EC4B10208035 4LBW1LI

Luminous Intensity Polar Plot

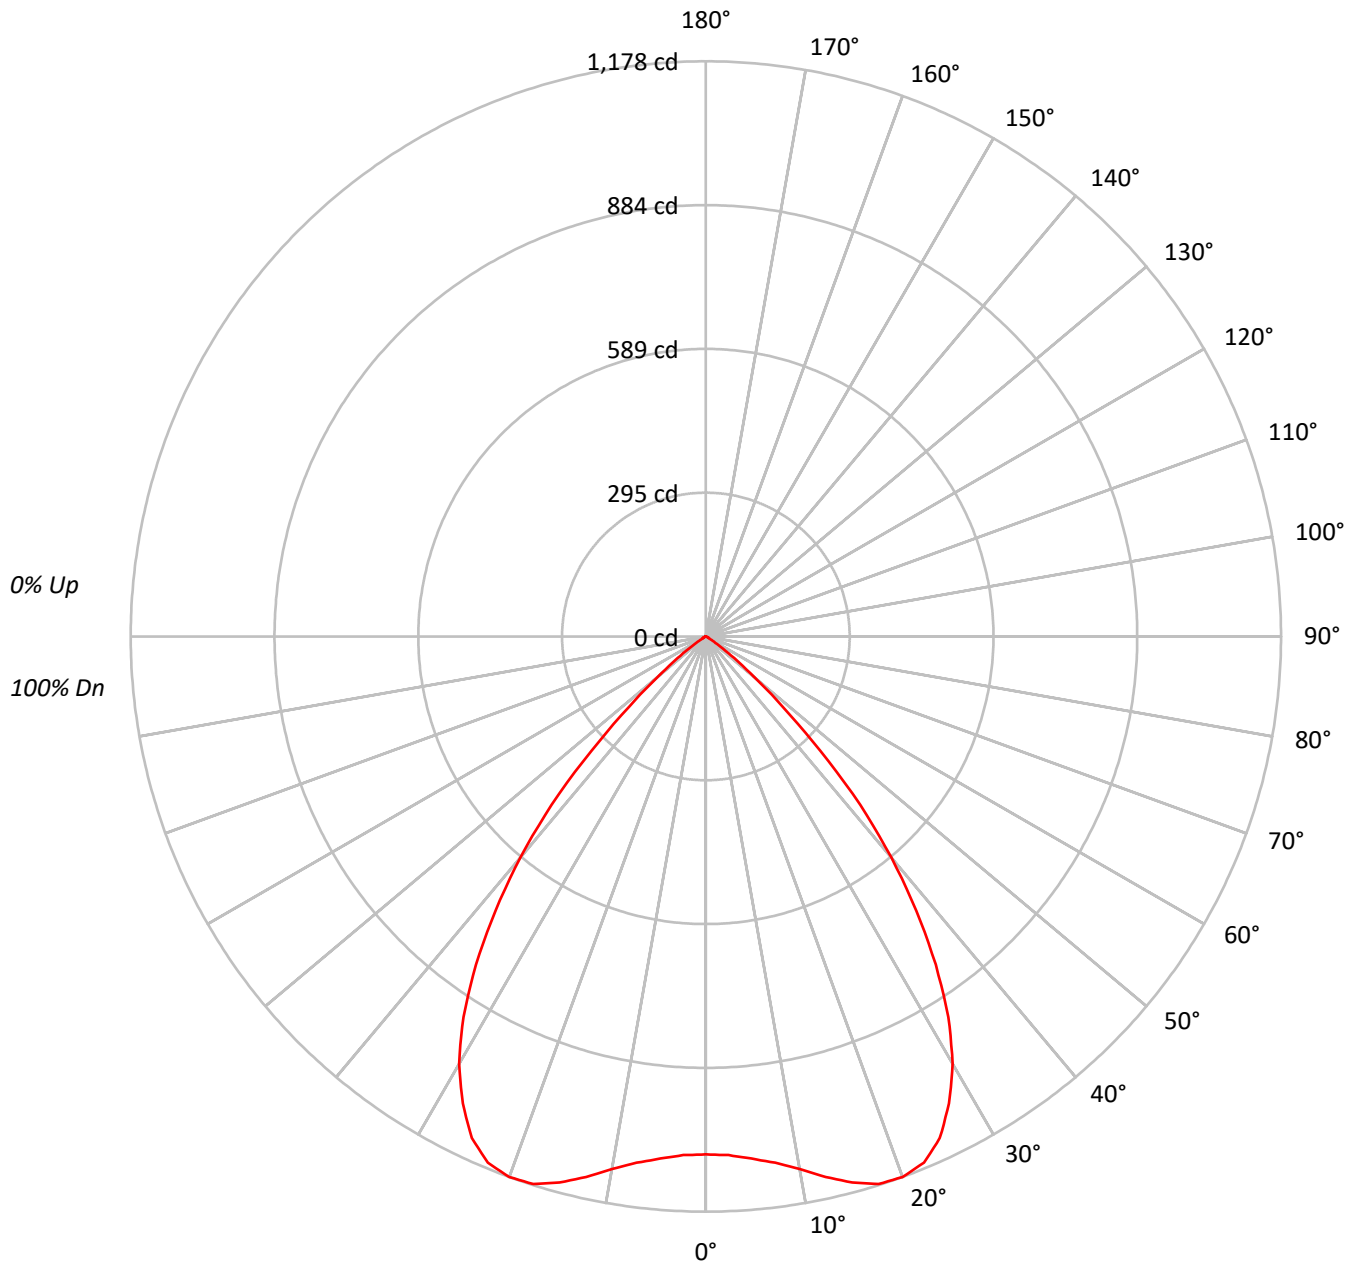



TEST NUMBER: P211289

CATALOG NUMBER: LE_4B15D010 EC4B10208035 4LBW1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	107	105		110	108	105	103		104	102	100		100	98	97		96	95	94
2	106	101	96	93		104	99	95	92		96	93	90		93	90	88		90	88	86
3	100	93	87	83		98	91	86	82		89	84	81		86	83	79		84	81	78
4	94	85	79	74		92	84	78	74		82	77	73		80	76	72		78	74	71
5	88	79	72	67		87	78	72	67		76	71	66		74	70	66		73	69	65
6	83	73	66	61		81	72	66	61		70	65	61		69	64	60		68	63	60
7	78	68	61	56		77	67	60	56		65	60	55		64	59	55		63	58	55
8	73	63	56	51		72	62	56	51		61	55	51		60	55	51		59	54	50
9	69	58	52	47		68	58	51	47		57	51	47		56	51	47		55	50	47
10	65	54	48	44		64	54	48	44		53	47	43		52	47	43		52	47	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	11487
5°	11667
10°	12178
15°	12977
20°	13575
25°	13546
30°	12638
35°	10848
40°	8350
45°	5072
50°	2187
55°	666
60°	173
65°	115
70°	73
75°	50
80°	0
85°	0



TEST NUMBER: P211289

CATALOG NUMBER: LE_4B15D010 EC4B10208035 4LBW1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	103.5	5.9
10°-20°	327.8	18.6
20°-30°	515.2	29.3
30°-40°	505.7	28.7
40°-50°	260.6	14.8
50°-60°	42.2	2.4
60°-70°	4.6	0.3
70°-80°	1.3	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	946.5	53.7
0°-40°	1452.3	82.5
0°-60°	1755.1	99.7
0°-90°	1760.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1760.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1061	
5°	1073	103
15°	1158	328
25°	1134	515
35°	821	506
45°	331	261
55°	35	42
65°	4	5
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P211289

CATALOG NUMBER: LE_4B15D010 EC4B10208035 4LBW1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1060.8
2.5°	1063.0
5°	1073.3
7.5°	1086.9
10°	1107.5
12.5°	1133.7
15°	1157.6
17.5°	1175.8
20°	1178.0
22.5°	1166.6
25°	1133.7
27.5°	1077.9
30°	1010.7
32.5°	924.2
35°	820.6
37.5°	707.9
40°	590.7
42.5°	467.8
45°	331.2
47.5°	212.9
50°	129.8
52.5°	72.8
55°	35.3
57.5°	15.9
60°	8.0
62.5°	5.7
65°	4.5
67.5°	3.4
70°	2.3
72.5°	1.2
75°	1.2
77.5°	1.2
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)