

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211690

Luminaire Tested: **LE\_4B20D010 EC4B10209035 4LBS1H**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P211690  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LE\_4B20D010 EC4B10209035 4LBS1H  
Description: PORTFOLIO 4 INCH CYLINDER  
SHALLOW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM  
WATTAGE D010TR-21.86W DE010-20.46W D5LT-21.24W DMX-20.89W DL2-22.5W  
DL3-21.8 6W DLE-22.46W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1998.8 lumens  
Efficiency: N/A  
Efficacy: 96.1 lumens/watt  
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 20.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P211690

CATALOG NUMBER: LE\_4B20D010 EC4B10209035 4LBS1H

### Luminous Intensity Polar Plot

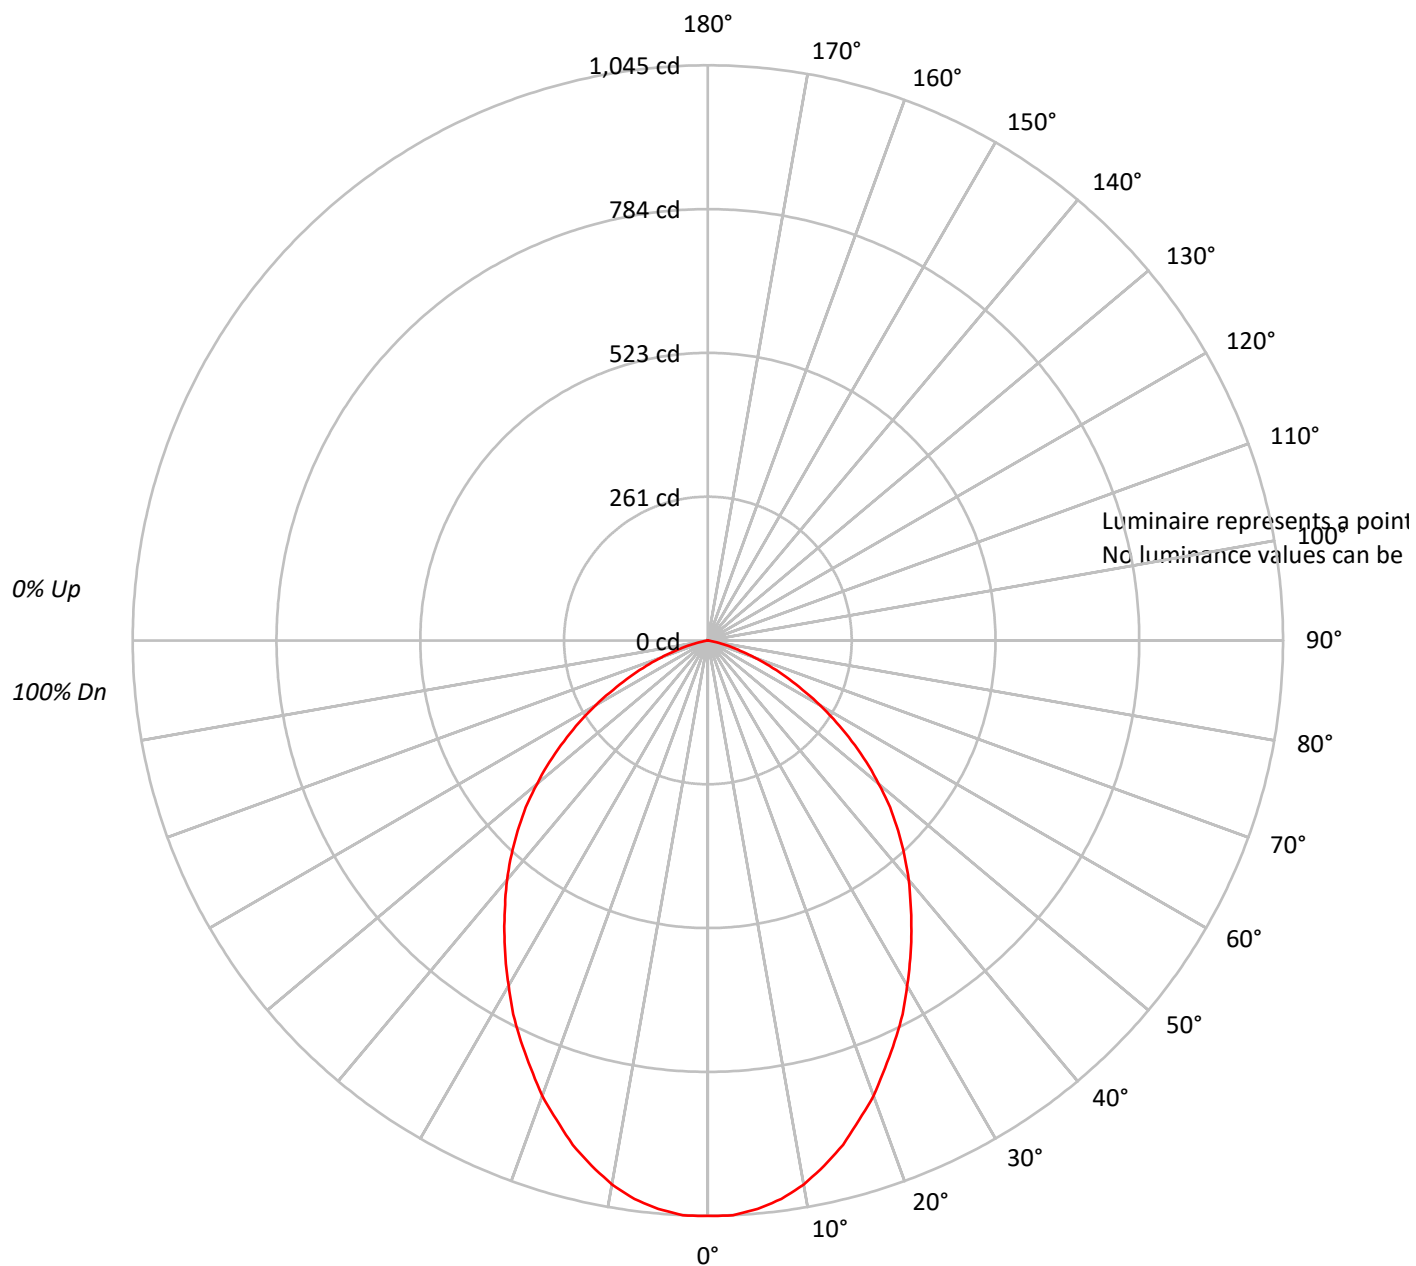



TEST NUMBER: P211690

CATALOG NUMBER: LE\_4B20D010 EC4B10209035 4LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|
| RF  | 20  |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |     | 20 |
| RC  | 80  |     |     |     | 70  |     |     |     |     | 50  |     |     |     |     | 30  |     |     |     | 10 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |
| 1   | 111 | 107 | 104 | 101 | 108 | 105 | 102 | 99  | 101 | 98  | 96  | 97  | 95  | 93  | 93  | 92  | 90  | 88  |    |
| 2   | 102 | 96  | 90  | 85  | 100 | 94  | 88  | 84  | 90  | 86  | 82  | 87  | 83  | 80  | 84  | 81  | 79  | 77  |    |
| 3   | 95  | 85  | 78  | 73  | 92  | 84  | 77  | 72  | 81  | 75  | 71  | 78  | 74  | 70  | 76  | 72  | 69  | 67  |    |
| 4   | 87  | 77  | 69  | 63  | 85  | 75  | 68  | 63  | 73  | 67  | 62  | 71  | 65  | 61  | 69  | 64  | 60  | 58  |    |
| 5   | 81  | 69  | 61  | 55  | 79  | 68  | 61  | 55  | 66  | 60  | 55  | 64  | 59  | 54  | 63  | 58  | 53  | 51  |    |
| 6   | 75  | 63  | 55  | 49  | 73  | 62  | 54  | 49  | 60  | 54  | 49  | 59  | 53  | 48  | 57  | 52  | 48  | 46  |    |
| 7   | 70  | 58  | 50  | 44  | 68  | 57  | 49  | 44  | 55  | 49  | 44  | 54  | 48  | 43  | 53  | 47  | 43  | 41  |    |
| 8   | 65  | 53  | 45  | 40  | 64  | 52  | 45  | 40  | 51  | 44  | 39  | 50  | 44  | 39  | 49  | 43  | 39  | 37  |    |
| 9   | 61  | 49  | 41  | 36  | 60  | 48  | 41  | 36  | 47  | 40  | 36  | 46  | 40  | 36  | 45  | 40  | 35  | 34  |    |
| 10  | 58  | 45  | 38  | 33  | 56  | 45  | 38  | 33  | 44  | 37  | 33  | 43  | 37  | 33  | 42  | 37  | 33  | 31  |    |

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P211690

CATALOG NUMBER: LE\_4B20D010 EC4B10209035 4LBS1H

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 97.9   | 4.9       |
| 10°-20°   | 266.1  | 13.3      |
| 20°-30°   | 369.6  | 18.5      |
| 30°-40°   | 403.3  | 20.2      |
| 40°-50°   | 376.2  | 18.8      |
| 50°-60°   | 285.6  | 14.3      |
| 60°-70°   | 156.4  | 7.8       |
| 70°-80°   | 43.0   | 2.2       |
| 80°-90°   | 0.6    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 733.7  | 36.7      |
| 0°-40°    | 1137.0 | 56.9      |
| 0°-60°    | 1798.8 | 90.0      |
| 0°-90°    | 1998.8 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1998.8 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1045 |      |
| 5°  | 1037 | 98   |
| 15° | 948  | 266  |
| 25° | 803  | 370  |
| 35° | 645  | 403  |
| 45° | 489  | 376  |
| 55° | 319  | 286  |
| 65° | 156  | 156  |
| 75° | 38   | 43   |
| 85° | 0    | 1    |
| 90° | 0    |      |



TEST NUMBER: P211690

CATALOG NUMBER: LE\_4B20D010 EC4B10209035 4LBS1H

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 1045.4 |
| 2.5°  | 1045.4 |
| 5°    | 1036.6 |
| 7.5°  | 1023.4 |
| 10°   | 1003.5 |
| 12.5° | 977.2  |
| 15°   | 948.5  |
| 17.5° | 913.3  |
| 20°   | 880.3  |
| 22.5° | 840.7  |
| 25°   | 803.3  |
| 27.5° | 765.8  |
| 30°   | 724.1  |
| 32.5° | 684.4  |
| 35°   | 644.8  |
| 37.5° | 605.2  |
| 40°   | 567.8  |
| 42.5° | 528.1  |
| 45°   | 488.6  |
| 47.5° | 448.9  |
| 50°   | 405.0  |
| 52.5° | 363.1  |
| 55°   | 319.1  |
| 57.5° | 277.2  |
| 60°   | 235.5  |
| 62.5° | 193.7  |
| 65°   | 156.3  |
| 67.5° | 121.0  |
| 70°   | 90.2   |
| 72.5° | 61.6   |
| 75°   | 37.5   |
| 77.5° | 17.6   |
| 80°   | 4.4    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)