

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211944

Luminaire Tested: **LE_4B30D010 EC4B30508030 4LBN1H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211944
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LE_4B30D010 EC4B30508030 4LBN1H
Description: PORTFOLIO 4 INCH CYLINDER
NARROW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W
DL3-29.67W DLE-29.73W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2115.5 lumens
Efficiency: N/A
Efficacy: 75.6 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.85
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211944

CATALOG NUMBER: LE_4B30D010 EC4B30508030 4LBN1H

Luminous Intensity Polar Plot

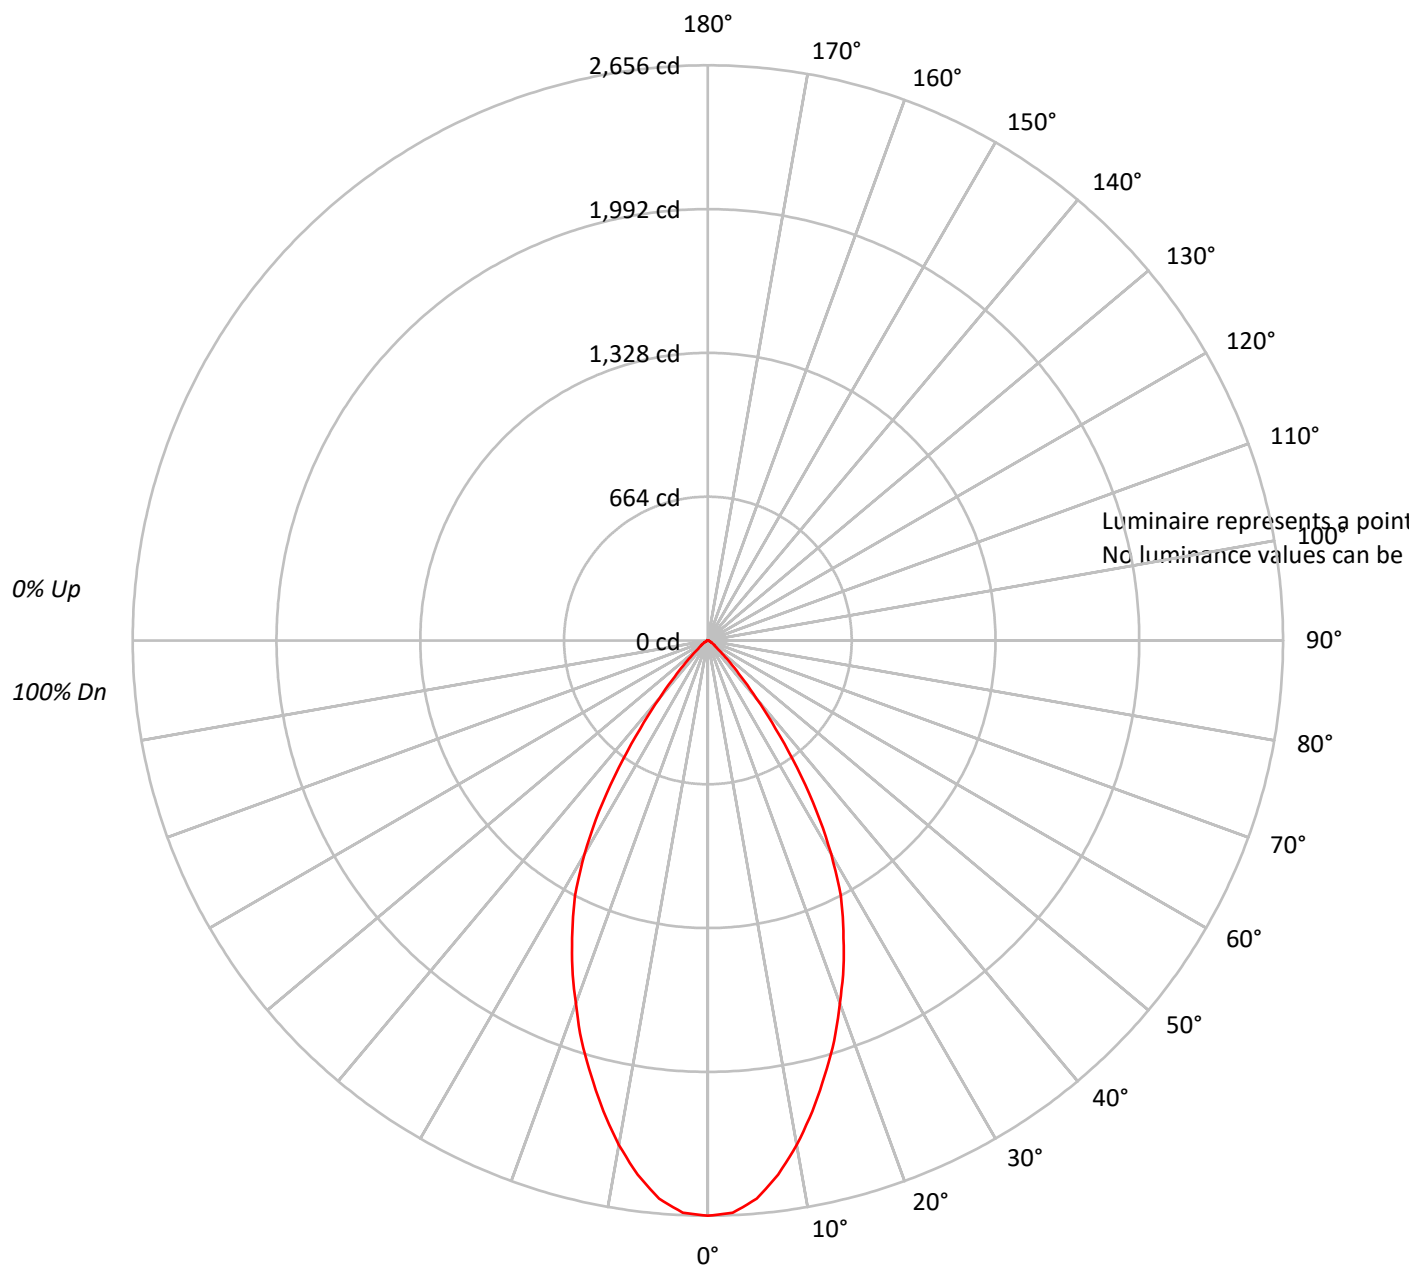



TEST NUMBER: P211944

CATALOG NUMBER: LE_4B30D010 EC4B30508030 4LBN1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	111	108	106	111	109	106	104	105	103	101		101	99	98		97
2	108	103	99	96	106	101	98	94	98	95	92		95	93	90		92
3	102	96	91	87	100	95	90	86	92	88	85		90	86	84		87
4	97	90	84	80	95	89	83	79	86	82	78		84	81	78		83
5	92	84	78	74	91	83	78	73	81	76	73		80	75	72		78
6	88	79	73	69	86	78	72	68	77	72	68		75	71	67		74
7	83	74	68	64	82	73	68	64	72	67	63		71	66	63		70
8	79	70	64	60	78	69	64	60	68	63	59		67	63	59		66
9	76	66	60	56	74	65	60	56	65	59	56		64	59	56		63
10	72	62	57	53	71	62	56	53	61	56	53		60	56	52		60

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211944

CATALOG NUMBER: LE_4B30D010 EC4B30508030 4LBN1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	239.7	11.3
10°-20°	581.3	27.5
20°-30°	674.9	31.9
30°-40°	447.0	21.1
40°-50°	125.4	5.9
50°-60°	31.5	1.5
60°-70°	11.8	0.6
70°-80°	4.0	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1495.9	70.7
0°-40°	1942.9	91.8
0°-60°	2099.7	99.3
0°-90°	2115.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2115.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2656	
5°	2587	240
15°	2081	581
25°	1480	675
35°	717	447
45°	146	125
55°	34	31
65°	12	12
75°	4	4
85°	0	0
90°	0	



TEST NUMBER: P211944

CATALOG NUMBER: LE_4B30D010 EC4B30508030 4LBN1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	2656.2
2.5°	2644.7
5°	2587.1
7.5°	2487.5
10°	2364.9
12.5°	2226.9
15°	2081.3
17.5°	1939.4
20°	1782.3
22.5°	1636.6
25°	1479.5
27.5°	1330.1
30°	1138.3
32.5°	935.2
35°	716.8
37.5°	513.6
40°	348.8
42.5°	226.1
45°	145.7
47.5°	88.2
50°	57.5
52.5°	42.1
55°	34.5
57.5°	26.8
60°	19.1
62.5°	15.3
65°	11.5
67.5°	7.7
70°	7.7
72.5°	3.8
75°	3.8
77.5°	3.8
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)