

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P210767

Luminaire Tested: **LSR4B10D010BZ EC4B10209027 4LBWB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P210767
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35170)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B10D010BZ EC4B10209027 4LBWB1
Description: PORTFOLIO 4 INCH CYLINDER
WIDE DISTRIBUTION WITH SPECULAR BLACK TRIM
WATTAGE D010TR-10.05W DE010-10.58W D5LT-10.2W DMX-10.6W DL2-11.8W
DL3-11.1W DLE-11.39W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 431.3 lumens
Efficiency: N/A
Efficacy: 44.3 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.08 / 1.03
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 9.73
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P210767

CATALOG NUMBER: LSR4B10D010BZ EC4B10209027 4LBWB1

Luminous Intensity Polar Plot

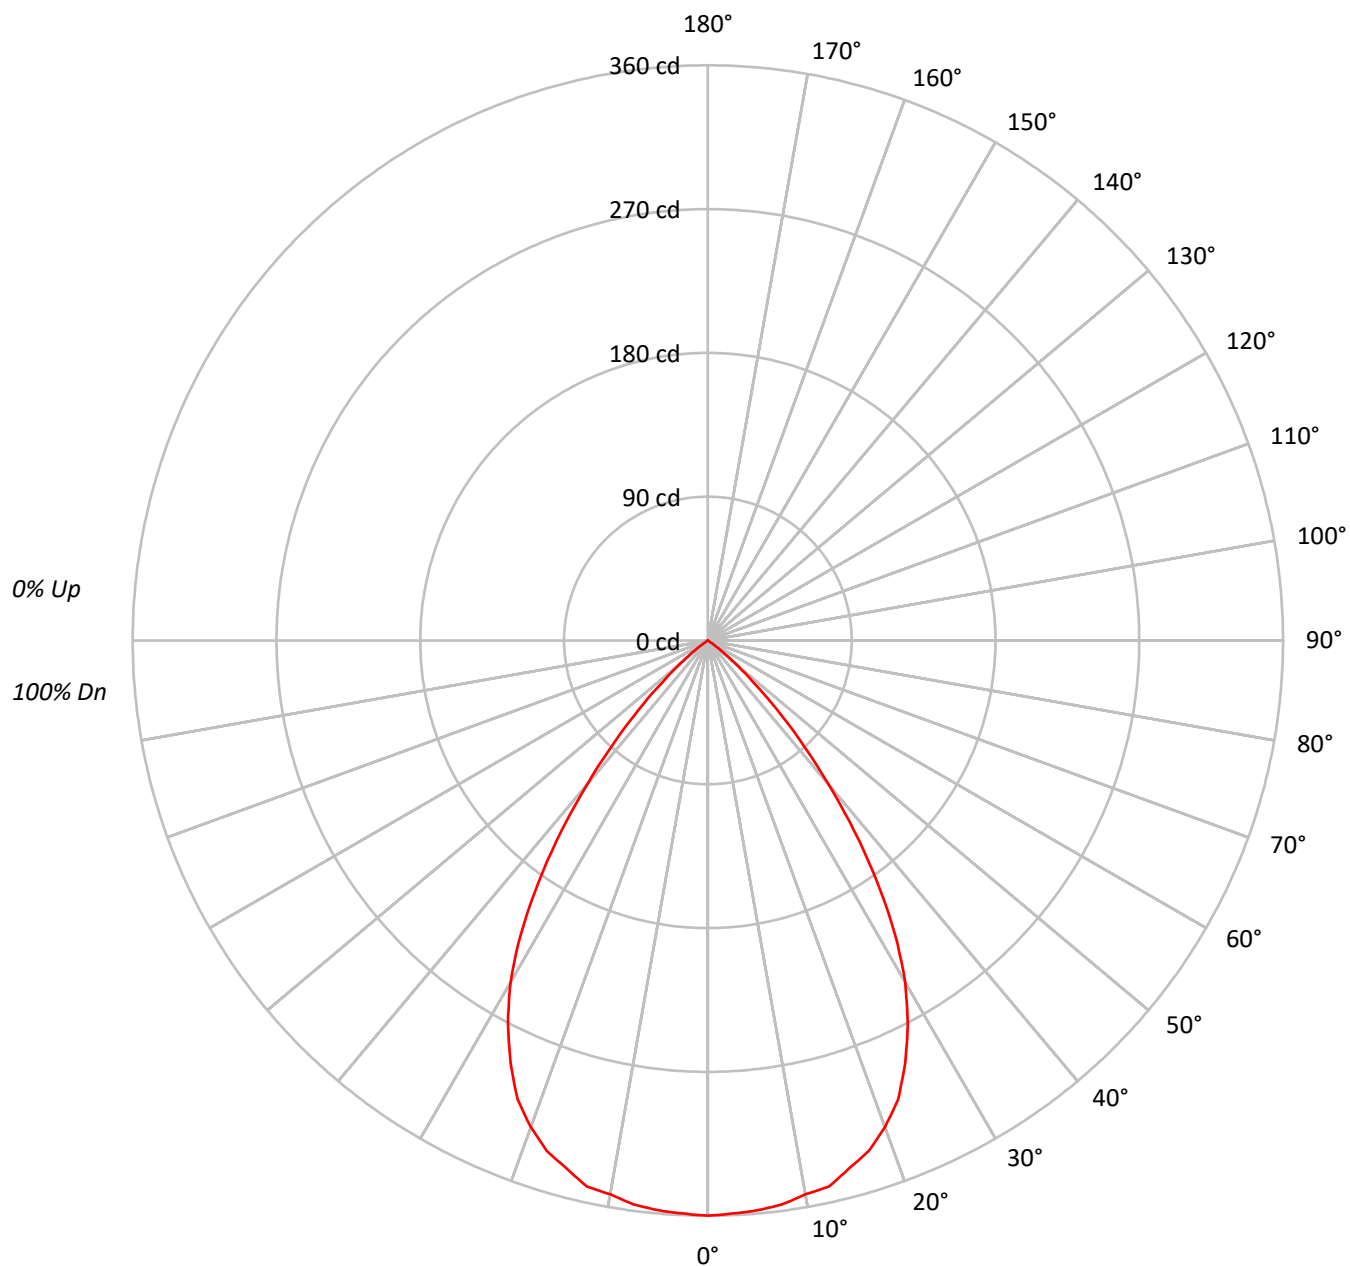



TEST NUMBER: P210767

CATALOG NUMBER: LSR4B10D010BZ EC4B10209027 4LBWB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	108	105		111	108	106	104		104	102	100		100	99	97		97	96	95
2	107	102	98	94		105	100	96	93		97	94	91		94	91	89		91	89	87
3	101	94	89	85		99	93	88	84		90	86	83		88	84	82		86	83	80
4	96	88	82	77		94	86	81	77		84	79	76		82	78	75		80	77	74
5	90	81	75	70		89	80	74	70		79	73	69		77	72	69		75	71	68
6	85	76	69	65		84	75	69	64		73	68	64		72	67	64		70	66	63
7	80	71	64	60		79	70	64	59		69	63	59		67	62	59		66	62	58
8	76	66	60	55		75	65	59	55		64	59	55		63	58	54		62	58	54
9	72	62	55	51		71	61	55	51		60	55	51		59	54	51		58	54	50
10	68	58	52	48		67	58	52	48		57	51	47		56	51	47		55	50	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	39334
5°	39265
10°	39053
15°	38685
20°	37672
25°	35202
30°	31162
35°	24676
40°	16688
45°	9426
50°	3740
55°	571
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P210767

CATALOG NUMBER: LSR4B10D010BZ EC4B10209027 4LBWB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	34.0	7.9
10°-20°	96.3	22.3
20°-30°	133.1	30.9
30°-40°	114.0	26.4
40°-50°	48.4	11.2
50°-60°	5.4	1.3
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	263.4	61.1
0°-40°	377.4	87.5
0°-60°	431.3	100.0
0°-90°	431.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	431.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	360	
5°	358	34
15°	342	96
25°	292	133
35°	185	114
45°	61	48
55°	3	5
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P210767

CATALOG NUMBER: LSR4B10D010BZ EC4B10209027 4LBWB1

CANDELA DISTRIBUTION (FULL):

	0°
0°	360
2.5°	359
5°	358
7.5°	356
10°	352
12.5°	350
15°	342
17.5°	335
20°	324
22.5°	311
25°	292
27.5°	271
30°	247
32.5°	218
35°	185
37.5°	151
40°	117
42.5°	87
45°	61
47.5°	38
50°	22
52.5°	11
55°	3
57.5°	0
60°	0
62.5°	0
65°	0
67.5°	0
70°	0
72.5°	0
75°	0
77.5°	0
80°	0
82.5°	0
85°	0
87.5°	0
90°	0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)