

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P210768

Luminaire Tested: **LSR4B10D010BZ EC4B10209027 4LBWGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P210768
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35169)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B10D010BZ EC4B10209027 4LBWGPH1
Description: PORTFOLIO 4 INCH CYLINDER
WIDE DISTRIBUTIONWITH GRAPHITE HAZE TRIM
WATTAGE D010TR-10.05W DE010-10.58W D5LT-10.2W DMX-10.6W DL2-11.8W
DL3-11.1W DLE-11.39W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 576.6 lumens
Efficiency: N/A
Efficacy: 59.3 lumens/watt
Spacing Criteria (0/90/45): 1.12 / 1.12 / 1.08
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 9.73
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P210768

CATALOG NUMBER: LSR4B10D010BZ EC4B10209027 4LBWGPH1

Luminous Intensity Polar Plot

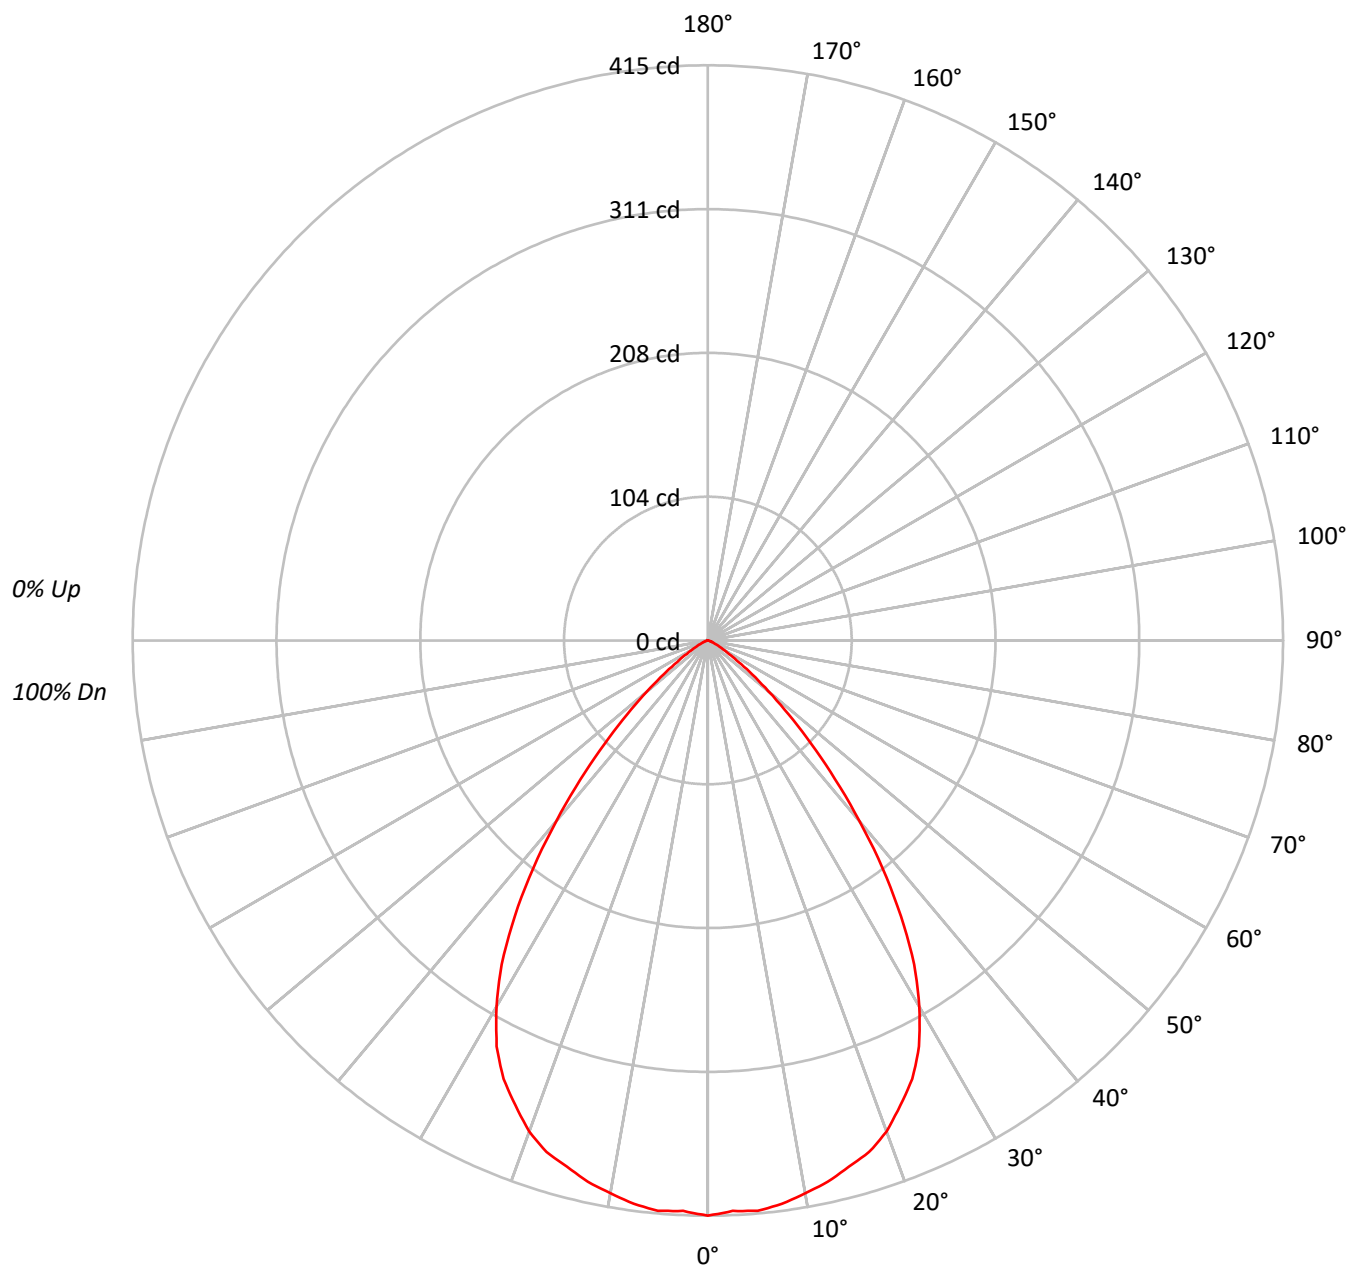



TEST NUMBER: P210768

CATALOG NUMBER: LSR4B10D010BZ EC4B10209027 4LBWGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	107	104	110	107	105	103		103	101	99		100	98	96		96	95	94
2	106	100	96	92	104	99	95	91		95	92	89		92	90	87		90	87	85
3	100	92	87	82	98	91	86	81		88	84	80		86	82	79		83	80	77
4	94	85	78	74	92	84	78	73		81	76	72		79	75	71		77	74	71
5	88	78	72	67	86	77	71	66		75	70	66		74	69	65		72	68	64
6	83	72	65	61	81	71	65	60		70	64	60		68	63	59		67	63	59
7	78	67	60	55	76	66	60	55		65	59	55		64	58	55		63	58	54
8	73	62	56	51	72	62	55	51		61	55	51		59	54	50		58	54	50
9	69	58	51	47	68	58	51	47		57	51	47		56	50	46		55	50	46
10	65	54	48	43	64	54	48	43		53	47	43		52	47	43		51	46	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	45343
5°	45297
10°	44933
15°	44454
20°	43835
25°	42074
30°	38480
35°	32412
40°	24247
45°	16224
50°	9689
55°	5143
60°	2841
65°	1551
70°	958
75°	422
80°	629
85°	0



TEST NUMBER: P210768

CATALOG NUMBER: LSR4B10D010BZ EC4B10209027 4LBWGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	39.1	6.8
10°-20°	110.9	19.2
20°-30°	159.1	27.6
30°-40°	149.8	26.0
40°-50°	82.7	14.3
50°-60°	26.5	4.6
60°-70°	6.6	1.2
70°-80°	1.6	0.3
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	309.2	53.6
0°-40°	459.0	79.6
0°-60°	568.2	98.6
0°-90°	576.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	576.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	415	
5°	413	39
15°	393	111
25°	349	159
35°	243	150
45°	105	83
55°	27	27
65°	6	7
75°	1	2
85°	0	0
90°	0	



TEST NUMBER: P210768

CATALOG NUMBER: LSR4B10D010BZ EC4B10209027 4LBWGPH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	415
2.5°	412
5°	413
7.5°	410
10°	405
12.5°	400
15°	393
17.5°	387
20°	377
22.5°	363
25°	349
27.5°	330
30°	305
32.5°	277
35°	243
37.5°	207
40°	170
42.5°	136
45°	105
47.5°	79
50°	57
52.5°	40
55°	27
57.5°	18
60°	13
62.5°	9
65°	6
67.5°	4
70°	3
72.5°	2
75°	1
77.5°	1
80°	1
82.5°	0
85°	0
87.5°	0
90°	0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)