

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P210773

Luminaire Tested: **LSR4B10D010BZ EC4B10209727 4LBCSMB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P210773
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B10D010BZ EC4B10209727 4LBCSMB1
Description: PORTFOLIO 4 INCH CYLINDER
SHALLOW DISTRIBUTION WITH CAST MATTE METALLIC SILVER TRIM
WATTAGE D010TR-10.05W DE010-10.58W D5LT-10.2W DMX-10.6W DL2-11.8W
DL3-11.1W DLE-11.39W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 749.1 lumens
Efficiency: N/A
Efficacy: 75.7 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P210773

CATALOG NUMBER: LSR4B10D010BZ EC4B10209727 4LBCSMB1

Luminous Intensity Polar Plot

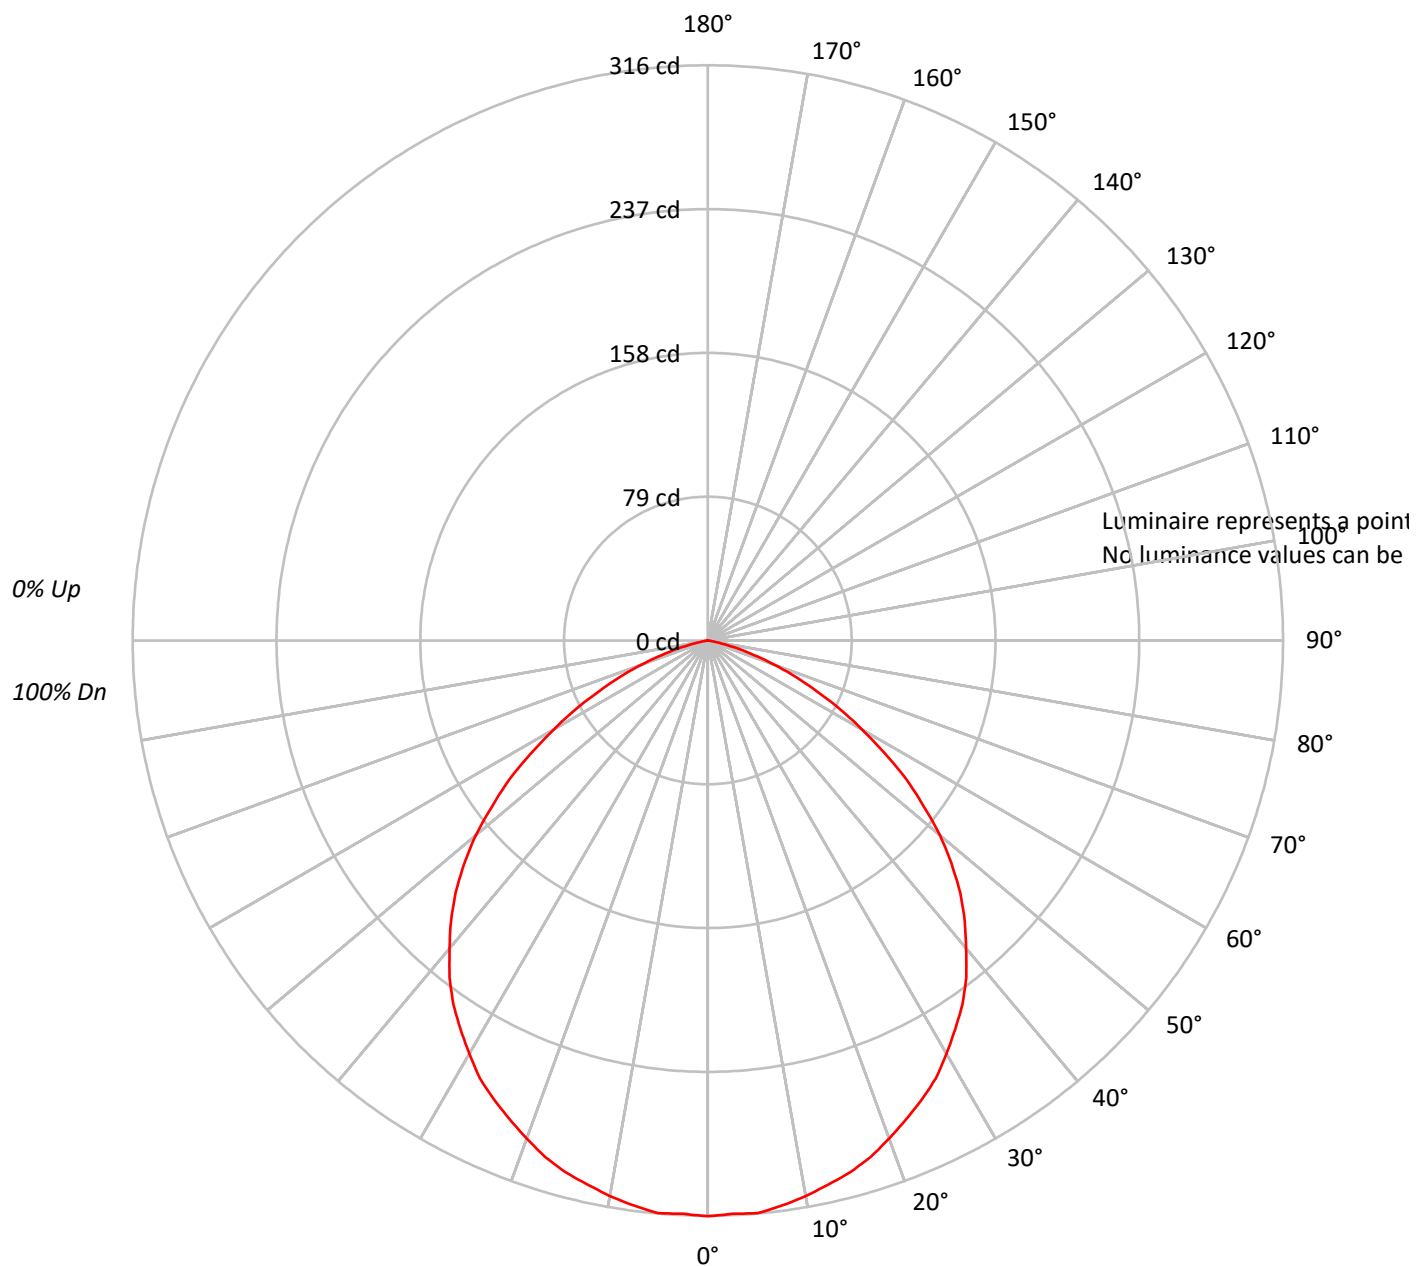



TEST NUMBER: P210773

CATALOG NUMBER: LSR4B10D010BZ EC4B10209727 4LBCSMB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	111	107	103	100		108	104	101	98		100	98	95		96	94	92		93	91	90
2	102	95	89	84		99	93	87	83		89	85	81		86	82	79		83	80	77
3	93	84	77	71		91	83	76	70		80	74	69		77	72	68		74	70	67
4	86	75	67	61		84	74	66	61		71	65	60		69	63	59		67	62	58
5	79	67	59	53		77	66	59	53		64	57	52		62	56	52		61	55	51
6	74	61	53	47		72	60	52	46		58	51	46		57	50	46		55	50	45
7	68	55	47	41		67	55	47	41		53	46	41		52	45	41		50	45	40
8	64	51	43	37		62	50	42	37		49	42	37		48	41	37		46	41	36
9	60	47	39	33		58	46	39	33		45	38	33		44	38	33		43	37	33
10	56	43	35	30		55	43	35	30		42	35	30		41	34	30		40	34	30

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P210773

CATALOG NUMBER: LSR4B10D010BZ EC4B10209727 4LBCSMB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	29.9	4.0
10°-20°	85.2	11.4
20°-30°	128.1	17.1
30°-40°	152.0	20.3
40°-50°	150.4	20.1
50°-60°	118.2	15.8
60°-70°	66.3	8.8
70°-80°	18.6	2.5
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	243.3	32.5
0°-40°	395.3	52.8
0°-60°	664.0	88.6
0°-90°	749.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	749.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	316	
5°	316	30
15°	302	85
25°	278	128
35°	244	152
45°	196	150
55°	133	118
65°	66	66
75°	16	19
85°	0	0
90°	0	



TEST NUMBER: P210773

CATALOG NUMBER: LSR4B10D010BZ EC4B10209727 4LBCSMB1

CANDELA DISTRIBUTION (FULL):

	0°
0°	316.3
2.5°	315.3
5°	315.8
7.5°	313.1
10°	309.9
12.5°	306.1
15°	302.4
17.5°	297.5
20°	291.1
22.5°	284.7
25°	278.2
27.5°	271.2
30°	262.1
32.5°	253.0
35°	243.8
37.5°	233.1
40°	220.7
42.5°	208.9
45°	196.0
47.5°	181.5
50°	166.5
52.5°	149.3
55°	133.2
57.5°	114.9
60°	97.7
62.5°	82.2
65°	66.1
67.5°	52.1
70°	38.7
72.5°	26.3
75°	16.1
77.5°	8.1
80°	2.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)