

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P210990

Luminaire Tested: **LSR4B10D010BZ EC4B10209040 4LBNWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P210990
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B10D010BZ EC4B10209040 4LBNWH1
Description: PORTFOLIO 4 INCH CYLINDER
NARROW DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-10.05W DE010-10.58W D5LT-10.2W DMX-10.6W DL2-11.8W
DL3-11.1W DLE-11.39W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 611.7 lumens
Efficiency: N/A
Efficacy: 61.8 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.62
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P210990

CATALOG NUMBER: LSR4B10D010BZ EC4B10209040 4LBNWH1

Luminous Intensity Polar Plot

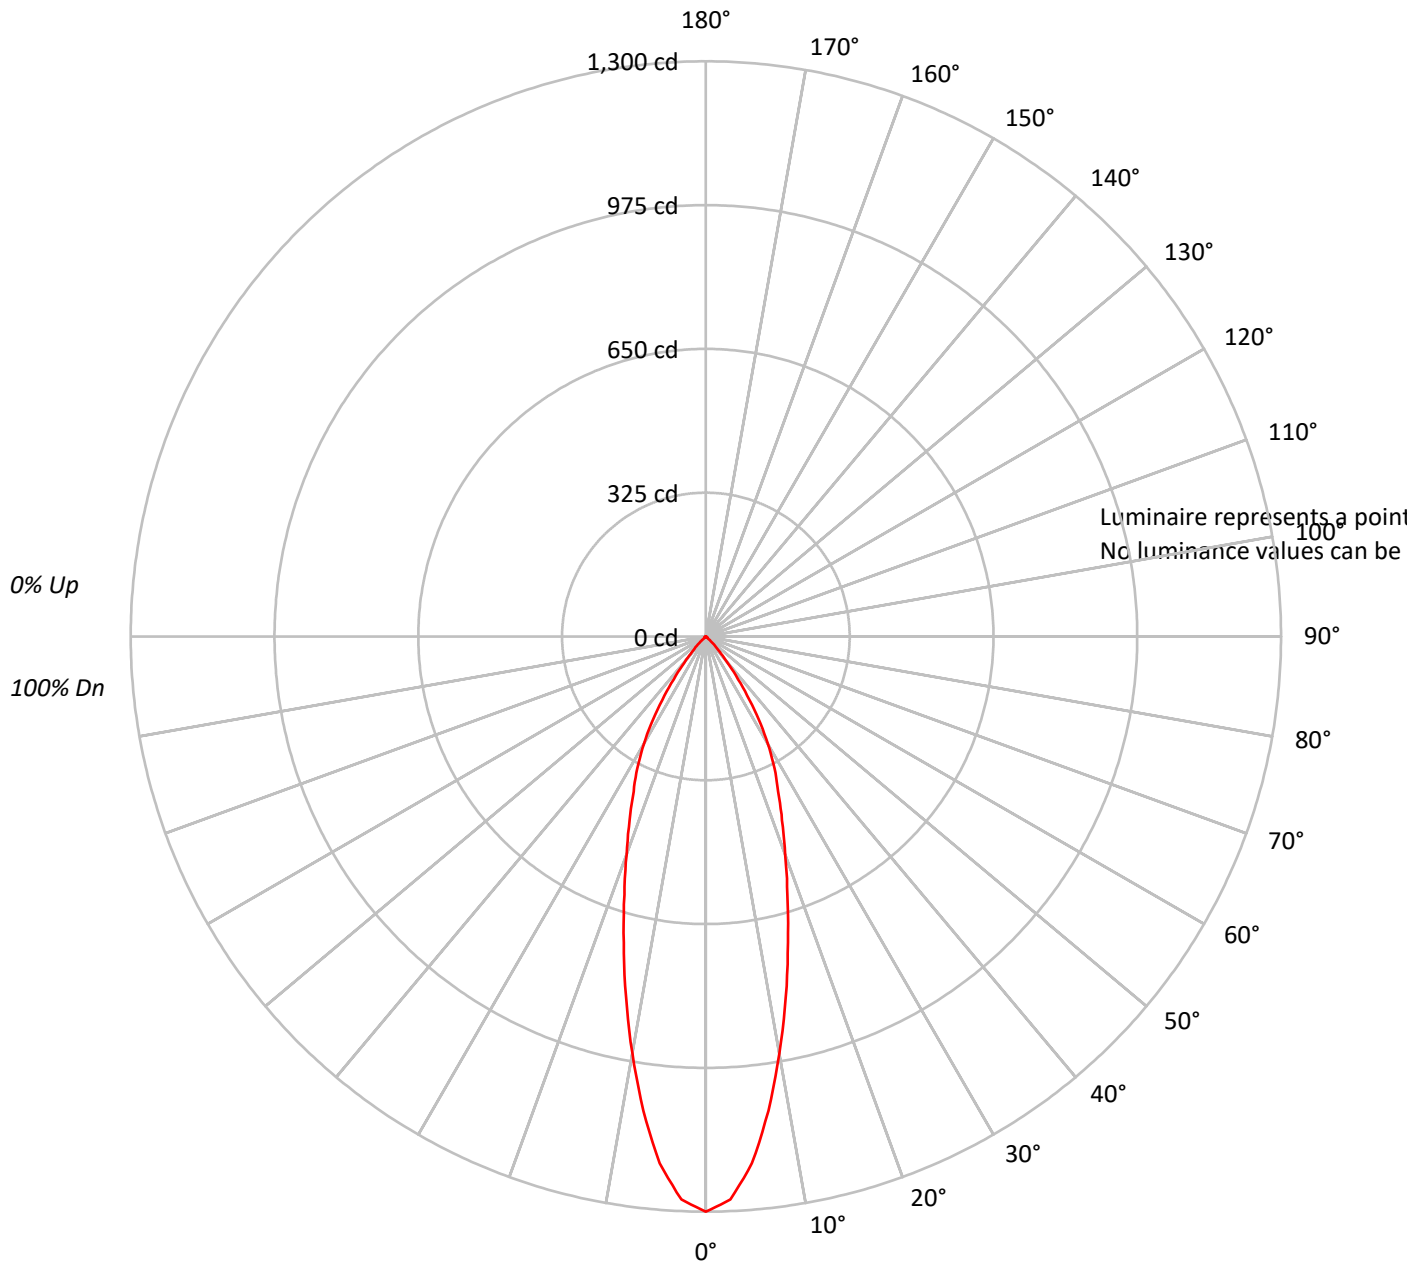




TEST NUMBER: P210990

CATALOG NUMBER: LSR4B10D010BZ EC4B10209040 4LBNWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	109	107		112	109	107	105		105	104	102		102	100	99		98	97	96
2	109	105	101	98		107	103	100	97		100	97	95		97	95	93		94	92	91
3	104	98	94	90		102	97	93	90		94	91	88		92	89	87		90	87	85
4	100	93	88	84		98	92	87	83		90	86	82		88	84	82		86	83	81
5	95	88	82	78		94	87	82	78		85	81	77		83	80	77		82	79	76
6	91	83	78	74		90	82	77	74		81	76	73		79	76	73		78	75	72
7	87	79	73	70		86	78	73	69		77	72	69		76	72	69		75	71	68
8	84	75	70	66		82	74	69	66		73	69	65		72	68	65		71	68	65
9	80	71	66	62		79	71	66	62		70	65	62		69	65	62		68	65	62
10	77	68	63	59		76	68	63	59		67	62	59		66	62	59		66	62	59

AVERAGE LUMINANCE (cd/sqm):

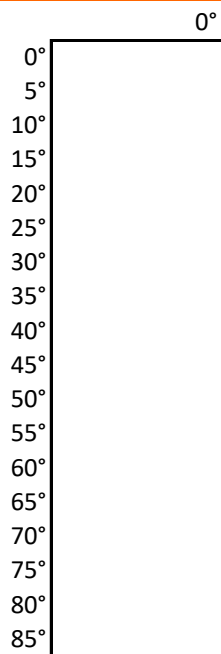



TEST NUMBER: P210990

CATALOG NUMBER: LSR4B10D010BZ EC4B10209040 4LBNWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	106.3	17.4
10°-20°	199.4	32.6
20°-30°	178.9	29.2
30°-40°	102.7	16.8
40°-50°	20.5	3.3
50°-60°	2.6	0.4
60°-70°	1.2	0.2
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	484.7	79.2
0°-40°	587.3	96.0
0°-60°	610.4	99.8
0°-90°	611.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	611.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1300	
5°	1196	106
15°	716	199
25°	386	179
35°	163	103
45°	22	20
55°	3	3
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P210990

CATALOG NUMBER: LSR4B10D010BZ EC4B10209040 4LBNWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1300.1
2.5°	1273.7
5°	1195.5
7.5°	1081.4
10°	956.8
12.5°	834.3
15°	716.0
17.5°	612.5
20°	523.8
22.5°	449.9
25°	386.5
27.5°	335.8
30°	279.9
32.5°	222.8
35°	162.6
37.5°	110.9
40°	68.6
42.5°	41.2
45°	22.2
47.5°	9.5
50°	4.2
52.5°	3.2
55°	3.2
57.5°	2.1
60°	2.1
62.5°	1.1
65°	1.1
67.5°	1.1
70°	1.1
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)