

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211070

Luminaire Tested: **LSR4B15D010BZ EC4B10209024 4LBMMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P211070  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR4B15D010BZ EC4B10209024 4LBMMW1  
Description: PORTFOLIO 4 INCH CYLINDER  
MEDIUM DISTRIBUTION WITH MATTE WHITE TRIM  
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W  
DL3-15.28W DLE-15.432W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 845.8 lumens  
Efficiency: N/A  
Efficacy: 59.1 lumens/watt  
Spacing Criteria (0/90/45): 0.99 / 0.99 / 0.97  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P211070

CATALOG NUMBER: LSR4B15D010BZ EC4B10209024 4LBMMW1

### Luminous Intensity Polar Plot

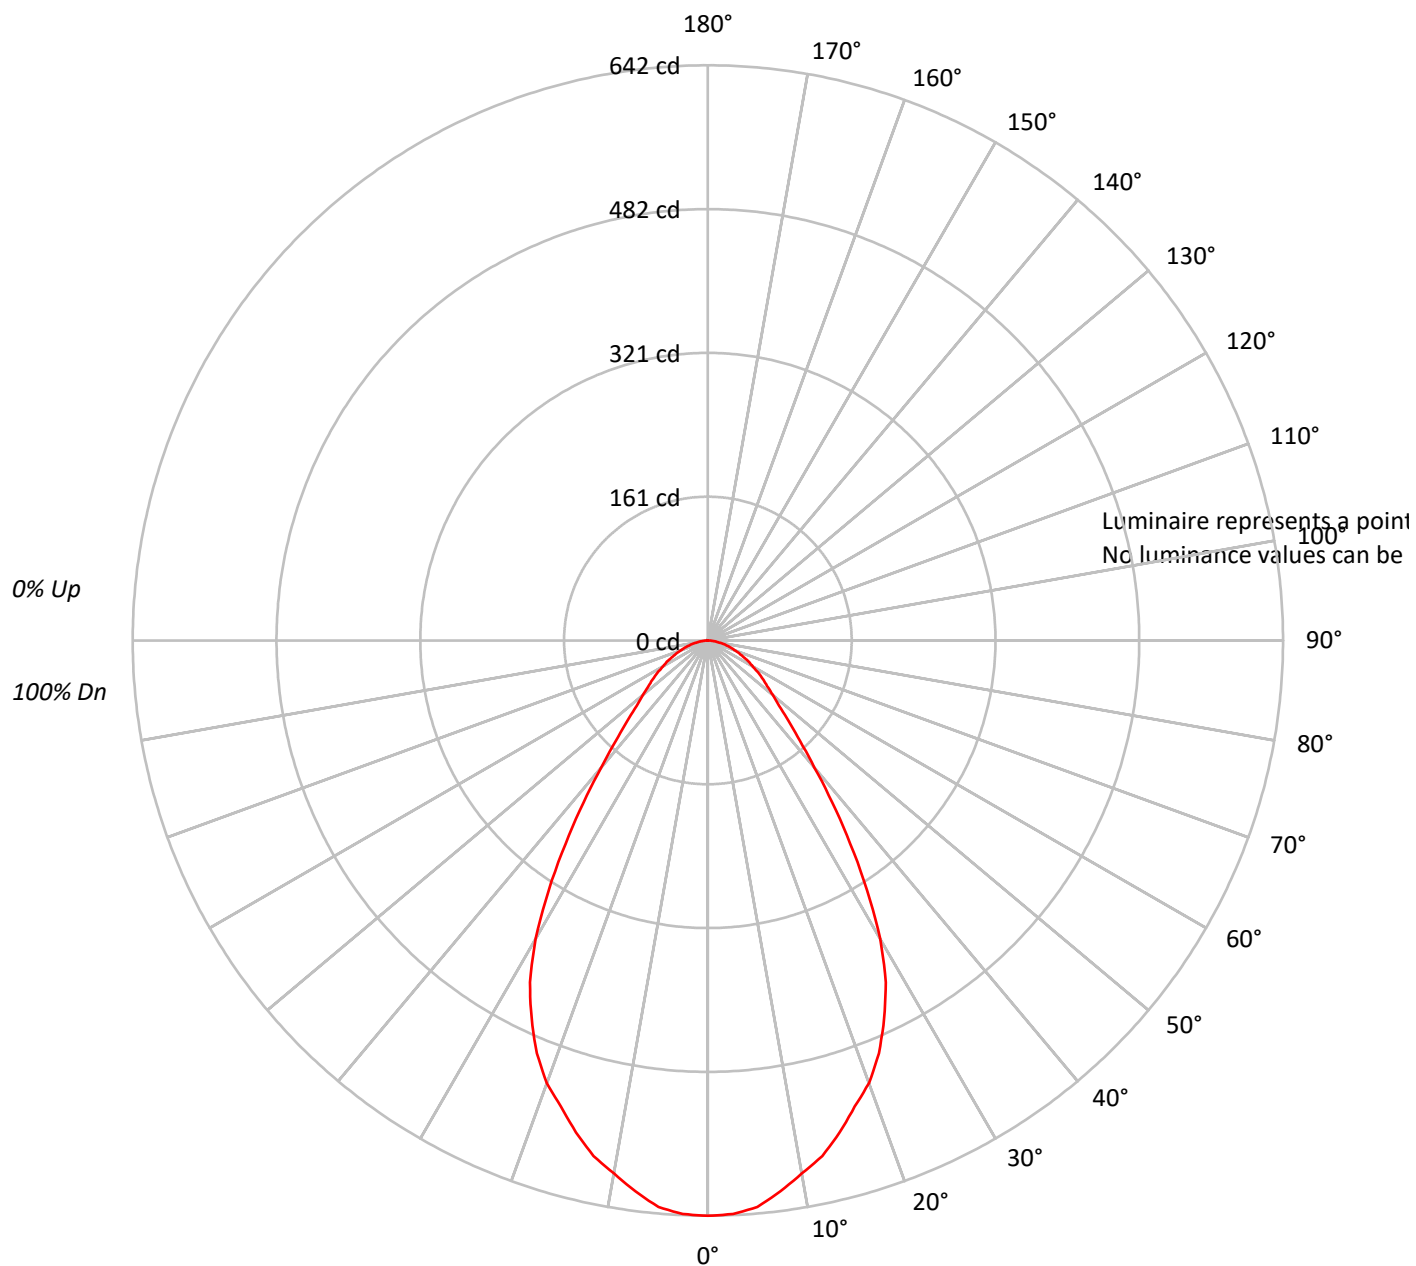



TEST NUMBER: P211070

CATALOG NUMBER: LSR4B15D010BZ EC4B10209024 4LBMMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 112 | 108 | 105 | 102 | 109 | 106 | 103 | 100 | 102 | 99  | 97  |  | 98  | 96  | 94  |  | 94  |
| 2   | 104 | 98  | 92  | 88  | 102 | 96  | 91  | 87  | 93  | 89  | 85  |  | 89  | 86  | 83  |  | 87  |
| 3   | 97  | 89  | 83  | 77  | 95  | 87  | 82  | 77  | 85  | 80  | 76  |  | 82  | 78  | 74  |  | 80  |
| 4   | 91  | 81  | 74  | 69  | 89  | 80  | 74  | 69  | 78  | 72  | 68  |  | 76  | 71  | 67  |  | 74  |
| 5   | 85  | 75  | 67  | 62  | 83  | 74  | 67  | 62  | 72  | 66  | 61  |  | 70  | 65  | 61  |  | 68  |
| 6   | 80  | 69  | 62  | 56  | 78  | 68  | 61  | 56  | 66  | 60  | 56  |  | 65  | 59  | 55  |  | 63  |
| 7   | 75  | 64  | 57  | 52  | 74  | 63  | 56  | 51  | 62  | 56  | 51  |  | 60  | 55  | 51  |  | 59  |
| 8   | 71  | 59  | 52  | 47  | 69  | 59  | 52  | 47  | 58  | 51  | 47  |  | 56  | 51  | 47  |  | 55  |
| 9   | 67  | 55  | 48  | 44  | 66  | 55  | 48  | 44  | 54  | 48  | 44  |  | 53  | 47  | 43  |  | 52  |
| 10  | 63  | 52  | 45  | 41  | 62  | 51  | 45  | 41  | 51  | 45  | 40  |  | 50  | 44  | 40  |  | 49  |

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P211070

CATALOG NUMBER: LSR4B15D010BZ EC4B10209024 4LBMMW1

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 59.5   | 7.0       |
| 10°-20°   | 159.5  | 18.9      |
| 20°-30°   | 212.1  | 25.1      |
| 30°-40°   | 173.5  | 20.5      |
| 40°-50°   | 101.0  | 11.9      |
| 50°-60°   | 67.0   | 7.9       |
| 60°-70°   | 44.1   | 5.2       |
| 70°-80°   | 23.3   | 2.8       |
| 80°-90°   | 5.7    | 0.7       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 431.2  | 51.0      |
| 0°-40°    | 604.7  | 71.5      |
| 0°-60°    | 772.7  | 91.4      |
| 0°-90°    | 845.8  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 845.8  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 642 |      |
| 5°  | 635 | 60   |
| 15° | 568 | 160  |
| 25° | 466 | 212  |
| 35° | 277 | 173  |
| 45° | 127 | 101  |
| 55° | 75  | 67   |
| 65° | 44  | 44   |
| 75° | 22  | 23   |
| 85° | 5   | 6    |
| 90° | 0   |      |



TEST NUMBER: P211070

CATALOG NUMBER: LSR4B15D010BZ EC4B10209024 4LBMMW1

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 642.1 |
| 2.5°  | 640.8 |
| 5°    | 634.7 |
| 7.5°  | 620.0 |
| 10°   | 604.1 |
| 12.5° | 589.4 |
| 15°   | 568.5 |
| 17.5° | 545.3 |
| 20°   | 525.7 |
| 22.5° | 498.7 |
| 25°   | 465.6 |
| 27.5° | 430.1 |
| 30°   | 384.7 |
| 32.5° | 330.8 |
| 35°   | 276.9 |
| 37.5° | 227.9 |
| 40°   | 185.0 |
| 42.5° | 151.9 |
| 45°   | 127.4 |
| 47.5° | 107.8 |
| 50°   | 94.3  |
| 52.5° | 83.3  |
| 55°   | 74.7  |
| 57.5° | 66.2  |
| 60°   | 57.6  |
| 62.5° | 51.5  |
| 65°   | 44.1  |
| 67.5° | 38.0  |
| 70°   | 31.9  |
| 72.5° | 27.0  |
| 75°   | 22.1  |
| 77.5° | 17.2  |
| 80°   | 12.3  |
| 82.5° | 8.6   |
| 85°   | 4.9   |
| 87.5° | 1.2   |
| 90°   | 0.0   |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)