

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211090

Luminaire Tested: **LSR4B15D010BZ EC4B10209024 4LBWMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P211090  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR4B15D010BZ EC4B10209024 4LBWMW1  
Description: PORTFOLIO 4 INCH CYLINDER  
WIDE DISTRIBUTION WITH MATTE WHITE TRIM  
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W  
DL3-15.28W DLE-15.432W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 943.8 lumens  
Efficiency: N/A  
Efficacy: 66.0 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.09  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P211090

CATALOG NUMBER: LSR4B15D010BZ EC4B10209024 4LBWMW1

### Luminous Intensity Polar Plot

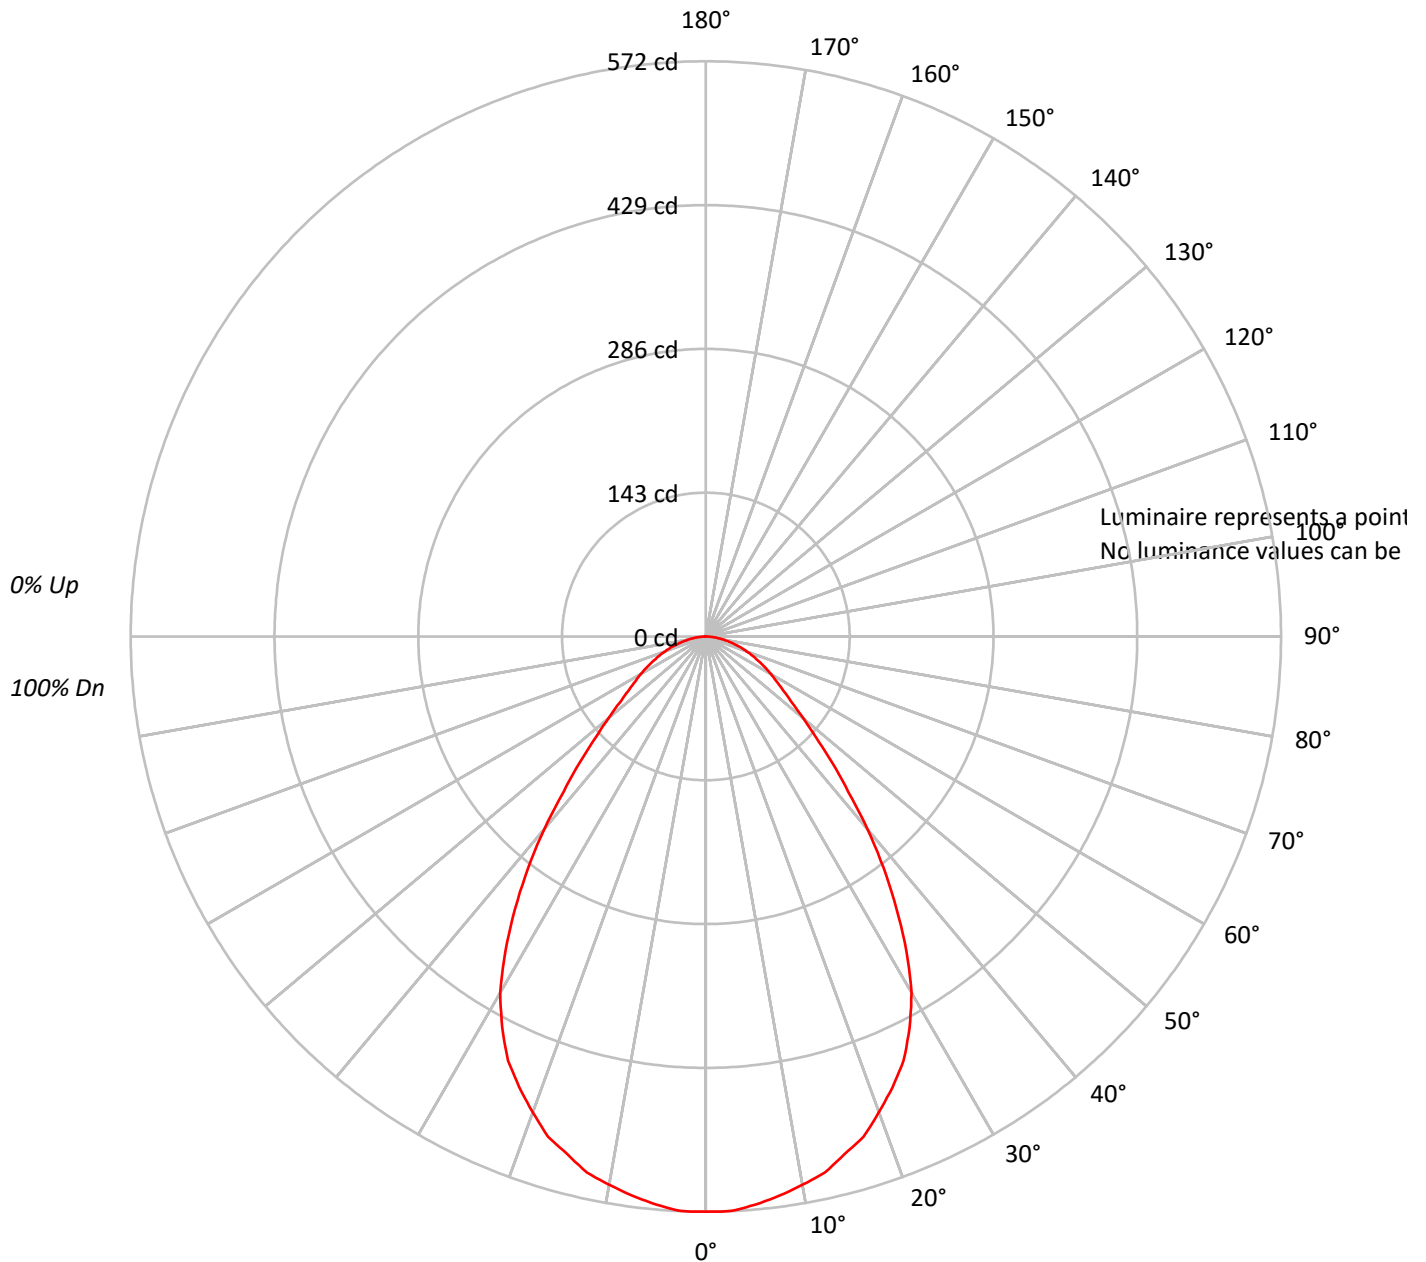



TEST NUMBER: P211090

CATALOG NUMBER: LSR4B15D010BZ EC4B10209024 4LBWMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |   |  |  |  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    |    | 0 |  |  |  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |  |  |  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |  |  |  |
| 1   | 111 | 107 | 104 | 101 | 108 | 105 | 102 | 99  | 101 | 98  | 96  | 97  | 95  | 93  | 93  | 92  | 90  | 88  |    |    |   |  |  |  |
| 2   | 103 | 96  | 91  | 86  | 101 | 94  | 89  | 85  | 91  | 87  | 83  | 88  | 84  | 81  | 85  | 82  | 80  | 78  |    |    |   |  |  |  |
| 3   | 96  | 87  | 80  | 75  | 93  | 85  | 79  | 74  | 83  | 77  | 73  | 80  | 76  | 72  | 78  | 74  | 71  | 69  |    |    |   |  |  |  |
| 4   | 89  | 79  | 72  | 66  | 87  | 78  | 71  | 66  | 75  | 69  | 65  | 73  | 68  | 64  | 71  | 67  | 63  | 61  |    |    |   |  |  |  |
| 5   | 83  | 72  | 64  | 59  | 81  | 71  | 64  | 58  | 69  | 63  | 58  | 67  | 62  | 57  | 65  | 61  | 57  | 55  |    |    |   |  |  |  |
| 6   | 78  | 66  | 58  | 53  | 76  | 65  | 58  | 53  | 64  | 57  | 52  | 62  | 56  | 52  | 60  | 55  | 51  | 50  |    |    |   |  |  |  |
| 7   | 73  | 61  | 53  | 48  | 71  | 60  | 53  | 48  | 59  | 52  | 47  | 57  | 51  | 47  | 56  | 51  | 47  | 45  |    |    |   |  |  |  |
| 8   | 68  | 56  | 49  | 44  | 67  | 56  | 49  | 44  | 54  | 48  | 43  | 53  | 47  | 43  | 52  | 47  | 43  | 41  |    |    |   |  |  |  |
| 9   | 64  | 52  | 45  | 40  | 63  | 52  | 45  | 40  | 51  | 44  | 40  | 50  | 44  | 40  | 49  | 43  | 39  | 38  |    |    |   |  |  |  |
| 10  | 61  | 49  | 42  | 37  | 59  | 48  | 41  | 37  | 47  | 41  | 37  | 46  | 41  | 37  | 46  | 40  | 36  | 35  |    |    |   |  |  |  |

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P211090

CATALOG NUMBER: LSR4B15D010BZ EC4B10209024 4LBWMW1

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 53.7   | 5.7       |
| 10°-20°   | 150.2  | 15.9      |
| 20°-30°   | 212.2  | 22.5      |
| 30°-40°   | 205.6  | 21.8      |
| 40°-50°   | 138.7  | 14.7      |
| 50°-60°   | 86.1   | 9.1       |
| 60°-70°   | 57.5   | 6.1       |
| 70°-80°   | 31.5   | 3.3       |
| 80°-90°   | 8.3    | 0.9       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 416.1  | 44.1      |
| 0°-40°    | 621.7  | 65.9      |
| 0°-60°    | 846.5  | 89.7      |
| 0°-90°    | 943.8  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 943.8  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 572 |      |
| 5°  | 567 | 54   |
| 15° | 533 | 150  |
| 25° | 465 | 212  |
| 35° | 331 | 206  |
| 45° | 178 | 139  |
| 55° | 94  | 86   |
| 65° | 58  | 58   |
| 75° | 29  | 31   |
| 85° | 7   | 8    |
| 90° | 0   |      |



TEST NUMBER: P211090

CATALOG NUMBER: LSR4B15D010BZ EC4B10209024 4LBWMW1

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 572.0 |
| 2.5°  | 572.0 |
| 5°    | 567.1 |
| 7.5°  | 560.9 |
| 10°   | 553.6 |
| 12.5° | 546.2 |
| 15°   | 532.8 |
| 17.5° | 521.7 |
| 20°   | 503.4 |
| 22.5° | 485.0 |
| 25°   | 465.4 |
| 27.5° | 438.5 |
| 30°   | 409.1 |
| 32.5° | 371.1 |
| 35°   | 330.7 |
| 37.5° | 290.3 |
| 40°   | 249.8 |
| 42.5° | 209.4 |
| 45°   | 177.6 |
| 47.5° | 148.2 |
| 50°   | 126.1 |
| 52.5° | 107.8 |
| 55°   | 94.3  |
| 57.5° | 83.3  |
| 60°   | 74.7  |
| 62.5° | 66.1  |
| 65°   | 57.6  |
| 67.5° | 50.2  |
| 70°   | 42.9  |
| 72.5° | 36.7  |
| 75°   | 29.4  |
| 77.5° | 23.3  |
| 80°   | 17.1  |
| 82.5° | 12.2  |
| 85°   | 7.3   |
| 87.5° | 2.4   |
| 90°   | 0.0   |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)