

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211302

Luminaire Tested: **LSR4B15D010BZ EC4B10209035 4LBMMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211302
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B15D010BZ EC4B10209035 4LBMMW1
Description: PORTFOLIO 4 INCH CYLINDER
MEDIUM DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1013.7 lumens
Efficiency: N/A
Efficacy: 70.9 lumens/watt
Spacing Criteria (0/90/45): 0.99 / 0.99 / 0.97
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211302

CATALOG NUMBER: LSR4B15D010BZ EC4B10209035 4LBMMW1

Luminous Intensity Polar Plot

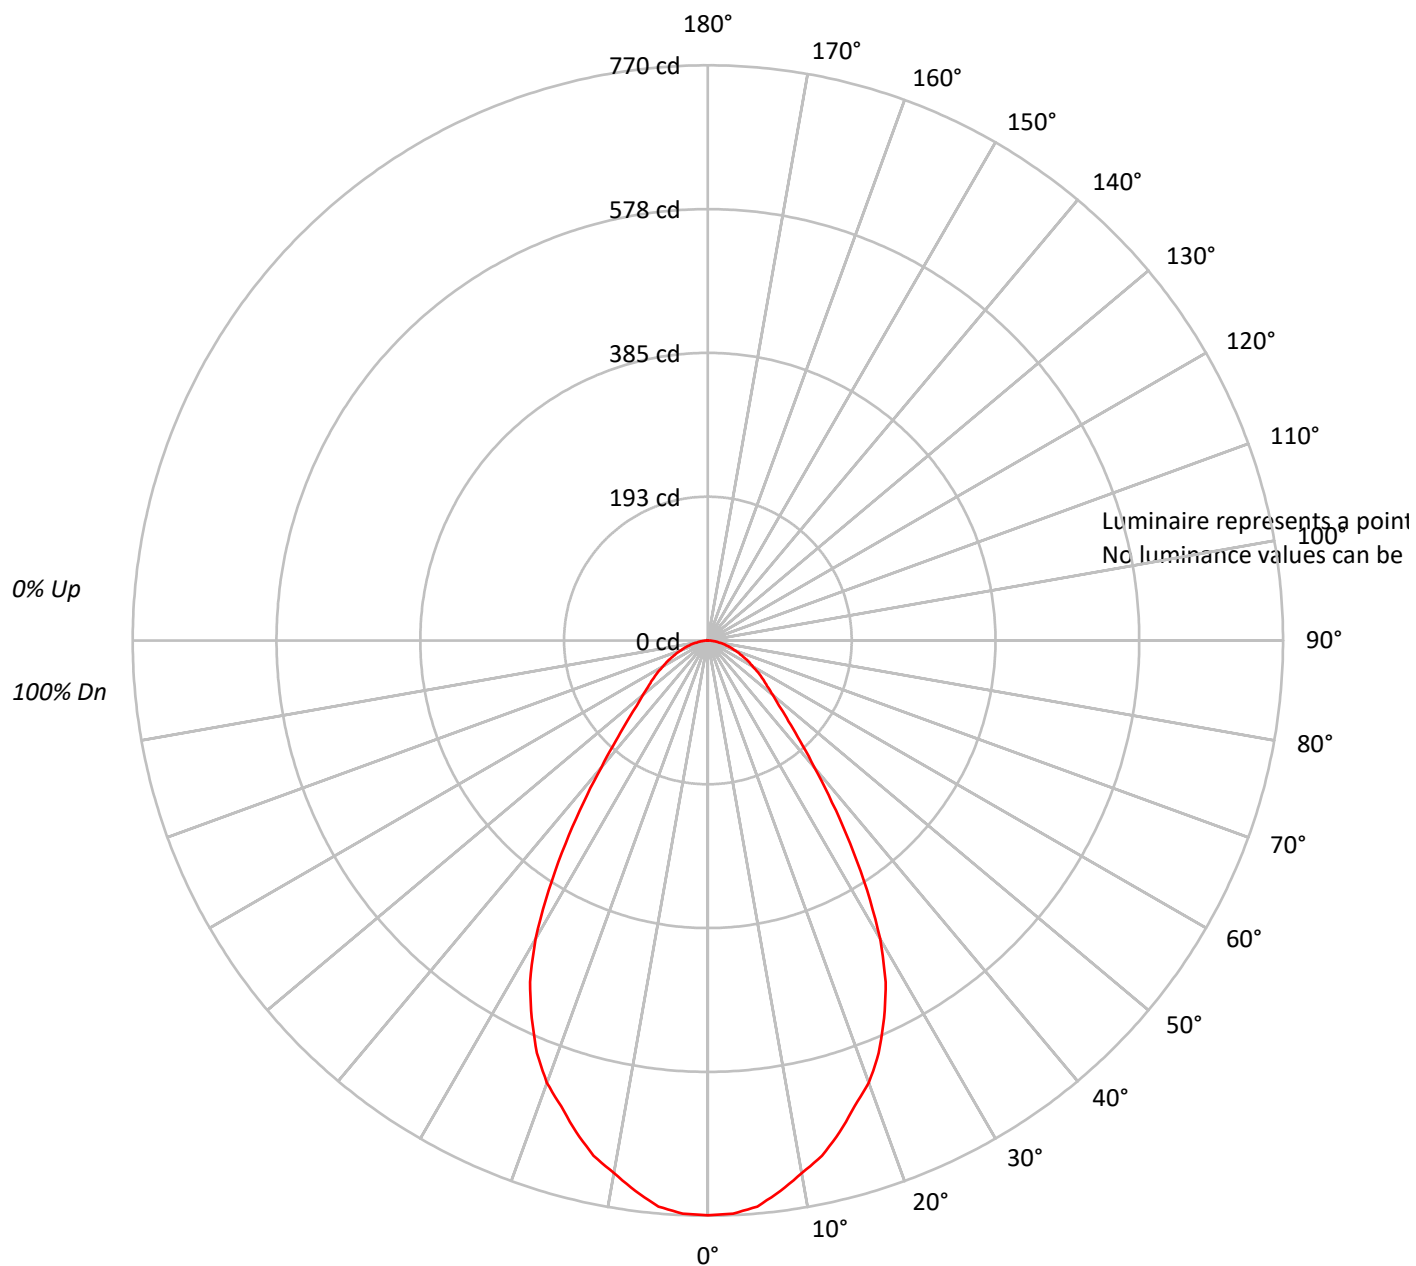



TEST NUMBER: P211302

CATALOG NUMBER: LSR4B15D010BZ EC4B10209035 4LBMMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10			50	30	10			50
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111			106	106	106			102
1	112	108	105	102		109	106	103	100		102	99	97			98	96	94			94
2	104	98	92	88		102	96	91	87		93	89	85			89	86	83			87
3	97	89	83	77		95	87	82	77		85	80	76			82	78	74			80
4	91	81	74	69		89	80	74	69		78	72	68			76	71	67			74
5	85	75	67	62		83	74	67	62		72	66	61			70	65	61			68
6	80	69	62	56		78	68	61	56		66	60	56			65	59	55			63
7	75	64	57	52		74	63	56	51		62	56	51			60	55	51			59
8	71	59	52	47		69	59	52	47		58	51	47			56	51	47			55
9	67	55	48	44		66	55	48	44		54	48	44			53	47	43			52
10	63	52	45	41		62	51	45	41		51	45	40			50	44	40			49

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211302

CATALOG NUMBER: LSR4B15D010BZ EC4B10209035 4LBMMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	71.3	7.0
10°-20°	191.2	18.9
20°-30°	254.3	25.1
30°-40°	207.9	20.5
40°-50°	121.1	11.9
50°-60°	80.3	7.9
60°-70°	52.8	5.2
70°-80°	27.9	2.8
80°-90°	6.8	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	516.8	51.0
0°-40°	724.7	71.5
0°-60°	926.2	91.4
0°-90°	1013.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1013.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	770	
5°	761	71
15°	681	191
25°	558	254
35°	332	208
45°	153	121
55°	90	80
65°	53	53
75°	26	28
85°	6	7
90°	0	



TEST NUMBER: P211302

CATALOG NUMBER: LSR4B15D010BZ EC4B10209035 4LBMMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	769.5
2.5°	768.0
5°	760.7
7.5°	743.1
10°	724.0
12.5°	706.4
15°	681.4
17.5°	653.5
20°	630.0
22.5°	597.7
25°	558.0
27.5°	515.5
30°	461.1
32.5°	396.5
35°	331.9
37.5°	273.1
40°	221.7
42.5°	182.1
45°	152.7
47.5°	129.2
50°	113.1
52.5°	99.9
55°	89.6
57.5°	79.3
60°	69.0
62.5°	61.7
65°	52.9
67.5°	45.5
70°	38.2
72.5°	32.3
75°	26.4
77.5°	20.6
80°	14.7
82.5°	10.3
85°	5.9
87.5°	1.5
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)