

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211336

Luminaire Tested: **LSR4B15D010BZ EC4B10208040 4LBNI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211336
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B15D010BZ EC4B10208040 4LBNLI1
Description: PORTFOLIO 4 INCH CYLINDER
NARROW DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1140.2 lumens
Efficiency: N/A
Efficacy: 79.7 lumens/watt
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211336

CATALOG NUMBER: LSR4B15D010BZ EC4B10208040 4LBNI1

Luminous Intensity Polar Plot

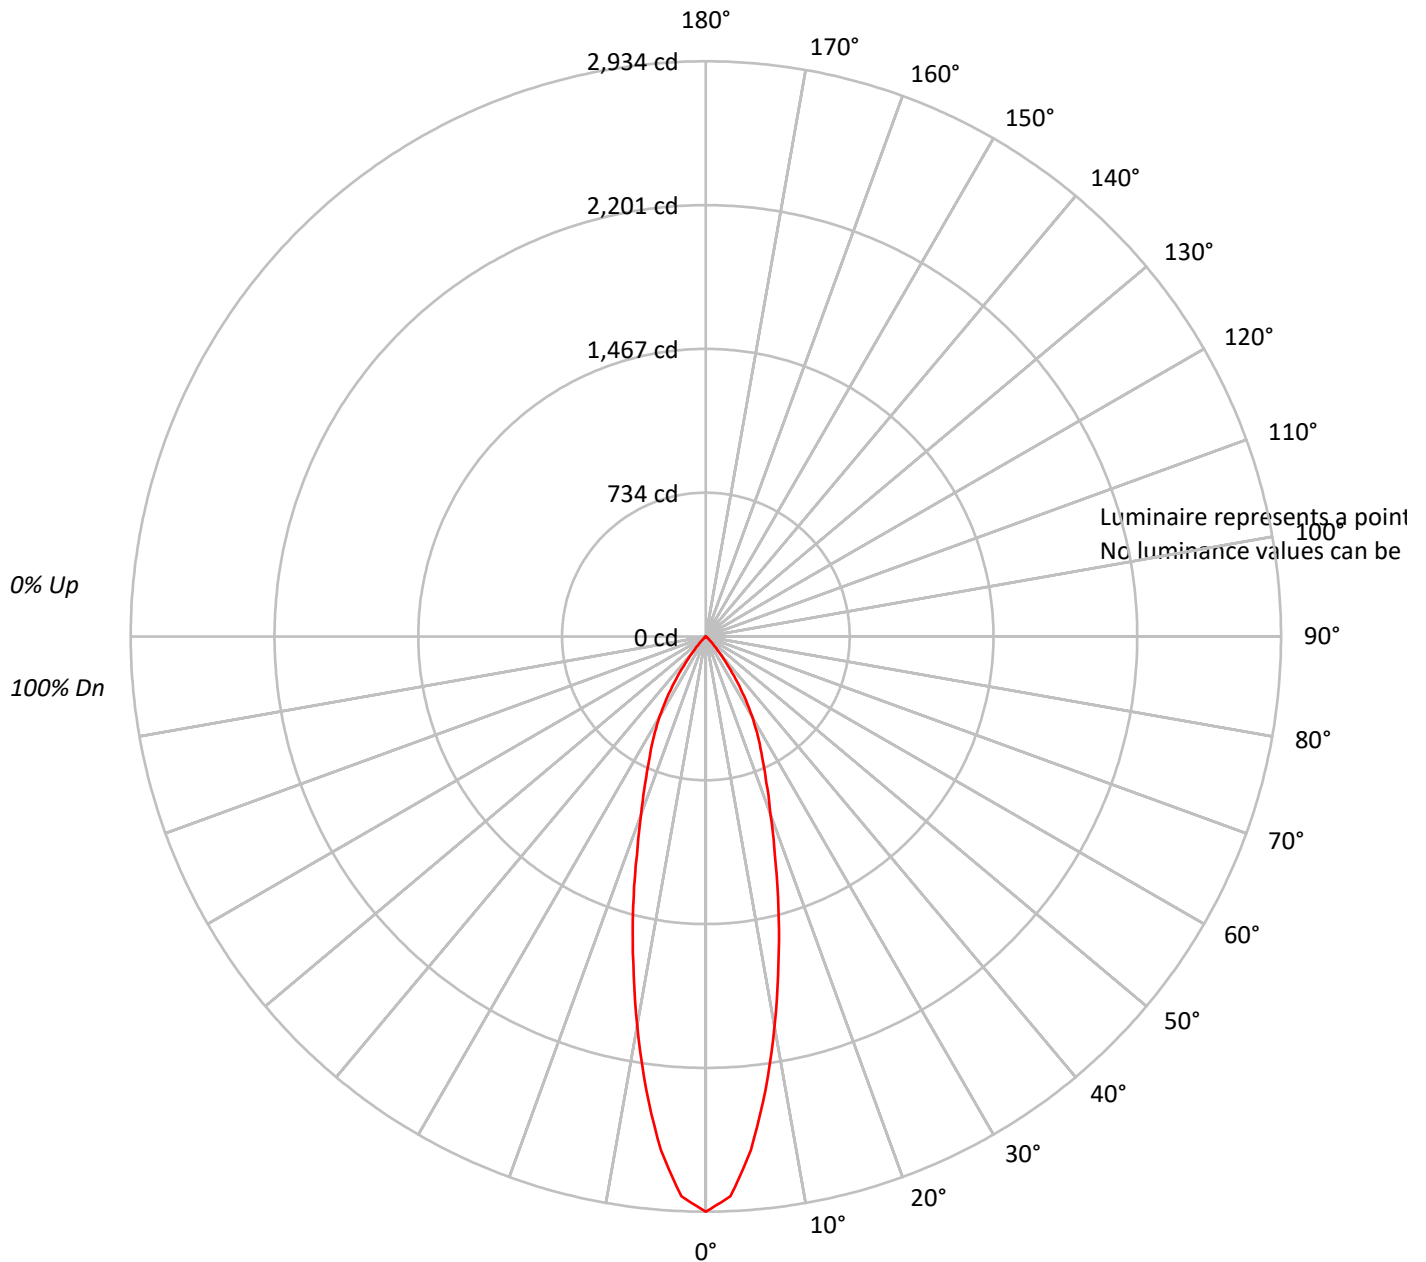



TEST NUMBER: P211336

CATALOG NUMBER: LSR4B15D010BZ EC4B10208040 4LBNLI1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	109	105	102	99	107	103	100	98	100	98	95		97	95	93		95
3	105	99	95	92	103	98	94	91	95	92	89		93	90	88		91
4	101	94	89	86	99	93	88	85	91	87	84		89	86	83		87
5	96	89	84	80	95	88	84	80	87	82	79		85	81	79		83
6	92	85	80	76	91	84	79	76	83	78	75		81	78	75		80
7	89	81	76	72	88	80	75	72	79	75	71		78	74	71		77
8	85	77	72	68	84	77	72	68	76	71	68		75	71	68		74
9	82	74	69	65	81	73	68	65	72	68	65		72	68	65		71
10	79	71	66	62	78	70	65	62	69	65	62		69	65	62		68

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211336

CATALOG NUMBER: LSR4B15D010BZ EC4B10208040 4LBNLI1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	231.2	20.3
10°-20°	395.9	34.7
20°-30°	314.6	27.6
30°-40°	166.5	14.6
40°-50°	28.7	2.5
50°-60°	2.2	0.2
60°-70°	1.1	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	941.7	82.6
0°-40°	1108.3	97.2
0°-60°	1139.1	99.9
0°-90°	1140.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1140.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2934	
5°	2630	231
15°	1431	396
25°	678	315
35°	263	167
45°	30	29
55°	2	2
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P211336

CATALOG NUMBER: LSR4B15D010BZ EC4B10208040 4LBNLI1

CANDELA DISTRIBUTION (FULL):

0°	
0°	2934.2
2.5°	2858.6
5°	2630.4
7.5°	2331.9
10°	2015.8
12.5°	1710.3
15°	1431.1
17.5°	1171.2
20°	964.0
22.5°	806.0
25°	677.8
27.5°	574.2
30°	470.6
32.5°	365.2
35°	263.4
37.5°	173.8
40°	103.6
42.5°	59.7
45°	29.9
47.5°	10.5
50°	3.5
52.5°	3.5
55°	1.8
57.5°	1.8
60°	1.8
62.5°	1.8
65°	1.8
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)