

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P433568

Luminaire Tested: **LAMR4B108R609035DE010x1MMS**

Issue Date: 11/23/2020

Test Information

Test Method: LM-41-14
Report Number: P433568
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2009-969-1)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 11/23/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LAMR4B108R609035DE010x1MMS
Description: PORTFOLIO 4INCH ADJUSTABLE MULTIPLE, 60 DEG TIR OPTIC
Light Source: HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 775.6 lumens
Efficiency: N/A
Efficacy: 68.0 lumens/watt
Spacing Criteria (0/90/45): 0.96 / 0.96 / 0.89
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 11.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P433568

CATALOG NUMBER: LAMR4B108R609035DE010x1MMS

Luminous Intensity Polar Plot

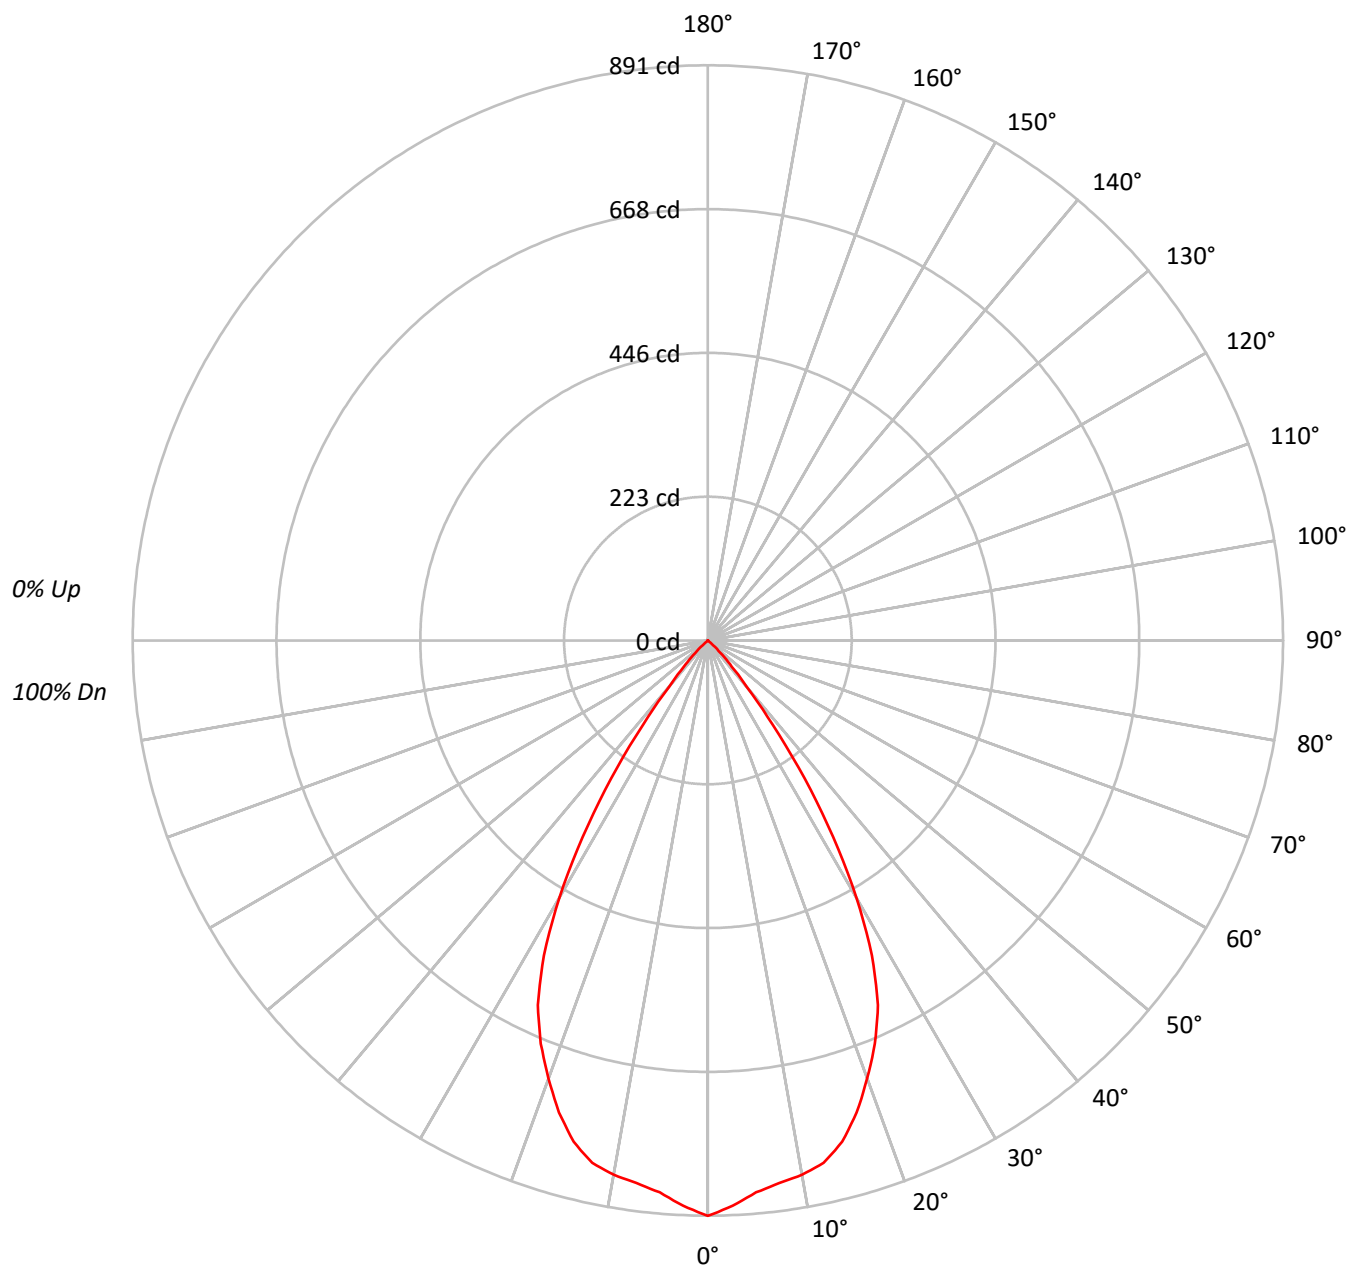



TEST NUMBER: P433568

CATALOG NUMBER: LAMR4B108R609035DE010x1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	111	109	106	111	109	107	105	105	103	102	101	100	99	98	97	96	94		
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88		
3	103	97	92	88	101	96	91	88	93	89	86	91	87	85	88	86	84	82		
4	98	91	85	81	96	90	85	81	88	83	80	86	82	79	84	81	78	77		
5	93	85	80	75	92	84	79	75	83	78	74	81	77	74	79	76	73	72		
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	69	67		
7	84	75	70	66	83	75	69	65	74	69	65	72	68	65	71	67	64	63		
8	80	71	65	61	79	71	65	61	70	65	61	69	64	61	68	64	60	59		
9	77	67	62	58	76	67	61	58	66	61	57	65	60	57	64	60	57	56		
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	52		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	439749
5°	424986
10°	421033
15°	410619
20°	378924
25°	339315
30°	262577
35°	157322
40°	60413
45°	22118
50°	844
55°	688
60°	789
65°	467
70°	577
75°	763
80°	1137
85°	0



TEST NUMBER: P433568

CATALOG NUMBER: LAMR4B108R609035DE010x1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.5	10.5
10°-20°	223.6	28.8
20°-30°	279.0	36.0
30°-40°	162.5	21.0
40°-50°	27.1	3.5
50°-60°	0.7	0.1
60°-70°	0.5	0.1
70°-80°	0.4	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	584.1	75.3
0°-40°	746.6	96.3
0°-60°	774.5	99.9
0°-90°	775.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	775.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	891	
5°	858	81
15°	804	224
25°	623	279
35°	261	163
45°	32	27
55°	1	1
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P433568

CATALOG NUMBER: LAMR4B108R609035DE010x1MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	891.3
2.5°	876.6
5°	858.1
7.5°	847.6
10°	840.4
12.5°	828.7
15°	803.9
17.5°	766.6
20°	721.7
22.5°	676.1
25°	623.3
27.5°	550.2
30°	460.9
32.5°	361.0
35°	261.2
37.5°	164.7
40°	93.8
42.5°	55.0
45°	31.7
47.5°	10.9
50°	1.1
52.5°	0.8
55°	0.8
57.5°	0.8
60°	0.8
62.5°	0.8
65°	0.4
67.5°	0.4
70°	0.4
72.5°	0.4
75°	0.4
77.5°	0.4
80°	0.4
82.5°	0.4
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)