

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P433670

Luminaire Tested: **LAMR4B208R159050DE010x1MMS**

Issue Date: 11/23/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P433670  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1911-585-6)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 11/23/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LAMR4B208R159050DE010x1MMS  
Description: PORTFOLIO 4INCH ADJUSTABLE MULTIPLE, 15 DEG TIR OPTIC  
Light Source: HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1831.7 lumens  
Efficiency: N/A  
Efficacy: 88.9 lumens/watt  
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29  
Luminous Opening: Circular (Dia: 0.29' x H: 0')  
CIE Type: Direct


Input Watts (W): 20.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P433670

CATALOG NUMBER: LAMR4B208R159050DE010x1MMS

### Luminous Intensity Polar Plot

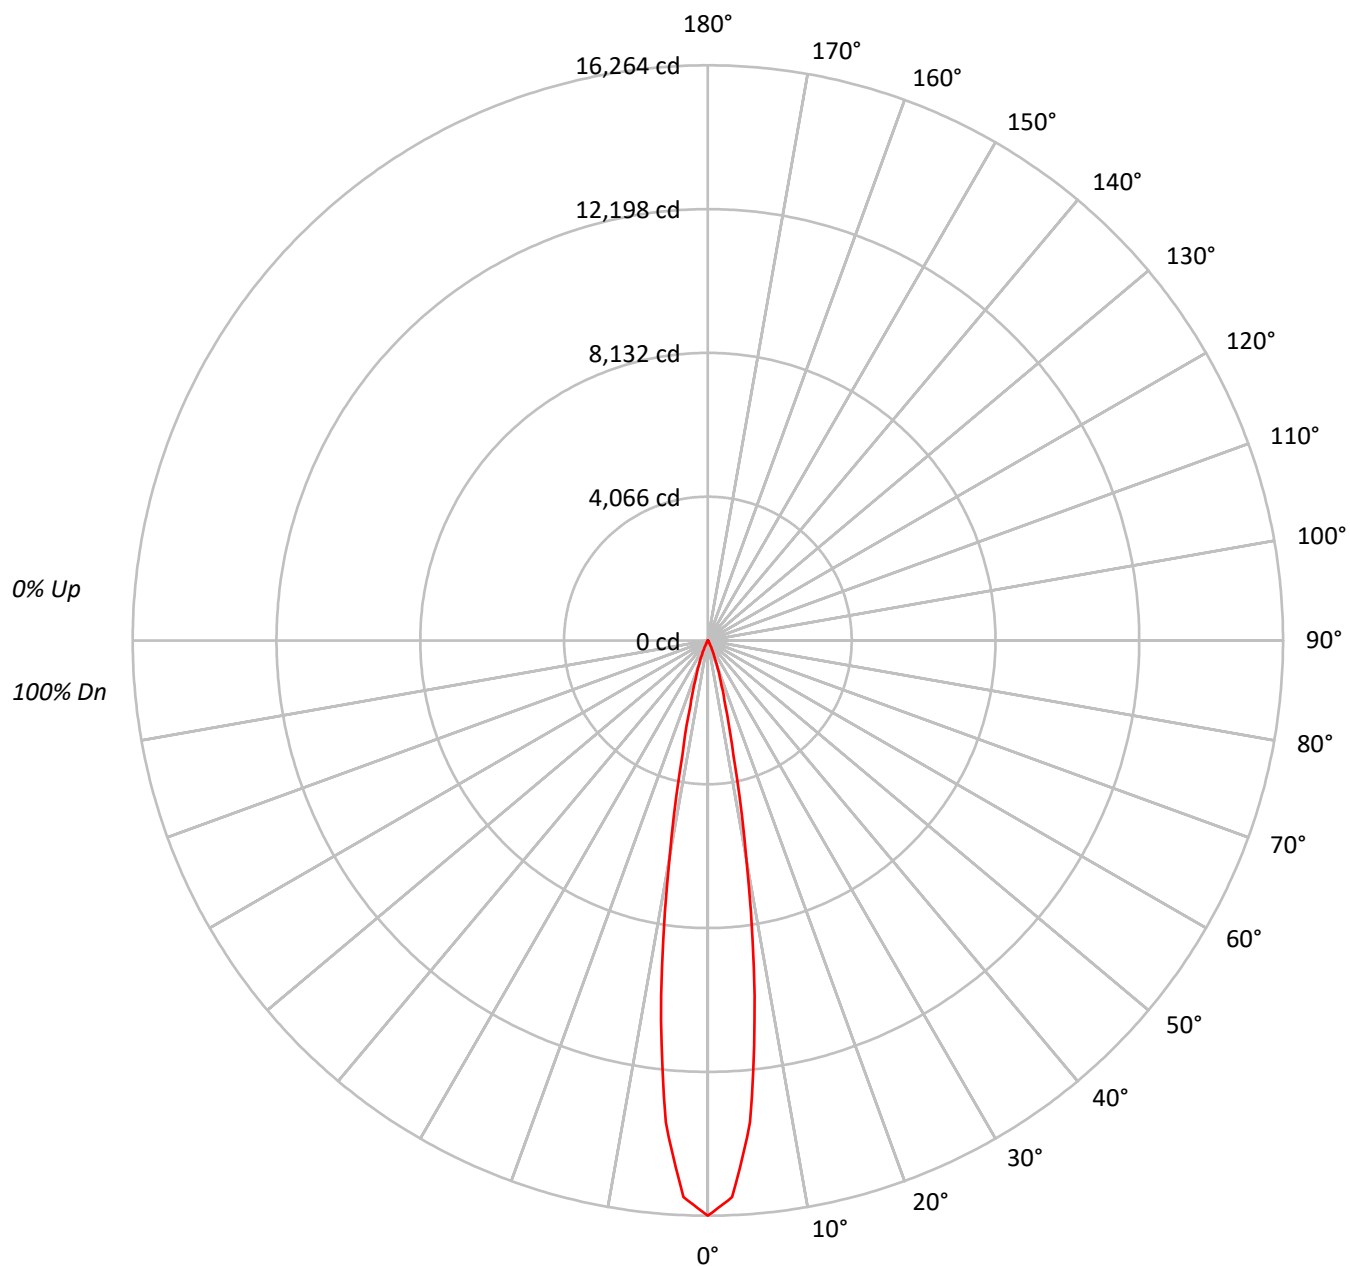



TEST NUMBER: P433670

CATALOG NUMBER: LAMR4B208R159050DE010x1MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| RF  | 20  |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |     |    | 20 |
| RC  | 80  |     |     |     | 70  |     |     |     |     | 50  |     |     |     |     | 30  |     |     |     |    | 10 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |
| 1   | 116 | 114 | 112 | 111 | 113 | 112 | 110 | 109 | 108 | 107 | 106 | 104 | 103 | 103 | 101 | 100 | 100 | 98  |    |    |
| 2   | 113 | 110 | 107 | 105 | 111 | 108 | 106 | 104 | 105 | 103 | 102 | 102 | 101 | 100 | 100 | 99  | 98  | 96  |    |    |
| 3   | 110 | 106 | 103 | 101 | 108 | 105 | 102 | 100 | 103 | 100 | 98  | 100 | 99  | 97  | 98  | 97  | 96  | 94  |    |    |
| 4   | 108 | 103 | 100 | 97  | 106 | 102 | 99  | 97  | 100 | 98  | 96  | 98  | 96  | 95  | 97  | 95  | 94  | 93  |    |    |
| 5   | 105 | 101 | 97  | 95  | 104 | 100 | 97  | 94  | 98  | 96  | 94  | 97  | 95  | 93  | 95  | 94  | 92  | 91  |    |    |
| 6   | 103 | 98  | 95  | 92  | 102 | 98  | 94  | 92  | 96  | 94  | 92  | 95  | 93  | 91  | 94  | 92  | 91  | 90  |    |    |
| 7   | 101 | 96  | 93  | 90  | 100 | 96  | 92  | 90  | 95  | 92  | 90  | 94  | 91  | 89  | 93  | 91  | 89  | 88  |    |    |
| 8   | 99  | 94  | 91  | 89  | 99  | 94  | 91  | 89  | 93  | 90  | 88  | 92  | 90  | 88  | 91  | 89  | 88  | 87  |    |    |
| 9   | 98  | 92  | 89  | 87  | 97  | 92  | 89  | 87  | 91  | 89  | 87  | 91  | 88  | 87  | 90  | 88  | 86  | 86  |    |    |
| 10  | 96  | 91  | 88  | 86  | 95  | 91  | 88  | 86  | 90  | 87  | 85  | 89  | 87  | 85  | 89  | 87  | 85  | 84  |    |    |

**AVERAGE LUMINANCE (cd/sqm):**

|     |         |
|-----|---------|
|     | 0°      |
| 0°  | 2620208 |
| 5°  | 2211348 |
| 10° | 1015937 |
| 15° | 316795  |
| 20° | 129079  |
| 25° | 42342   |
| 30° | 13133   |
| 35° | 2773    |
| 40° | 694     |
| 45° | 0       |
| 50° | 0       |
| 55° | 0       |
| 60° | 0       |
| 65° | 0       |
| 70° | 0       |
| 75° | 0       |
| 80° | 0       |
| 85° | 0       |



TEST NUMBER: P433670

CATALOG NUMBER: LAMR4B208R159050DE010x1MMS

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 1055.2 | 57.6      |
| 10°-20°   | 628.9  | 34.3      |
| 20°-30°   | 133.2  | 7.3       |
| 30°-40°   | 14.0   | 0.8       |
| 40°-50°   | 0.4    | 0.0       |
| 50°-60°   | 0.0    | 0.0       |
| 60°-70°   | 0.0    | 0.0       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1817.3 | 99.2      |
| 0°-40°    | 1831.3 | 100.0     |
| 0°-60°    | 1831.7 | 100.0     |
| 0°-90°    | 1831.7 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1831.7 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°    | Flux |
|-----|-------|------|
| 0°  | 16264 |      |
| 5°  | 13674 | ###  |
| 15° | 1899  | 629  |
| 25° | 238   | 133  |
| 35° | 14    | 14   |
| 45° | 0     | 0    |
| 55° | 0     | 0    |
| 65° | 0     | 0    |
| 75° | 0     | 0    |
| 85° | 0     | 0    |
| 90° | 0     |      |



TEST NUMBER: P433670

CATALOG NUMBER: LAMR4B208R159050DE010x1MMS

**CANDELA DISTRIBUTION (FULL):**

|       | 0°      |
|-------|---------|
| 0°    | 16264.1 |
| 2.5°  | 15750.2 |
| 5°    | 13674.0 |
| 7.5°  | 10122.7 |
| 10°   | 6210.3  |
| 12.5° | 3313.9  |
| 15°   | 1899.4  |
| 17.5° | 1192.9  |
| 20°   | 752.9   |
| 22.5° | 444.1   |
| 25°   | 238.2   |
| 27.5° | 134.5   |
| 30°   | 70.6    |
| 32.5° | 35.7    |
| 35°   | 14.1    |
| 37.5° | 7.5     |
| 40°   | 3.3     |
| 42.5° | 0.8     |
| 45°   | 0.0     |
| 47.5° | 0.0     |
| 50°   | 0.0     |
| 52.5° | 0.0     |
| 55°   | 0.0     |
| 57.5° | 0.0     |
| 60°   | 0.0     |
| 62.5° | 0.0     |
| 65°   | 0.0     |
| 67.5° | 0.0     |
| 70°   | 0.0     |
| 72.5° | 0.0     |
| 75°   | 0.0     |
| 77.5° | 0.0     |
| 80°   | 0.0     |
| 82.5° | 0.0     |
| 85°   | 0.0     |
| 87.5° | 0.0     |
| 90°   | 0.0     |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)