

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P434543

Luminaire Tested: **LAMR4B408R709024DE01021MMS**

Issue Date: 11/23/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P434543  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2007-857-14)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 11/23/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LAMR4B408R709024DE01021MMS  
Description: PORTFOLIO 4INCH ADJUSTABLE MULTIPLE, 70 DEG TIR OPTIC  
Light Source: HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2756.6 lumens  
Efficiency: N/A  
Efficacy: 66.9 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.09  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 41.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P434543

CATALOG NUMBER: LAMR4B408R709024DE01021MMS

### Luminous Intensity Polar Plot

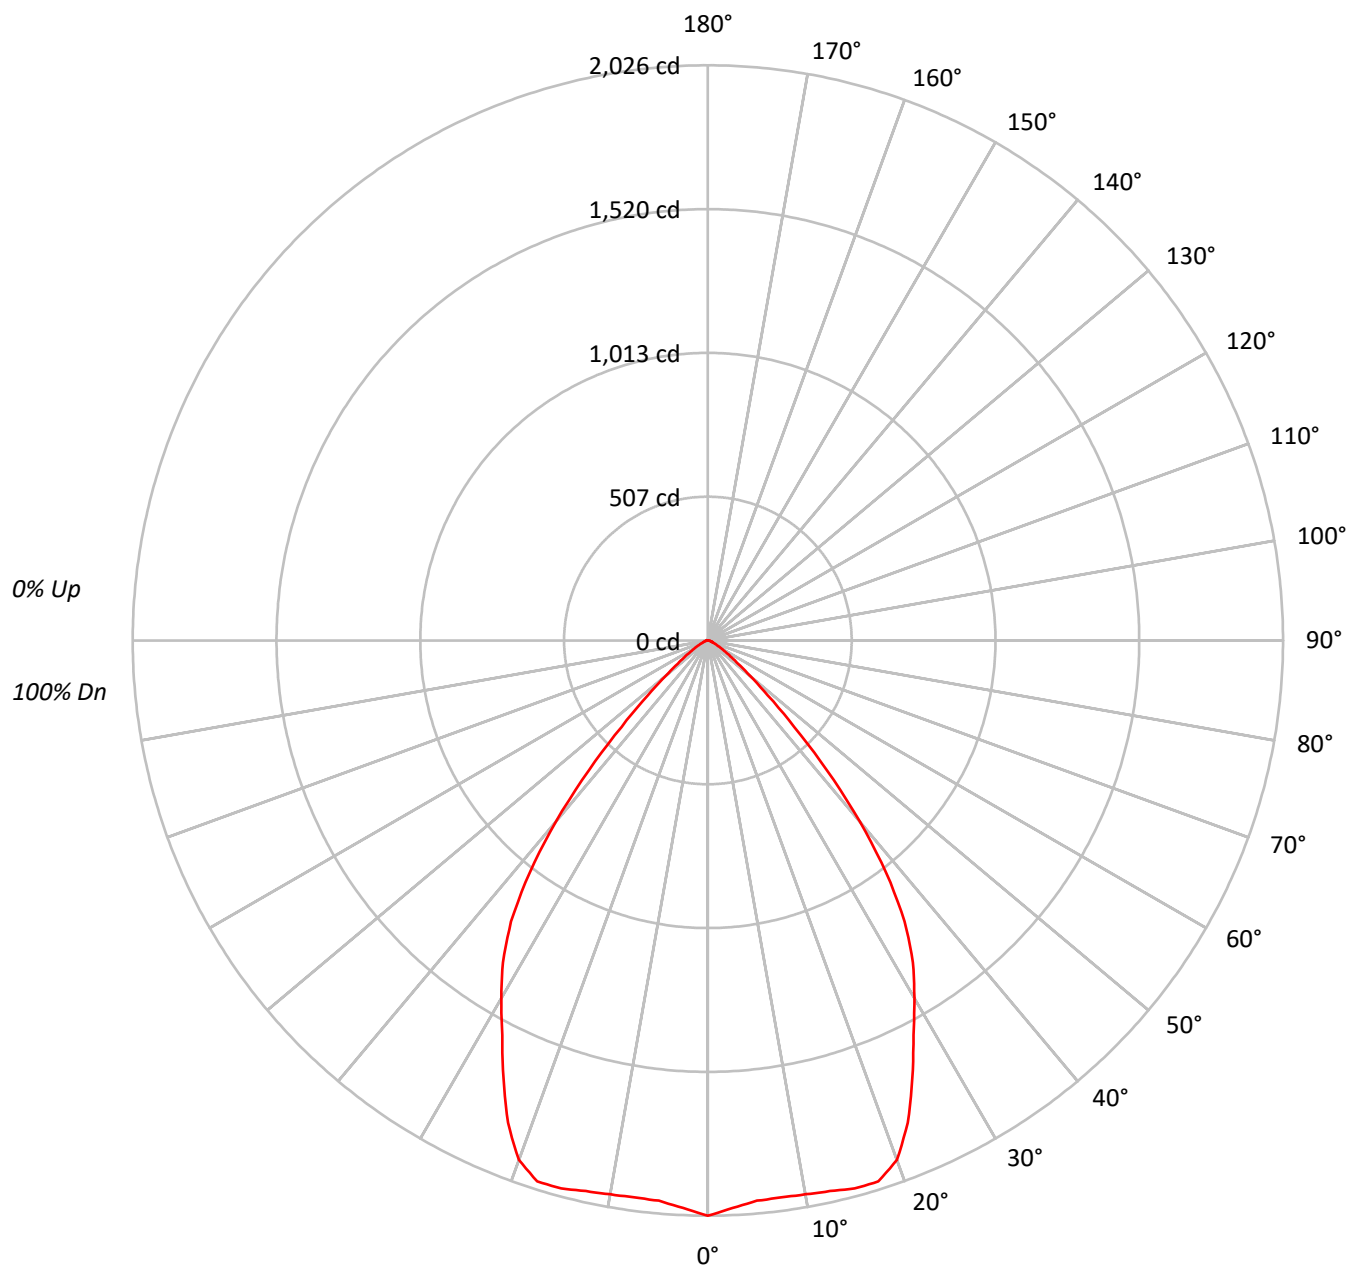



TEST NUMBER: P434543

CATALOG NUMBER: LAMR4B408R709024DE01021MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 113 | 110 | 107 | 104 | 110 | 107 | 105 | 103 | 103 | 101 | 100 |  | 100 | 98  | 97  |  | 96  |
| 2   | 106 | 101 | 96  | 92  | 104 | 99  | 95  | 91  | 96  | 92  | 89  |  | 93  | 90  | 87  |  | 90  |
| 3   | 100 | 93  | 87  | 83  | 98  | 91  | 86  | 82  | 89  | 84  | 81  |  | 86  | 82  | 79  |  | 84  |
| 4   | 94  | 85  | 79  | 74  | 92  | 84  | 78  | 74  | 82  | 77  | 73  |  | 80  | 76  | 72  |  | 78  |
| 5   | 88  | 79  | 72  | 68  | 87  | 78  | 72  | 67  | 76  | 71  | 67  |  | 74  | 70  | 66  |  | 73  |
| 6   | 83  | 73  | 66  | 62  | 82  | 72  | 66  | 61  | 71  | 65  | 61  |  | 69  | 64  | 60  |  | 68  |
| 7   | 78  | 68  | 61  | 56  | 77  | 67  | 61  | 56  | 66  | 60  | 56  |  | 65  | 59  | 56  |  | 63  |
| 8   | 74  | 63  | 57  | 52  | 73  | 63  | 56  | 52  | 62  | 56  | 52  |  | 60  | 55  | 51  |  | 59  |
| 9   | 70  | 59  | 53  | 48  | 69  | 59  | 52  | 48  | 58  | 52  | 48  |  | 57  | 51  | 48  |  | 56  |
| 10  | 66  | 55  | 49  | 45  | 65  | 55  | 49  | 44  | 54  | 48  | 44  |  | 53  | 48  | 44  |  | 52  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |         |
|-----|---------|
|     | 0°      |
| 0°  | 999686  |
| 5°  | 981069  |
| 10° | 992413  |
| 15° | 1020496 |
| 20° | 1022260 |
| 25° | 927413  |
| 30° | 828694  |
| 35° | 727826  |
| 40° | 535859  |
| 45° | 300100  |
| 50° | 147679  |
| 55° | 82749   |
| 60° | 50226   |
| 65° | 33038   |
| 70° | 24523   |
| 75° | 21541   |
| 80° | 16195   |
| 85° | 15851   |



TEST NUMBER: P434543

CATALOG NUMBER: LAMR4B408R709024DE01021MMS

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 189.4  | 6.9       |
| 10°-20°   | 563.0  | 20.4      |
| 20°-30°   | 781.3  | 28.3      |
| 30°-40°   | 735.0  | 26.7      |
| 40°-50°   | 350.9  | 12.7      |
| 50°-60°   | 92.7   | 3.4       |
| 60°-70°   | 29.3   | 1.1       |
| 70°-80°   | 11.9   | 0.4       |
| 80°-90°   | 3.1    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1533.6 | 55.6      |
| 0°-40°    | 2268.6 | 82.3      |
| 0°-60°    | 2712.3 | 98.4      |
| 0°-90°    | 2756.6 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 2756.6 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 2026 |      |
| 5°  | 1981 | 189  |
| 15° | 1998 | 563  |
| 25° | 1704 | 781  |
| 35° | 1208 | 735  |
| 45° | 430  | 351  |
| 55° | 96   | 93   |
| 65° | 28   | 29   |
| 75° | 11   | 12   |
| 85° | 3    | 3    |
| 90° | 0    |      |



TEST NUMBER: P434543

CATALOG NUMBER: LAMR4B408R709024DE01021MMS

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 2026.2 |
| 2.5°  | 2000.7 |
| 5°    | 1980.9 |
| 7.5°  | 1978.1 |
| 10°   | 1980.9 |
| 12.5° | 1986.6 |
| 15°   | 1997.9 |
| 17.5° | 1997.9 |
| 20°   | 1947.0 |
| 22.5° | 1839.4 |
| 25°   | 1703.6 |
| 27.5° | 1567.8 |
| 30°   | 1454.6 |
| 32.5° | 1344.2 |
| 35°   | 1208.4 |
| 37.5° | 1032.9 |
| 40°   | 832.0  |
| 42.5° | 619.8  |
| 45°   | 430.1  |
| 47.5° | 285.8  |
| 50°   | 192.4  |
| 52.5° | 133.0  |
| 55°   | 96.2   |
| 57.5° | 67.9   |
| 60°   | 50.9   |
| 62.5° | 36.8   |
| 65°   | 28.3   |
| 67.5° | 19.8   |
| 70°   | 17.0   |
| 72.5° | 14.1   |
| 75°   | 11.3   |
| 77.5° | 8.5    |
| 80°   | 5.7    |
| 82.5° | 5.7    |
| 85°   | 2.8    |
| 87.5° | 0.0    |
| 90°   | 0.0    |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)