

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P753157

Luminaire Tested: LD4D75BD010-EU4DR4070959027-4LBDP1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P753157
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D75BD010-EU4DR4070959027-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 40° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6474.2 lumens
Efficiency: N/A
Efficacy: 89.4 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P753157

CATALOG NUMBER: LD4D75BD010-EU4DR4070959027-4LBDP1B

Luminous Intensity Polar Plot

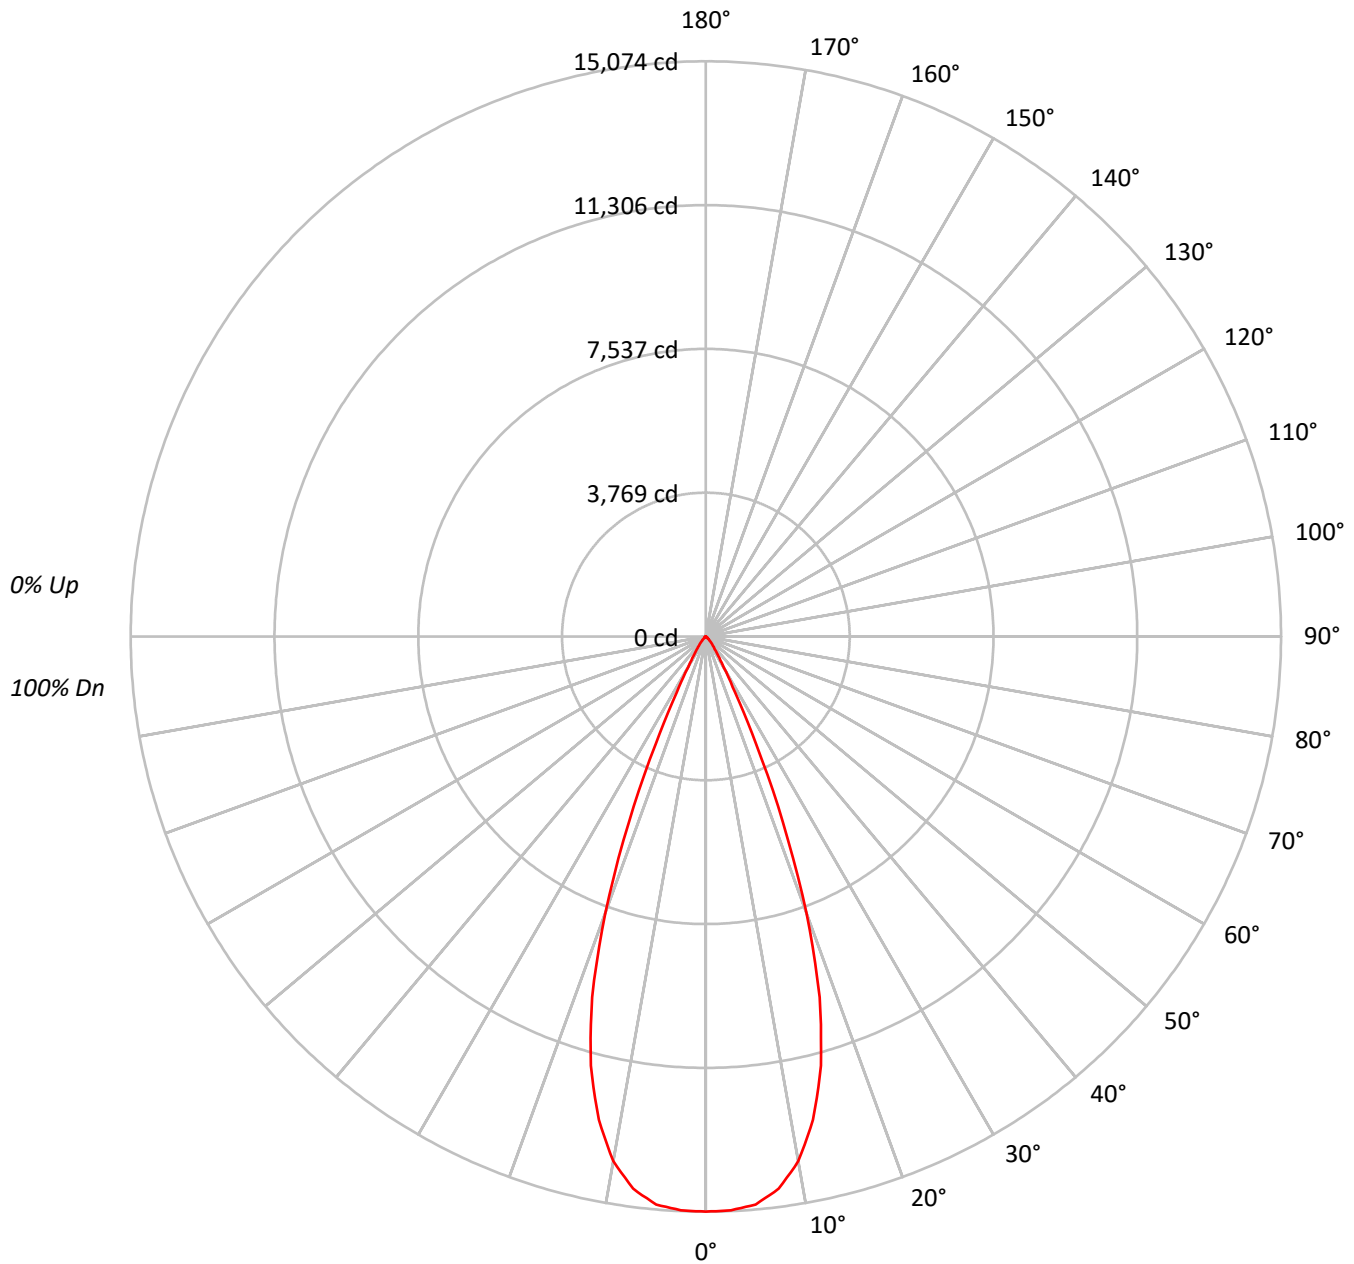

TEST NUMBER: P753157

CATALOG NUMBER: LD4D75BD010-EU4DR4070959027-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	112	110	108	112	110	108	107	106	105	103		103	101	100		99
2	110	106	103	100	108	105	102	99	102	99	97		99	97	95		96
3	106	101	97	94	104	100	96	93	97	94	92		95	93	90		93
4	102	97	92	89	101	95	91	88	93	90	87		92	89	86		90
5	99	92	88	84	97	91	87	84	90	86	83		88	85	83		87
6	95	88	84	80	94	88	83	80	86	82	80		85	82	79		84
7	92	85	80	77	91	84	80	77	83	79	76		82	79	76		81
8	89	82	77	74	88	81	77	74	80	76	73		79	76	73		78
9	86	79	74	71	85	78	74	71	77	73	71		76	73	70		76
10	83	76	71	68	82	75	71	68	75	71	68		74	70	68		73

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1646953
5°	1638953
10°	1549165
15°	1316987
20°	897627
25°	374519
30°	117761
35°	54727
40°	30266
45°	13876
50°	6731
55°	3696
60°	1923
65°	672
70°	288
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 13876 cd/sqm



TEST NUMBER: P753157

CATALOG NUMBER: LD4D75BD010-EU4DR4070959027-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1395.3	21.6
10°-20°	3125.9	48.3
20°-30°	1564.7	24.2
30°-40°	286.8	4.4
40°-50°	79.1	1.2
50°-60°	18.6	0.3
60°-70°	3.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6086.0	94.0
0°-40°	6372.8	98.4
0°-60°	6470.5	99.9
0°-90°	6474.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6474.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	15074	
5°	14943	###
15°	11643	3126
25°	3107	1565
35°	410	287
45°	90	79
55°	19	19
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P753157

CATALOG NUMBER: LD4D75BD010-EU4DR4070959027-4LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	15073.6
2.5°	15051.6
5°	14943.3
7.5°	14598.1
10°	13963.2
12.5°	12973.4
15°	11642.9
17.5°	9912.6
20°	7720.0
22.5°	5263.2
25°	3106.6
27.5°	1642.3
30°	933.4
32.5°	603.2
35°	410.3
37.5°	293.2
40°	212.2
42.5°	145.3
45°	89.8
47.5°	57.2
50°	39.6
52.5°	28.2
55°	19.4
57.5°	12.3
60°	8.8
62.5°	5.3
65°	2.6
67.5°	1.8
70°	0.9
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)