

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211022

Luminaire Tested: **LE_4B10D010 EC4B10208050 4LBS1GPH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211022
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LE_4B10D010 EC4B10208050 4LBS1GPH
Description: PORTFOLIO 4 INCH CYLINDER
SHALLOW DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-10.05W DE010-10.58W D5LT-10.2W DMX-10.6W DL2-11.8W
DL3-11.1W DLE-11.39W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1162.7 lumens
Efficiency: N/A
Efficacy: 117.4 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.26
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211022

CATALOG NUMBER: LE_4B10D010 EC4B10208050 4LBS1GPH

Luminous Intensity Polar Plot

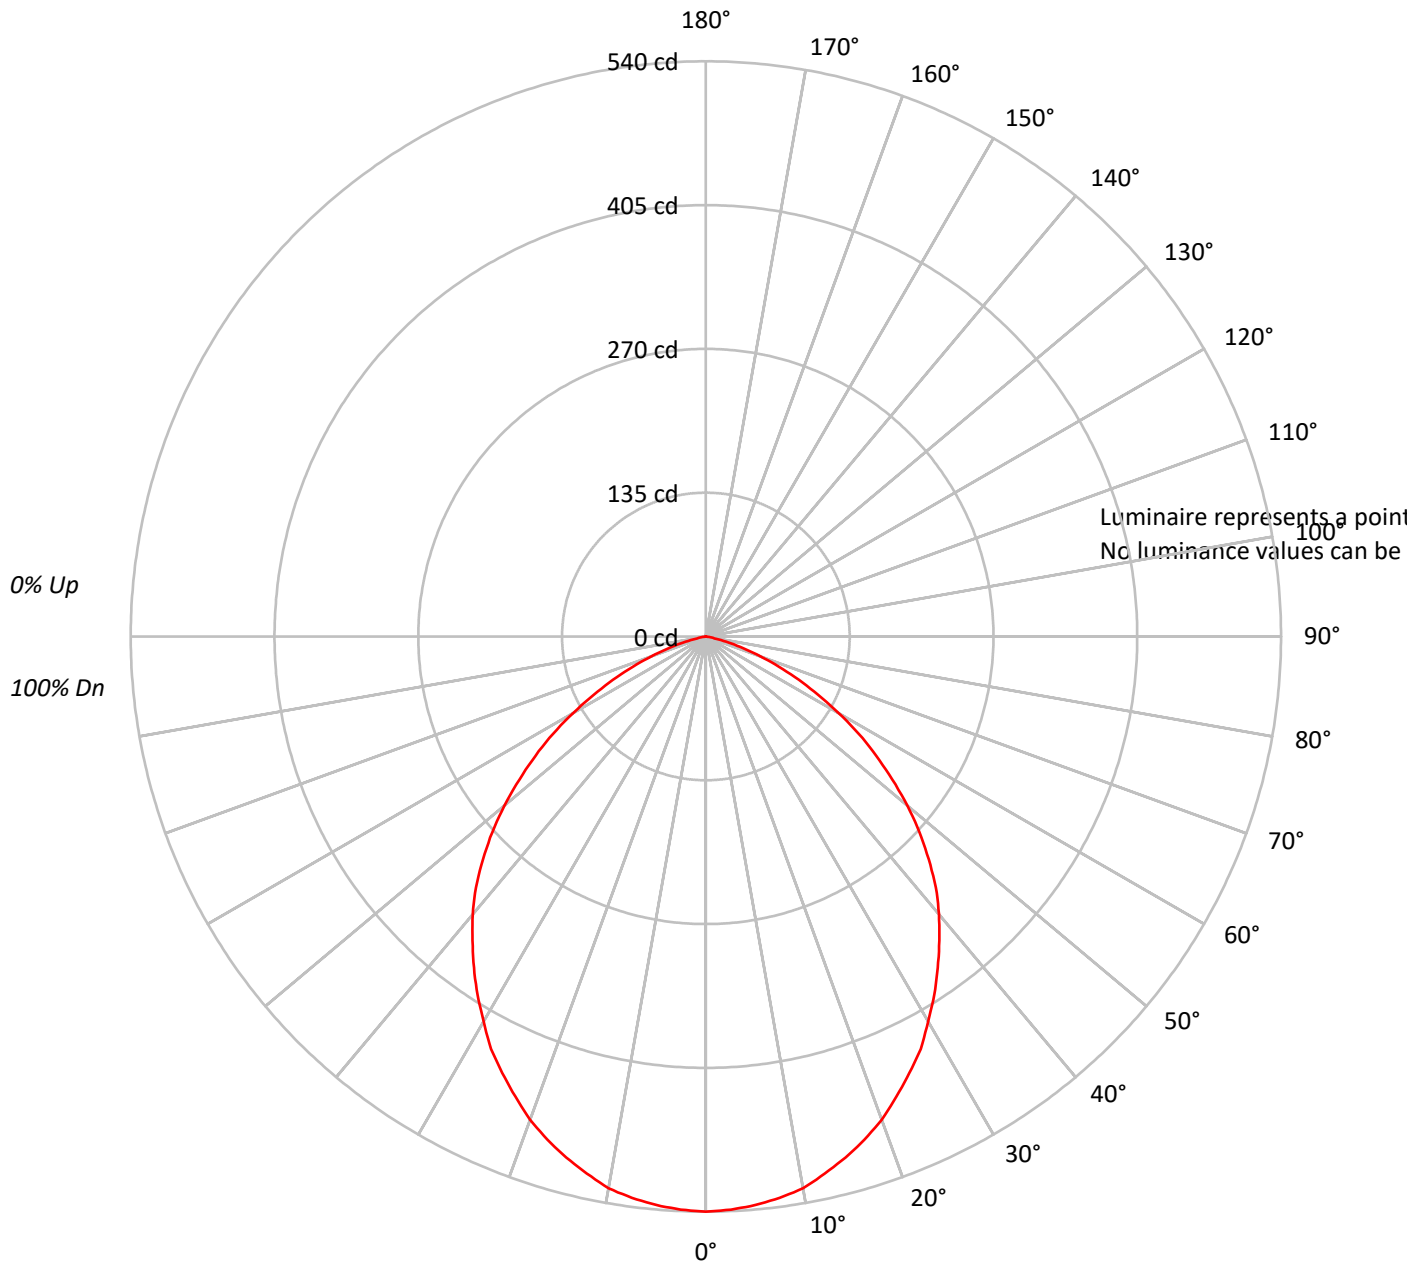




TEST NUMBER: P211022

CATALOG NUMBER: LE_4B10D010 EC4B10208050 4LBS1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	111	107	103	100		108	105	102	99		101	98	96		97	95	93		93	91	90
2	102	95	89	84		100	93	88	83		90	85	82		87	83	80		84	81	78
3	94	85	78	72		92	83	77	71		80	75	70		78	73	69		75	71	68
4	87	76	68	62		85	75	67	62		72	66	61		70	65	60		68	63	59
5	80	68	60	54		78	67	60	54		65	59	53		63	58	53		62	56	52
6	74	62	54	48		73	61	53	48		59	52	47		58	52	47		56	51	47
7	69	57	48	43		68	56	48	43		54	47	42		53	47	42		52	46	42
8	65	52	44	38		63	51	44	38		50	43	38		49	42	38		48	42	38
9	60	48	40	35		59	47	40	35		46	39	35		45	39	34		44	38	34
10	57	44	37	32		56	44	36	32		43	36	31		42	36	31		41	35	31

AVERAGE LUMINANCE (cd/sqm):

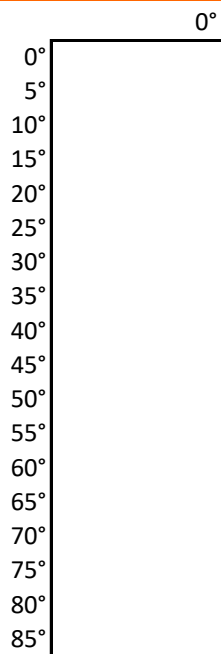



TEST NUMBER: P211022

CATALOG NUMBER: LE_4B10D010 EC4B10208050 4LBS1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	50.8	4.4
10°-20°	142.7	12.3
20°-30°	208.2	17.9
30°-40°	237.4	20.4
40°-50°	227.7	19.6
50°-60°	174.4	15.0
60°-70°	95.7	8.2
70°-80°	25.4	2.2
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	401.7	34.6
0°-40°	639.1	55.0
0°-60°	1041.2	89.5
0°-90°	1162.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1162.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	540	
5°	536	51
15°	506	143
25°	452	208
35°	380	237
45°	296	228
55°	195	174
65°	96	96
75°	22	25
85°	0	0
90°	0	



TEST NUMBER: P211022

CATALOG NUMBER: LE_4B10D010 EC4B10208050 4LBS1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	540.0
2.5°	538.6
5°	535.8
7.5°	531.6
10°	526.1
12.5°	516.3
15°	506.5
17.5°	495.3
20°	482.8
22.5°	467.5
25°	452.1
27.5°	436.7
30°	417.3
32.5°	399.0
35°	379.6
37.5°	359.9
40°	340.5
42.5°	319.6
45°	295.8
47.5°	272.1
50°	247.0
52.5°	220.5
55°	195.3
57.5°	170.2
60°	143.7
62.5°	118.6
65°	96.3
67.5°	74.0
70°	54.4
72.5°	36.3
75°	22.3
77.5°	9.7
80°	2.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)