

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211236

Luminaire Tested: **LE_4B15D010 EC4B10209030 4LBW1WH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211236
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LE_4B15D010 EC4B10209030 4LBW1WH
Description: PORTFOLIO 4 INCH CYLINDER
WIDE DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1285.4 lumens
Efficiency: N/A
Efficacy: 89.9 lumens/watt
Spacing Criteria (0/90/45): 1.26 / 1.26 / 1.16
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211236

CATALOG NUMBER: LE_4B15D010 EC4B10209030 4LBW1WH

Luminous Intensity Polar Plot

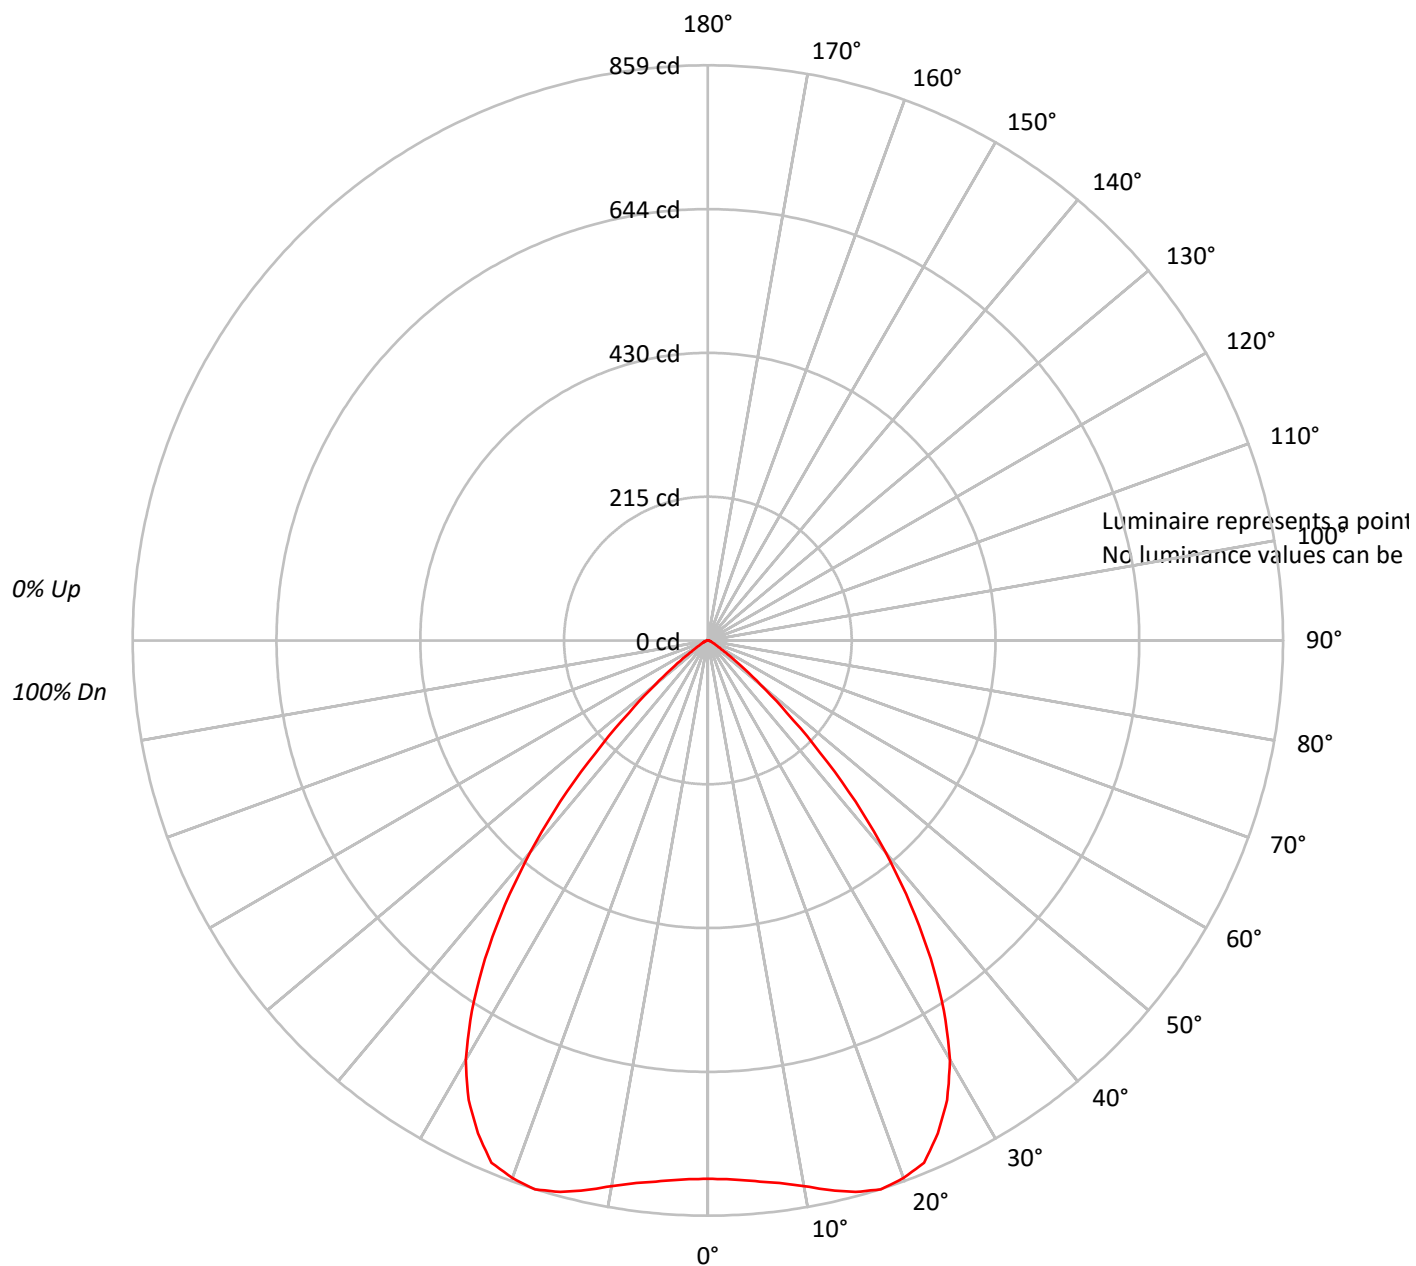



TEST NUMBER: P211236

CATALOG NUMBER: LE_4B15D010 EC4B10209030 4LBW1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	104	110	107	105	103	103	101	100		100	98	97		96
2	106	101	96	92	104	99	95	91	96	92	89		93	90	87		90
3	100	93	87	82	98	91	86	82	88	84	80		86	82	79		84
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	88	79	72	67	86	78	71	67	76	70	66		74	69	65		72
6	83	73	66	61	81	72	65	61	70	64	60		69	64	60		67
7	78	67	60	56	76	67	60	55	65	59	55		64	59	55		63
8	73	62	56	51	72	62	55	51	61	55	51		60	54	50		59
9	69	58	51	47	68	58	51	47	57	51	47		56	50	47		55
10	65	54	48	43	64	54	48	43	53	47	43		52	47	43		51

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211236

CATALOG NUMBER: LE_4B15D010 EC4B10209030 4LBW1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.9	6.1
10°-20°	240.9	18.7
20°-30°	370.6	28.8
30°-40°	357.6	27.8
40°-50°	186.4	14.5
50°-60°	39.2	3.1
60°-70°	9.1	0.7
70°-80°	3.5	0.3
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	689.4	53.6
0°-40°	1047.0	81.5
0°-60°	1272.6	99.0
0°-90°	1285.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1285.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	804	
5°	810	78
15°	853	241
25°	812	371
35°	580	358
45°	237	186
55°	35	39
65°	8	9
75°	3	3
85°	0	0
90°	0	



TEST NUMBER: P211236

CATALOG NUMBER: LE_4B15D010 EC4B10209030 4LBW1WH

CANDELA DISTRIBUTION (FULL):

	0°
0°	803.8
2.5°	805.5
5°	810.5
7.5°	817.2
10°	827.3
12.5°	840.8
15°	852.6
17.5°	859.3
20°	854.2
22.5°	844.1
25°	812.2
27.5°	773.6
30°	723.1
32.5°	655.9
35°	580.1
37.5°	497.8
40°	412.0
42.5°	326.2
45°	237.1
47.5°	159.7
50°	102.5
52.5°	62.2
55°	35.3
57.5°	21.8
60°	15.1
62.5°	11.7
65°	8.4
67.5°	6.7
70°	5.0
72.5°	5.0
75°	3.4
77.5°	1.6
80°	1.6
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)