

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761259

Luminaire Tested: LD6D15D010-EU6DR350215IC9027-6LBDP1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P761259
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D15D010-EU6DR350215IC9027-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 35° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1118.2 lumens
Efficiency: N/A
Efficacy: 70.8 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P761259

CATALOG NUMBER: LD6D15D010-EU6DR350215IC9027-6LBDP1B

Luminous Intensity Polar Plot

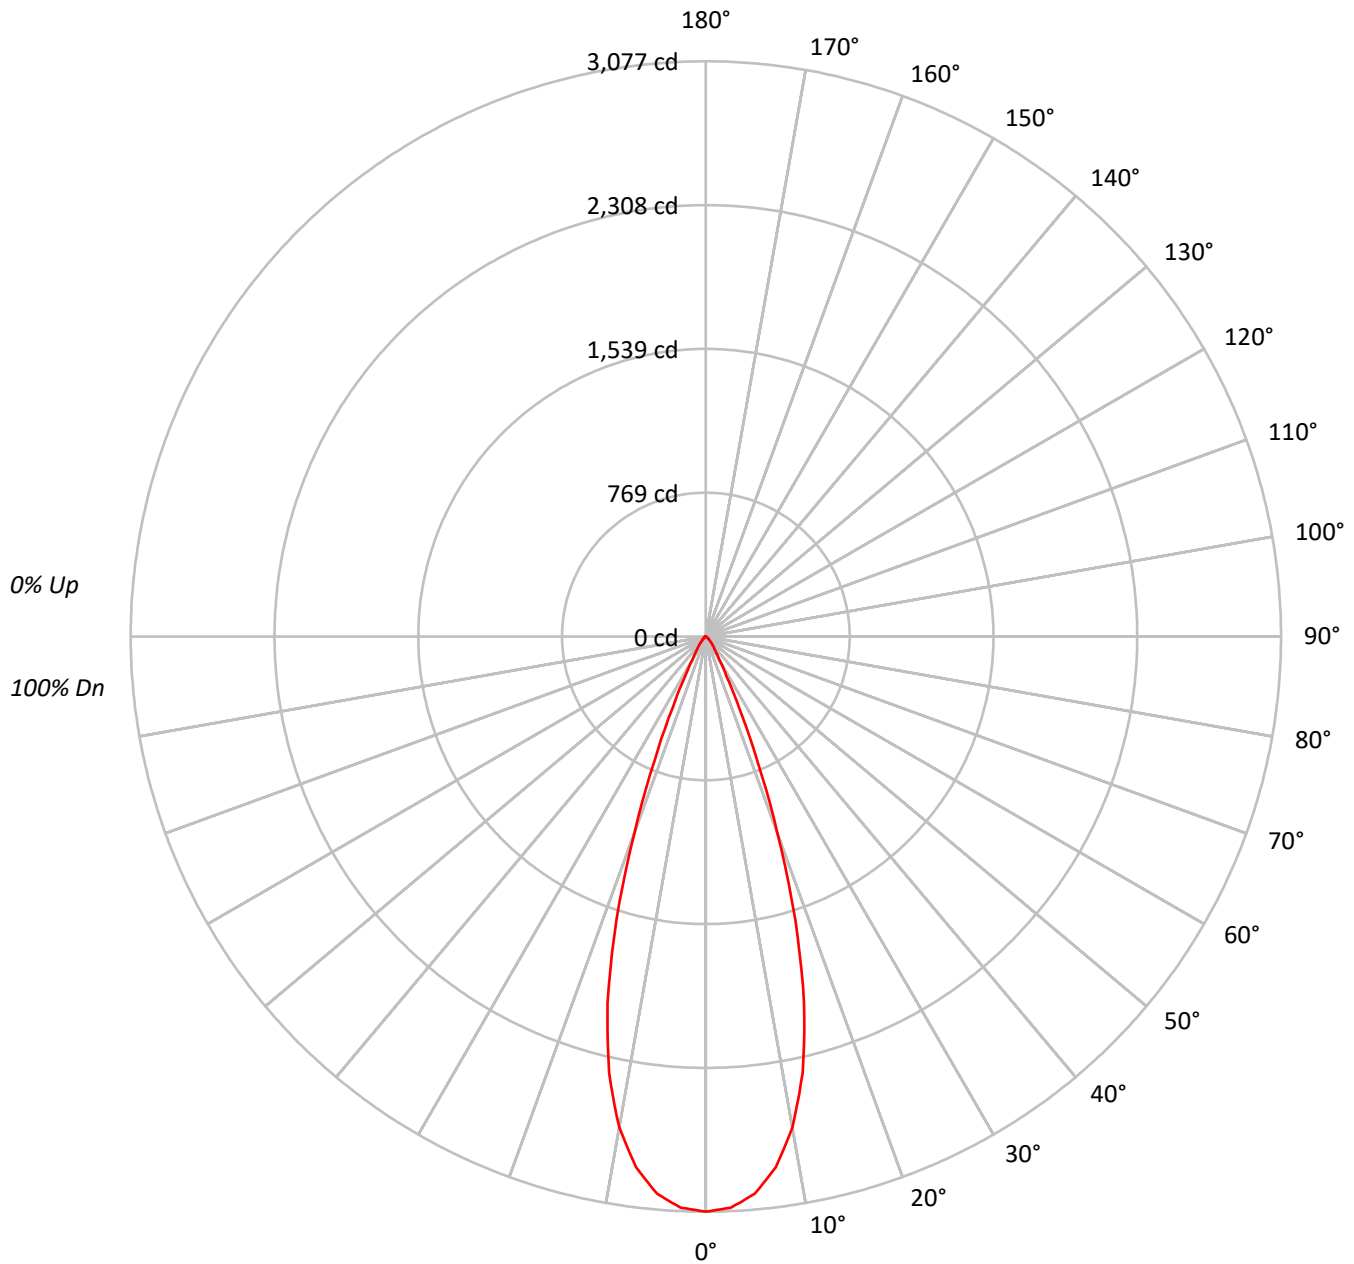

TEST NUMBER: P761259

CATALOG NUMBER: LD6D15D010-EU6DR350215IC9027-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	112	110	108	112	110	108	107	106	105	103		103	101	100		99
2	110	106	103	101	108	105	102	99	102	99	97		99	97	95		96
3	106	101	97	94	105	100	96	93	97	95	92		95	93	91		93
4	103	97	92	89	101	96	92	89	94	90	88		92	89	87		90
5	99	93	88	85	98	92	87	84	90	86	84		89	85	83		87
6	96	89	84	81	94	88	84	81	87	83	80		85	82	80		84
7	93	85	81	78	91	85	80	77	84	80	77		83	79	77		82
8	90	82	78	74	88	82	77	74	81	77	74		80	76	74		79
9	87	79	75	72	86	79	75	72	78	74	71		77	74	71		77
10	84	77	72	69	83	76	72	69	76	72	69		75	71	69		74

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	336173
5°	328278
10°	295860
15°	229635
20°	130249
25°	50670
30°	18899
35°	10364
40°	6775
45°	4126
50°	2618
55°	1848
60°	1355
65°	750
70°	64
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4126 cd/sqm



TEST NUMBER: P761259

CATALOG NUMBER: LD6D15D010-EU6DR350215IC9027-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	275.3	24.6
10°-20°	537.5	48.1
20°-30°	219.2	19.6
30°-40°	52.4	4.7
40°-50°	21.9	2.0
50°-60°	9.1	0.8
60°-70°	2.8	0.3
70°-80°	0.1	0.0
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1031.9	92.3
0°-40°	1084.4	97.0
0°-60°	1115.3	99.7
0°-90°	1118.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1118.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3077	
5°	2993	275
15°	2030	537
25°	420	219
35°	78	52
45°	27	22
55°	10	9
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P761259

CATALOG NUMBER: LD6D15D010-EU6DR350215IC9027-6LBDP1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	3076.8
2.5°	3058.4
5°	2993.1
7.5°	2862.9
10°	2666.7
12.5°	2390.5
15°	2030.1
17.5°	1589.3
20°	1120.2
22.5°	714.3
25°	420.3
27.5°	237.6
30°	149.8
32.5°	105.2
35°	77.7
37.5°	60.0
40°	47.5
42.5°	36.6
45°	26.7
47.5°	19.9
50°	15.4
52.5°	12.3
55°	9.7
57.5°	7.9
60°	6.2
62.5°	4.5
65°	2.9
67.5°	1.0
70°	0.2
72.5°	0.2
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.2
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)