

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761050

Luminaire Tested: LD6D15D010-EU6DR2015309030-6LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P761050
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D15D010-EU6DR2015309030-6LBS1LI
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1635.7 lumens
Efficiency: N/A
Efficacy: 103.5 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P761050

CATALOG NUMBER: LD6D15D010-EU6DR2015309030-6LBS1LI

Luminous Intensity Polar Plot

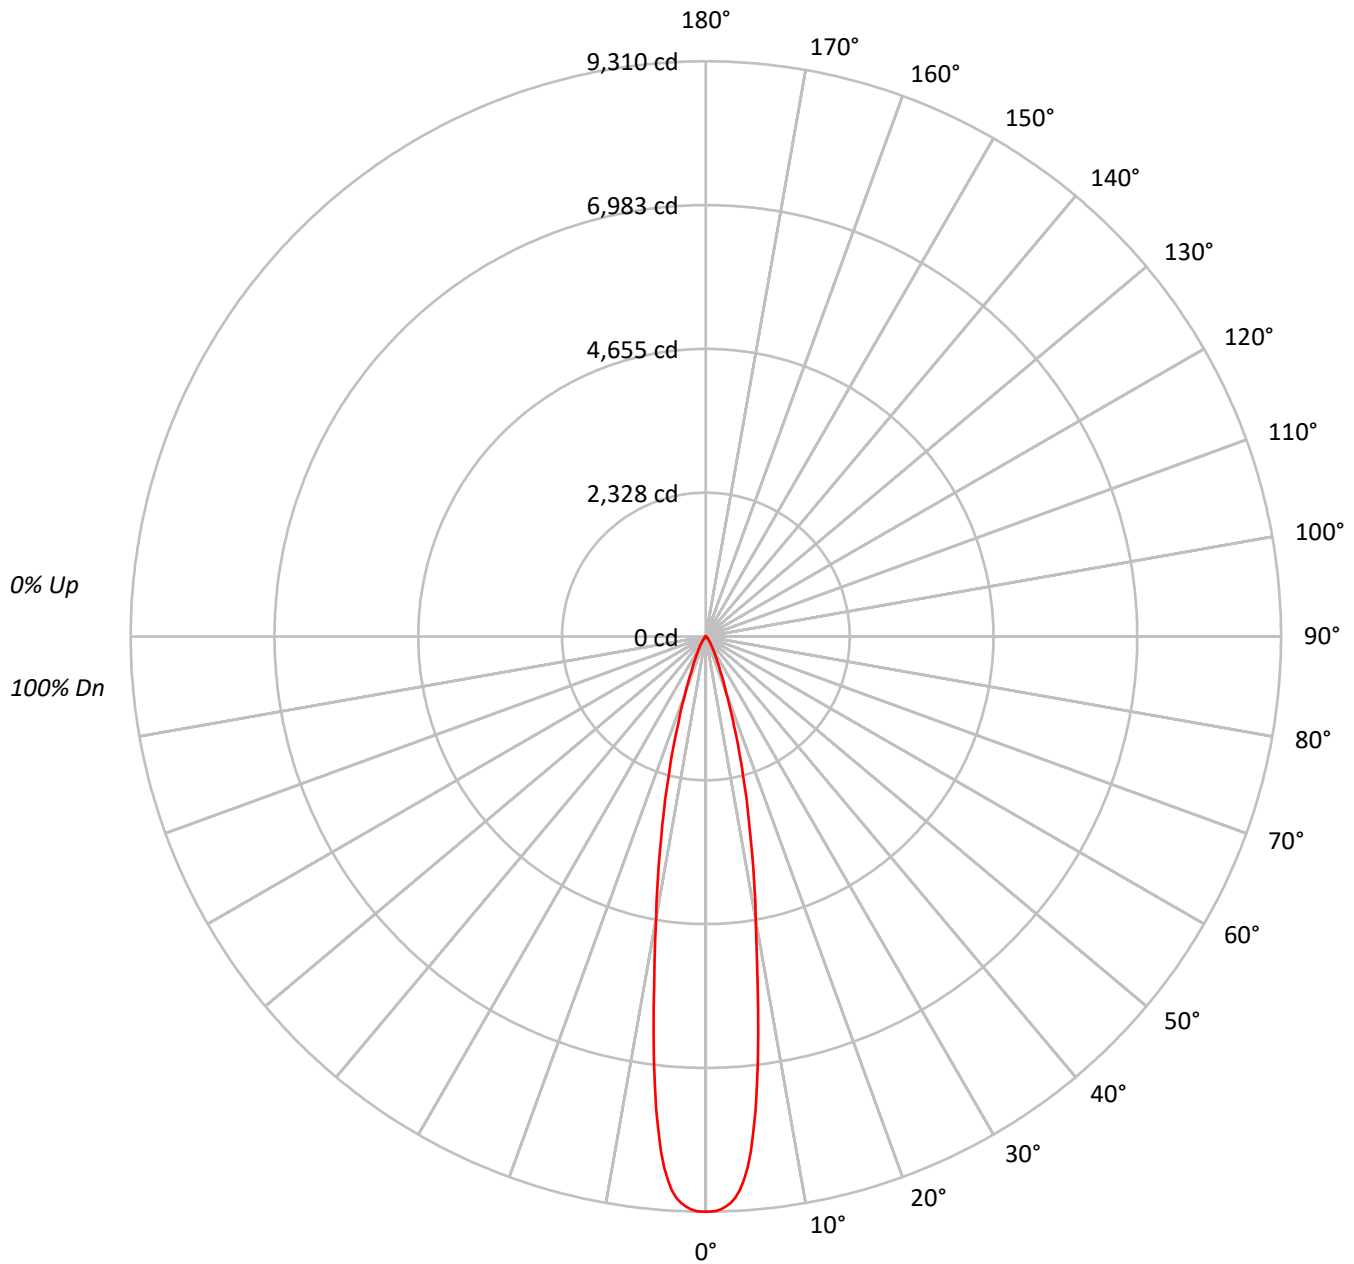



TEST NUMBER: P761050

CATALOG NUMBER: LD6D15D010-EU6DR2015309030-6LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	115	113	111	109		113	111	109	108		107	106	104		103	102	101		100	99	98
2	111	108	105	102		109	106	104	101		103	101	99		100	99	97		98	96	95
3	108	103	100	97		106	102	99	96		100	97	95		97	95	93		95	93	92
4	105	99	96	93		103	98	95	92		96	93	91		95	92	90		93	91	89
5	102	96	92	89		100	95	91	89		94	90	88		92	89	87		91	88	86
6	99	93	89	86		98	92	88	86		91	87	85		90	87	84		88	86	84
7	96	90	86	83		95	89	86	83		88	85	82		87	84	82		86	84	82
8	94	87	83	81		93	87	83	80		86	83	80		85	82	80		84	82	80
9	91	85	81	78		91	85	81	78		84	80	78		83	80	78		82	80	78
10	89	83	79	76		88	82	79	76		82	78	76		81	78	76		81	78	76

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1017218
5°	917721
10°	515079
15°	261827
20°	110855
25°	51176
30°	27087
35°	14592
40°	7802
45°	4605
50°	2686
55°	1429
60°	896
65°	646
70°	256
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4605 cd/sqm



TEST NUMBER: P761050

CATALOG NUMBER: LD6D15D010-EU6DR2015309030-6LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	662.9	40.5
10°-20°	652.7	39.9
20°-30°	213.2	13.0
30°-40°	72.6	4.4
40°-50°	24.4	1.5
50°-60°	7.3	0.4
60°-70°	2.4	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1528.8	93.5
0°-40°	1601.4	97.9
0°-60°	1633.1	99.8
0°-90°	1635.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1635.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9310	
5°	8367	663
15°	2315	653
25°	424	213
35°	109	73
45°	30	24
55°	8	7
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P761050

CATALOG NUMBER: LD6D15D010-EU6DR2015309030-6LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	9310.0
0.5°	9310.0
1°	9298.4
1.5°	9275.2
2°	9232.9
2.5°	9176.5
3°	9096.9
3.5°	8985.9
4°	8820.9
4.5°	8620.3
5°	8367.4
5.5°	8035.0
6°	7694.2
6.5°	7303.8
7°	6921.6
7.5°	6473.9
8°	6074.3
8.5°	5672.2
9°	5300.8
9.5°	4960.1
10°	4642.6
12.5°	3333.5
15°	2314.7
17.5°	1512.2
20°	953.4
22.5°	617.6
25°	424.5
27.5°	298.5
30°	214.7
32.5°	154.2
35°	109.4
37.5°	76.3
40°	54.7
42.5°	39.8
45°	29.8
47.5°	23.2
50°	15.8
52.5°	9.9
55°	7.5
57.5°	5.8
60°	4.1
62.5°	3.3
65°	2.5



TEST NUMBER: P761050

CATALOG NUMBER: LD6D15D010-EU6DR2015309030-6LBS1LI

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







67.5°	1.7
70°	0.8



(END OF REPORT)