

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761275

Luminaire Tested: LD6D15D010-EU6DR350215IC9030-6LBDP1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P761275
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D15D010-EU6DR350215IC9030-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 35° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1250.9 lumens
Efficiency: N/A
Efficacy: 79.2 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P761275

CATALOG NUMBER: LD6D15D010-EU6DR350215IC9030-6LBDP1MW

Luminous Intensity Polar Plot

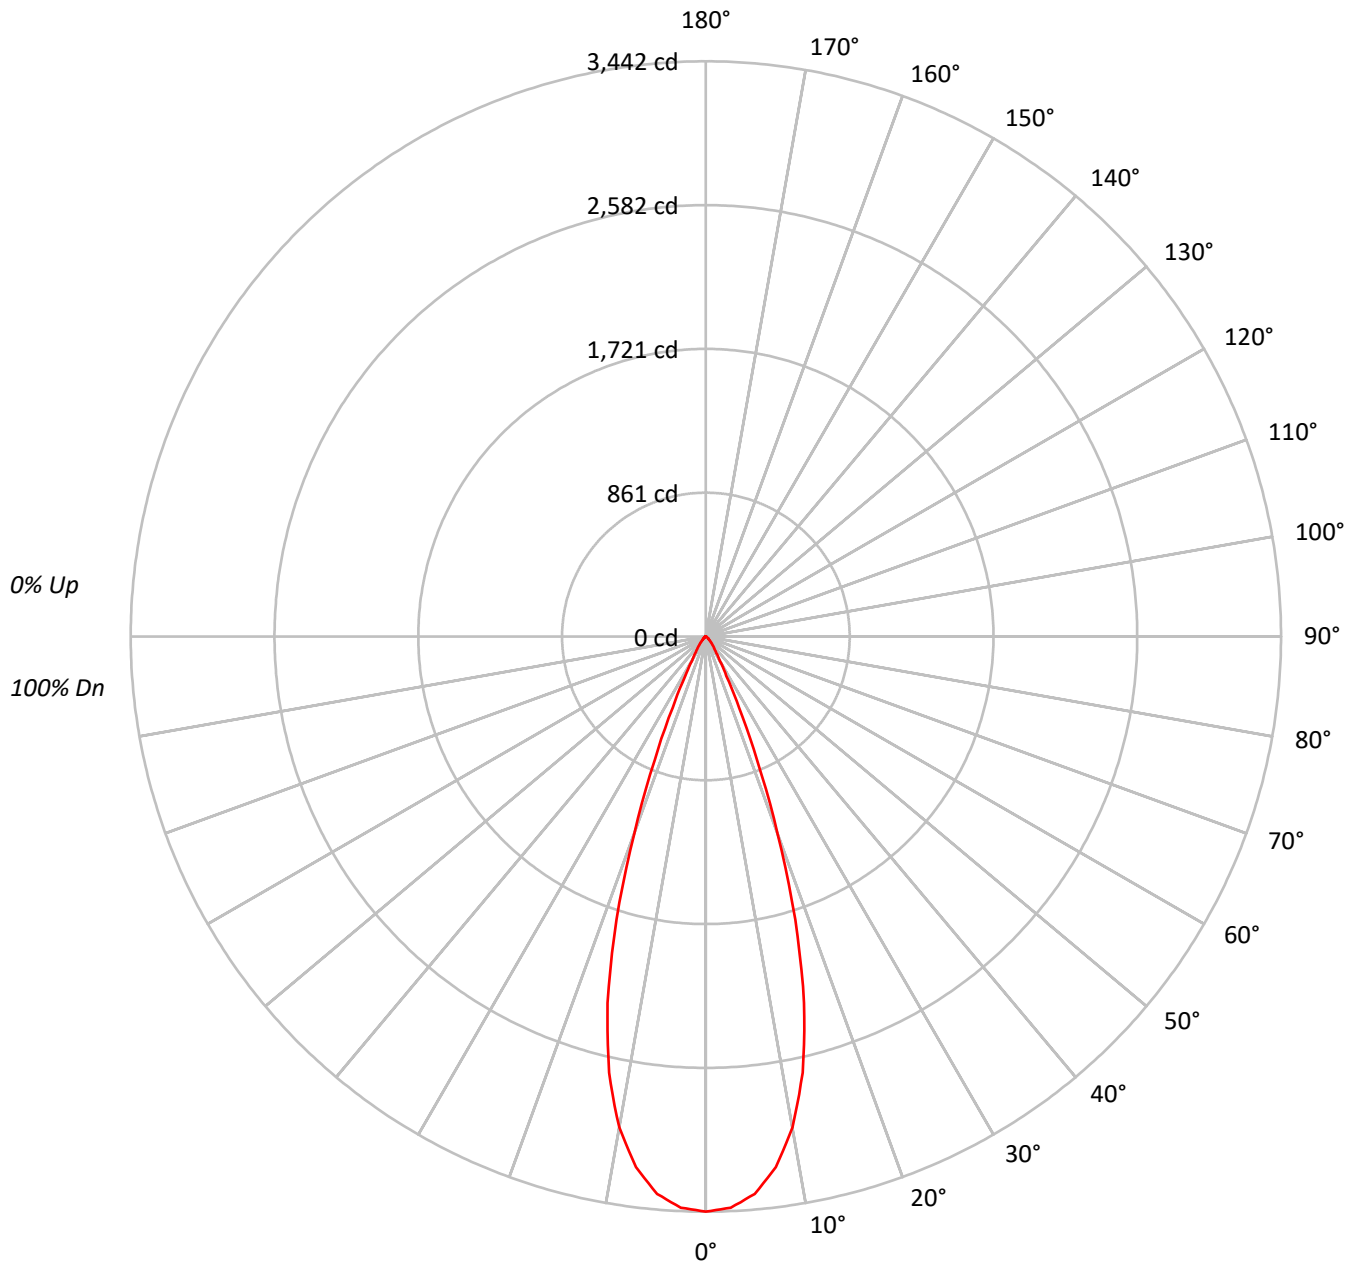

CATALOG NUMBER: LD6D15D010-EU6DR350215IC9030-6LBDP1MW

RF	20				20				20				20				20							
RC	80				70				50				30				10				0			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																								
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96						
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92						
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88						
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84						
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81						
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78						
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75						
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72						
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70						
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68						

	0°
0°	376054
5°	367224
10°	330964
15°	256873
20°	145702
25°	56685
30°	21145
35°	11591
40°	7574
45°	4620
50°	2924
55°	2076
60°	1508
65°	827
70°	64
75°	0
80°	0
85°	0

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 4620 cd/sqm



TEST NUMBER: P761275

CATALOG NUMBER: LD6D15D010-EU6DR350215IC9030-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	307.9	24.6
10°-20°	601.2	48.1
20°-30°	245.2	19.6
30°-40°	58.7	4.7
40°-50°	24.4	2.0
50°-60°	10.1	0.8
60°-70°	3.1	0.3
70°-80°	0.1	0.0
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1154.3	92.3
0°-40°	1213.0	97.0
0°-60°	1247.6	99.7
0°-90°	1250.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1250.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3442	
5°	3348	308
15°	2271	601
25°	470	245
35°	87	59
45°	30	24
55°	11	10
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P761275

CATALOG NUMBER: LD6D15D010-EU6DR350215IC9030-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	3441.8
2.5°	3421.1
5°	3348.2
7.5°	3202.5
10°	2983.1
12.5°	2674.1
15°	2270.9
17.5°	1777.9
20°	1253.1
22.5°	799.0
25°	470.2
27.5°	265.8
30°	167.6
32.5°	117.7
35°	86.9
37.5°	67.2
40°	53.1
42.5°	40.9
45°	29.9
47.5°	22.3
50°	17.2
52.5°	13.7
55°	10.9
57.5°	8.8
60°	6.9
62.5°	5.0
65°	3.2
67.5°	1.1
70°	0.2
72.5°	0.2
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.2
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)