

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761506

Luminaire Tested: LD6D15D010-EU6DR500215IC9030-6LBS1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P761506  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D15D010-EU6DR500215IC9030-6LBS1LI  
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 50° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1601.2 lumens  
Efficiency: N/A  
Efficacy: 101.3 lumens/watt  
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 15.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P761506

CATALOG NUMBER: LD6D15D010-EU6DR500215IC9030-6LBS1LI

### Luminous Intensity Polar Plot

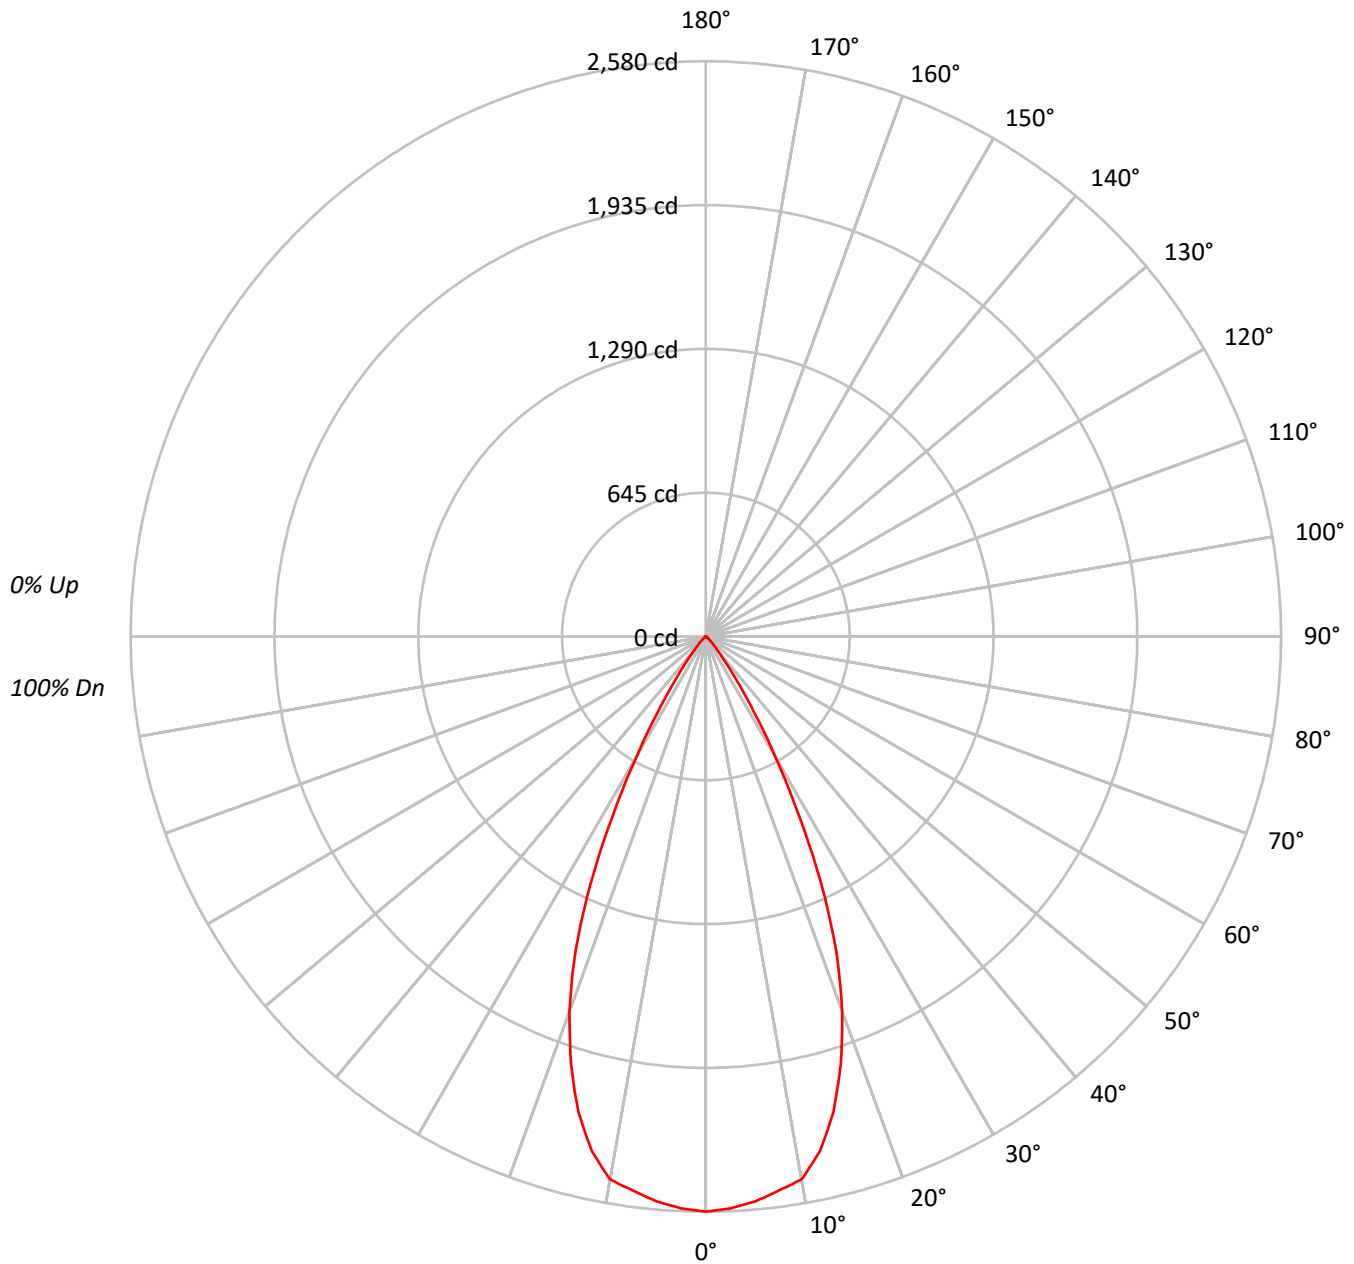



TEST NUMBER: P761506

CATALOG NUMBER: LD6D15D010-EU6DR500215IC9030-6LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     |     | 50  |     |     |     |     | 30  |     |     |     |     | 0   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 102 | 102 | 100 |
| 1   | 114 | 112 | 109 | 107 | 112 | 110 | 108 | 106 | 106 | 104 | 102 | 102 | 101 | 99  | 98  | 97  | 97  | 97  | 97  | 95  |
| 2   | 109 | 105 | 101 | 98  | 107 | 103 | 100 | 97  | 100 | 98  | 95  | 97  | 95  | 93  | 95  | 93  | 91  | 91  | 91  | 90  |
| 3   | 105 | 99  | 95  | 91  | 103 | 98  | 94  | 90  | 95  | 92  | 89  | 93  | 90  | 88  | 91  | 88  | 86  | 86  | 86  | 85  |
| 4   | 100 | 94  | 89  | 85  | 99  | 93  | 88  | 85  | 90  | 87  | 84  | 89  | 85  | 83  | 87  | 84  | 82  | 82  | 82  | 80  |
| 5   | 96  | 89  | 84  | 80  | 95  | 88  | 83  | 79  | 86  | 82  | 79  | 85  | 81  | 78  | 83  | 80  | 77  | 77  | 77  | 76  |
| 6   | 92  | 84  | 79  | 75  | 91  | 83  | 79  | 75  | 82  | 78  | 74  | 81  | 77  | 74  | 79  | 76  | 74  | 74  | 74  | 72  |
| 7   | 88  | 80  | 75  | 71  | 87  | 79  | 74  | 71  | 78  | 74  | 71  | 77  | 73  | 70  | 76  | 73  | 70  | 70  | 70  | 69  |
| 8   | 85  | 76  | 71  | 67  | 84  | 76  | 71  | 67  | 75  | 70  | 67  | 74  | 70  | 67  | 73  | 69  | 66  | 66  | 66  | 65  |
| 9   | 81  | 73  | 68  | 64  | 80  | 72  | 67  | 64  | 71  | 67  | 64  | 71  | 67  | 64  | 70  | 66  | 63  | 63  | 63  | 62  |
| 10  | 78  | 70  | 64  | 61  | 77  | 69  | 64  | 61  | 68  | 64  | 61  | 68  | 64  | 61  | 67  | 63  | 60  | 60  | 60  | 59  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 281893 |
| 5°  | 278944 |
| 10° | 274348 |
| 15° | 249815 |
| 20° | 207873 |
| 25° | 147560 |
| 30° | 78108  |
| 35° | 31825  |
| 40° | 11810  |
| 45° | 5408   |
| 50° | 2227   |
| 55° | 1162   |
| 60° | 568    |
| 65° | 155    |
| 70° | 0      |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 5408 cd/sqm



TEST NUMBER: P761506

CATALOG NUMBER: LD6D15D010-EU6DR500215IC9030-6LBS1LI

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 240.4  | 15.0      |
| 10°-20°   | 607.5  | 37.9      |
| 20°-30°   | 545.7  | 34.1      |
| 30°-40°   | 170.9  | 10.7      |
| 40°-50°   | 29.9   | 1.9       |
| 50°-60°   | 6.0    | 0.4       |
| 60°-70°   | 0.9    | 0.1       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 1393.6 | 87.0      |
| 0°-40°    | 1564.5 | 97.7      |
| 0°-60°    | 1600.3 | 99.9      |
| 0°-90°    | 1601.2 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1601.2 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 2580 |      |
| 5°  | 2543 | 240  |
| 15° | 2208 | 608  |
| 25° | 1224 | 546  |
| 35° | 239  | 171  |
| 45° | 35   | 30   |
| 55° | 6    | 6    |
| 65° | 1    | 1    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P761506

CATALOG NUMBER: LD6D15D010-EU6DR500215IC9030-6LBS1LI

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 2580.0 |
| 2.5°  | 2567.2 |
| 5°    | 2543.3 |
| 7.5°  | 2506.7 |
| 10°   | 2472.8 |
| 12.5° | 2364.0 |
| 15°   | 2208.5 |
| 17.5° | 2011.0 |
| 20°   | 1787.8 |
| 22.5° | 1529.6 |
| 25°   | 1224.0 |
| 27.5° | 899.9  |
| 30°   | 619.1  |
| 32.5° | 403.1  |
| 35°   | 238.6  |
| 37.5° | 137.0  |
| 40°   | 82.8   |
| 42.5° | 54.0   |
| 45°   | 35.0   |
| 47.5° | 21.3   |
| 50°   | 13.1   |
| 52.5° | 8.9    |
| 55°   | 6.1    |
| 57.5° | 4.1    |
| 60°   | 2.6    |
| 62.5° | 1.5    |
| 65°   | 0.6    |
| 67.5° | 0.2    |
| 70°   | 0.0    |
| 72.5° | 0.0    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)