

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761800

Luminaire Tested: LD6D15D010-EU6DR700215IC9030-6LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P761800
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D15D010-EU6DR700215IC9030-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 820.1 lumens
Efficiency: N/A
Efficacy: 51.9 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P761800

CATALOG NUMBER: LD6D15D010-EU6DR700215IC9030-6LBDP1B

Luminous Intensity Polar Plot

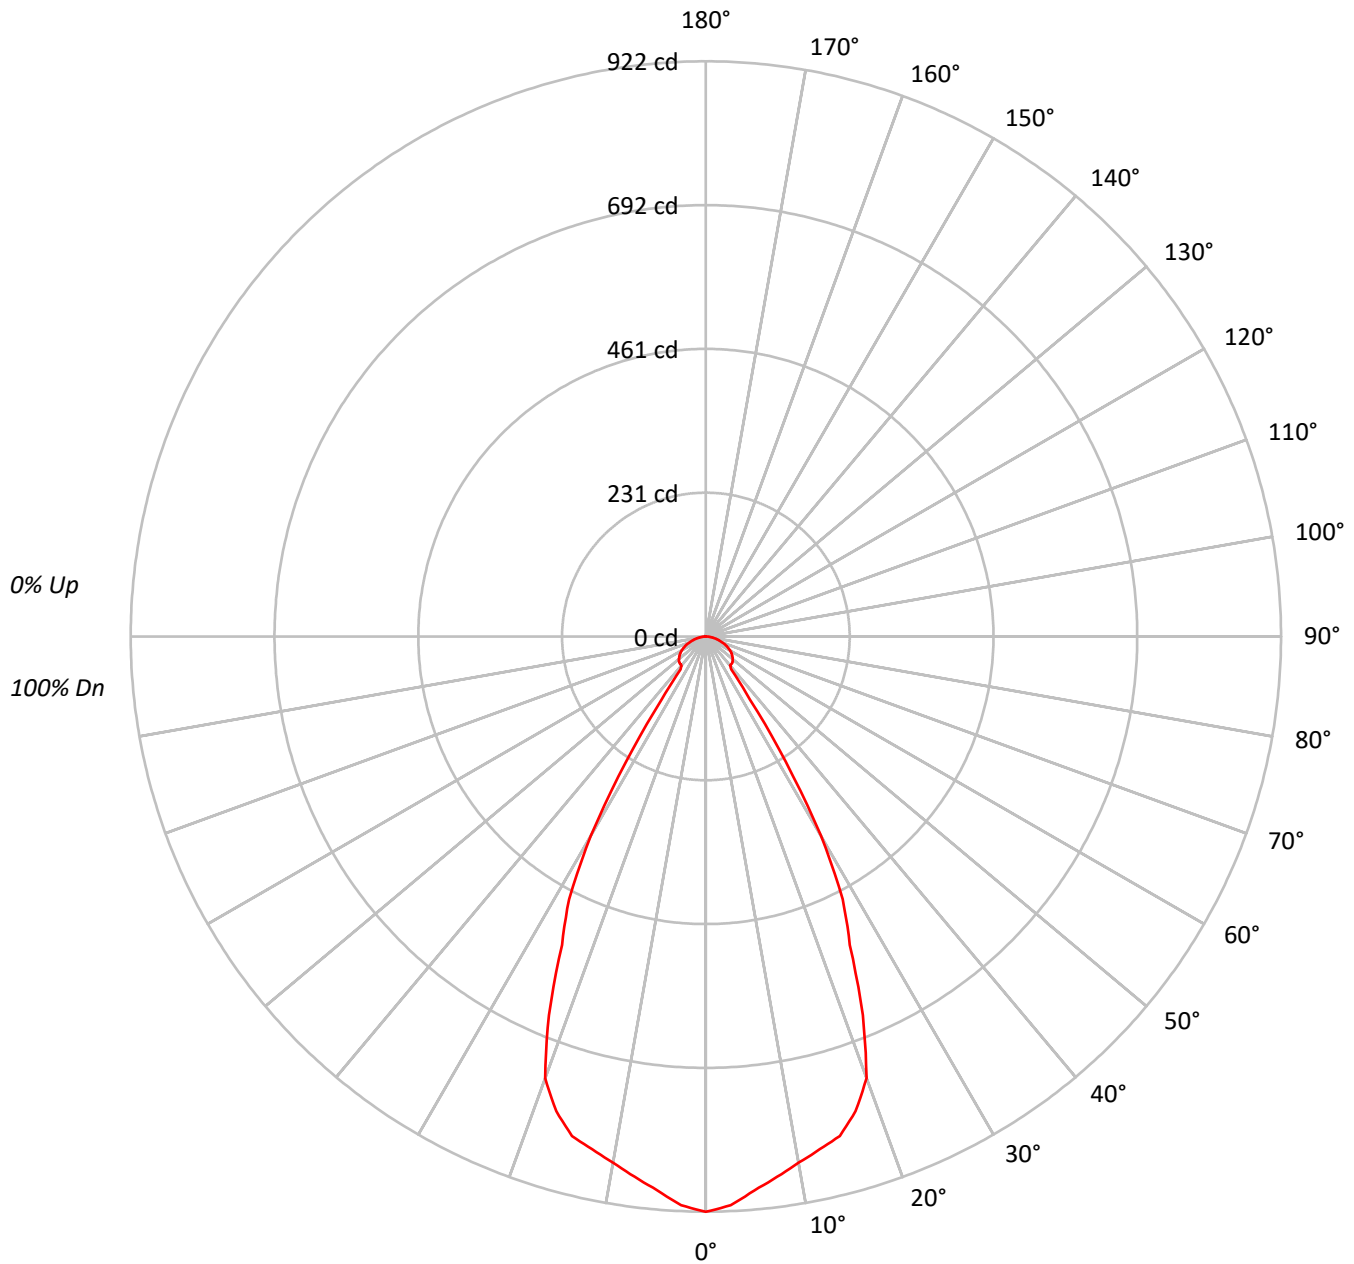



TEST NUMBER: P761800

CATALOG NUMBER: LD6D15D010-EU6DR700215IC9030-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91		
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83		
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76		
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70		
5	89	80	74	69	88	79	73	69	77	72	68	75	71	67	74	70	67	65		
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61		
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57		
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53		
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50		
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	100760
5°	97756
10°	95037
15°	93784
20°	87577
25°	65787
30°	46504
35°	16473
40°	8658
45°	9225
50°	9553
55°	9734
60°	9790
65°	9592
70°	9041
75°	8401
80°	7425
85°	6017

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 57.5°

Luminance: 9802 cd/sqm



TEST NUMBER: P761800

CATALOG NUMBER: LD6D15D010-EU6DR700215IC9030-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	84.1	10.3
10°-20°	230.6	28.1
20°-30°	254.0	31.0
30°-40°	97.0	11.8
40°-50°	45.8	5.6
50°-60°	45.5	5.6
60°-70°	36.5	4.4
70°-80°	20.9	2.6
80°-90°	5.7	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	568.7	69.3
0°-40°	665.7	81.2
0°-60°	757.0	92.3
0°-90°	820.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	820.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	922	
5°	891	84
15°	829	231
25°	546	254
35°	124	97
45°	60	46
55°	51	46
65°	37	36
75°	20	21
85°	5	6
90°	0	



TEST NUMBER: P761800

CATALOG NUMBER: LD6D15D010-EU6DR700215IC9030-6LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	922.2
2.5°	912.5
5°	891.3
7.5°	873.7
10°	856.6
12.5°	842.1
15°	829.1
17.5°	797.8
20°	753.2
22.5°	657.2
25°	545.7
27.5°	475.1
30°	368.6
32.5°	238.1
35°	123.5
37.5°	66.7
40°	60.7
42.5°	60.3
45°	59.7
47.5°	58.4
50°	56.2
52.5°	53.7
55°	51.1
57.5°	48.2
60°	44.8
62.5°	41.0
65°	37.1
67.5°	32.7
70°	28.3
72.5°	23.9
75°	19.9
77.5°	15.6
80°	11.8
82.5°	8.3
85°	4.8
87.5°	1.9
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)