

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P760980

Luminaire Tested: LD6D15D010-EU6DR1515309035-6LBDP1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P760980
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D15D010-EU6DR1515309035-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 15° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1391.4 lumens
Efficiency: N/A
Efficacy: 88.1 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P760980

CATALOG NUMBER: LD6D15D010-EU6DR1515309035-6LBDP1B

Luminous Intensity Polar Plot

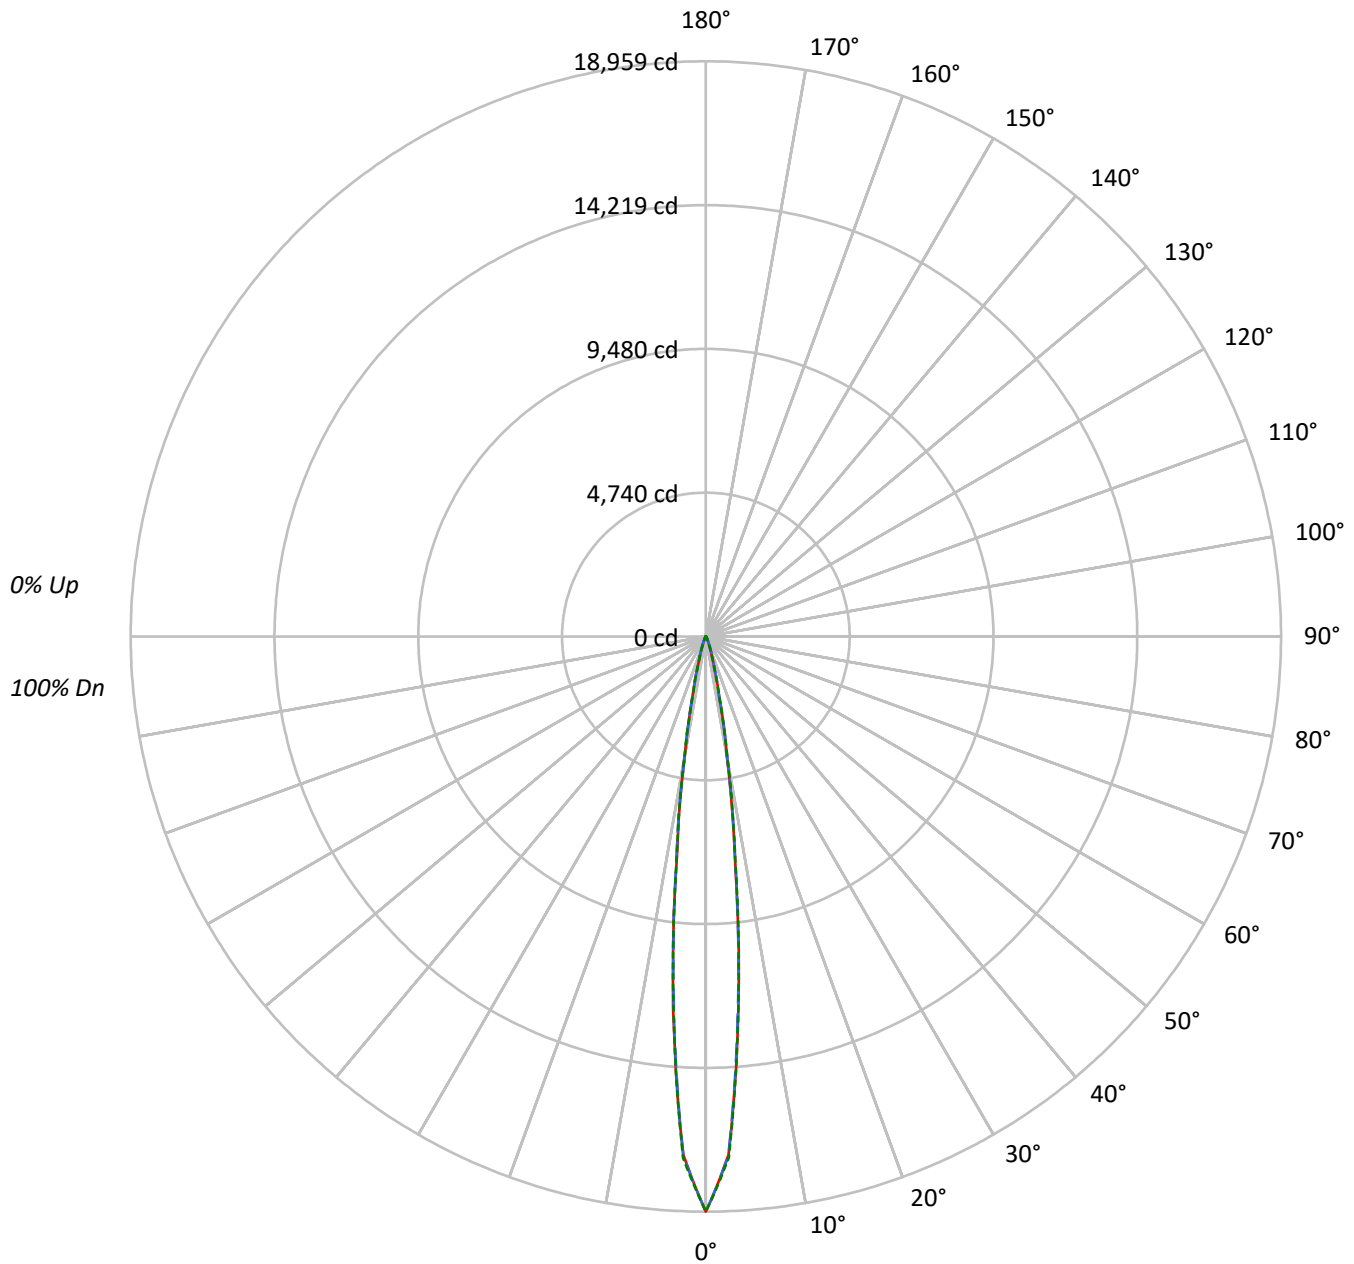

TEST NUMBER: P760980

CATALOG NUMBER: LD6D15D010-EU6DR1515309035-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10		50	30	10			50	30	10			50
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111			106	106	106			102
1	116	114	112	111	113	112	110	109		108	107	106			104	103	103			101
2	113	110	107	105	111	108	106	104		105	103	102			102	101	100			100
3	110	106	103	101	108	105	102	100		103	100	99			100	99	97			98
4	108	103	100	98	106	102	99	97		100	98	96			99	97	95			97
5	106	101	98	95	104	100	97	95		98	96	94			97	95	93			96
6	104	99	95	93	102	98	95	93		97	94	92			96	93	92			95
7	102	97	94	91	101	96	93	91		95	93	91			94	92	90			93
8	100	95	92	90	99	95	92	90		94	91	89			93	91	89			92
9	99	93	90	88	98	93	90	88		92	90	88			92	89	88			91
10	97	92	89	87	96	92	89	87		91	89	87			91	88	87			90

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2133254	2133254	2133254
5°	1253603	1237362	1247159
10°	374145	376757	382524
15°	93067	94874	91947
20°	27844	32246	28433
25°	9815	12503	9940
30°	3609	4747	3669
35°	1808	2041	1750
40°	1143	1257	1143
45°	840	896	840
50°	668	668	668
55°	557	557	557
60°	449	449	449
65°	343	343	343
70°	293	293	293
75°	181	181	242
80°	126	126	126
85°	66	66	66

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 896 cd/sqm

TEST NUMBER: P760980

CATALOG NUMBER: LD6D15D010-EU6DR1515309035-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	902.5	64.9
10°-20°	371.2	26.7
20°-30°	73.7	5.3
30°-40°	18.4	1.3
40°-50°	9.7	0.7
50°-60°	7.1	0.5
60°-70°	5.0	0.4
70°-80°	2.9	0.2
80°-90°	0.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1347.4	96.8
0°-40°	1365.8	98.2
0°-60°	1382.6	99.4
0°-90°	1391.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1391.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	18959	18959	18959	18959	18959	
5°	12335	12208	12175	12260	12272	901
15°	1072	1092	1092	1073	1059	367
25°	126	143	160	142	128	66
35°	25	26	28	26	24	17
45°	12	12	13	12	12	9
55°	8	8	8	8	8	7
65°	5	5	5	5	5	5
75°	2	2	2	2	3	3
85°	1	1	1	1	1	1
90°	0	0	0	0	0	



TEST NUMBER: P760980

CATALOG NUMBER: LD6D15D010-EU6DR1515309035-6LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	18958.9	18958.9	18958.9	18958.9	18958.9
2.5°	17101.7	17116.1	17121.7	17138.6	17201.2
5°	12335.1	12208.2	12175.3	12259.6	12271.7
7.5°	7306.8	7332.5	7426.4	7447.3	7371.8
10°	4009.8	4042.7	4037.8	4066.7	4099.6
12.5°	2050.6	2024.9	2016.9	2049.8	2004.1
15°	1071.5	1091.5	1092.3	1073.1	1058.6
17.5°	576.3	599.5	638.1	606.8	558.6
20°	340.3	361.2	394.1	368.4	347.5
22.5°	210.3	227.1	250.4	230.3	213.5
25°	126.0	142.9	160.5	142.1	127.6
27.5°	74.6	89.1	100.3	88.3	73.8
30°	48.2	56.2	63.4	55.4	49.0
32.5°	33.7	36.9	40.1	36.9	33.7
35°	24.9	26.5	28.1	26.5	24.1
37.5°	19.3	20.9	21.7	20.1	18.5
40°	16.1	16.9	17.7	16.9	16.1
42.5°	13.6	14.4	14.4	14.4	13.6
45°	12.0	12.0	12.8	12.0	12.0
47.5°	10.4	10.4	11.2	10.4	10.4
50°	9.6	9.6	9.6	9.6	9.6
52.5°	8.8	8.8	8.8	8.8	8.8
55°	8.0	8.0	8.0	8.0	8.0
57.5°	7.2	7.2	7.2	7.2	7.2
60°	6.4	6.4	6.4	6.4	6.4
62.5°	5.6	5.6	5.6	5.6	5.6
65°	4.8	4.8	4.8	4.8	4.8
67.5°	4.8	4.8	4.8	4.8	4.8
70°	4.0	4.0	4.0	4.0	4.0
72.5°	3.2	3.2	3.2	3.2	3.2
75°	2.4	2.4	2.4	2.4	3.2
77.5°	2.4	2.4	2.4	2.4	2.4
80°	1.6	1.6	1.6	1.6	1.6
82.5°	1.6	1.6	1.6	1.6	1.6
85°	0.8	0.8	0.8	0.8	0.8
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180° - - 45°-225° - - - 90°-270°







(END OF REPORT)