

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761134

Luminaire Tested: LD6D15D010-EU6DR250215IC9035-6LBDP1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P761134
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D15D010-EU6DR250215IC9035-6LBDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 25° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1383.2 lumens
Efficiency: N/A
Efficacy: 87.5 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.45
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P761134

CATALOG NUMBER: LD6D15D010-EU6DR250215IC9035-6LBDP1LI

Luminous Intensity Polar Plot

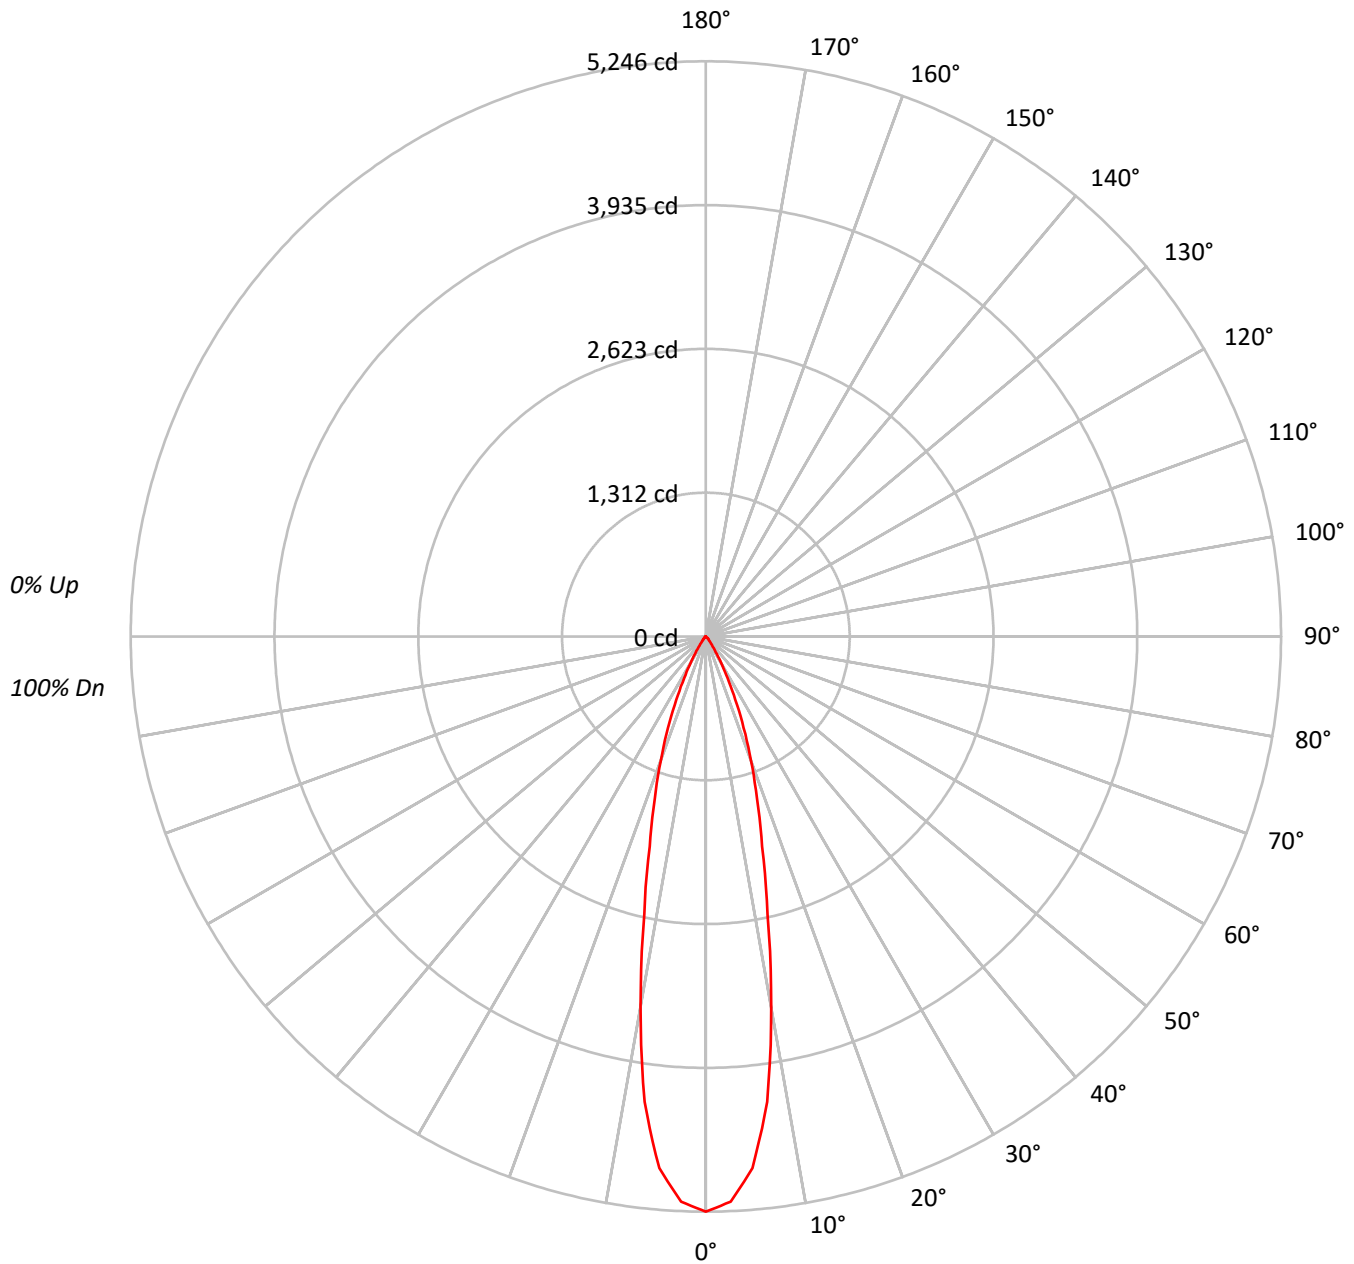



TEST NUMBER: P761134

CATALOG NUMBER: LD6D15D010-EU6DR250215IC9035-6LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	109	112	110	109	107	106	105	104		103	102	101		99
2	111	107	104	101	109	105	102	100	102	100	98		99	97	96		97
3	107	102	98	95	105	101	97	94	98	95	93		96	93	91		94
4	103	97	93	90	102	96	93	90	94	91	89		93	90	88		91
5	100	93	89	86	98	93	89	86	91	87	85		89	86	84		88
6	97	90	85	82	95	89	85	82	88	84	81		87	83	81		85
7	93	87	82	79	92	86	82	79	85	81	78		84	80	78		83
8	91	84	79	76	90	83	79	76	82	78	76		81	78	75		80
9	88	81	76	73	87	80	76	73	80	76	73		79	75	73		78
10	85	78	74	71	85	78	74	71	77	73	71		76	73	71		76

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	573204
5°	533869
10°	380812
15°	224285
20°	139551
25°	76589
30°	35023
35°	13272
40°	6005
45°	3616
50°	1496
55°	972
60°	677
65°	465
70°	64
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3616 cd/sqm



TEST NUMBER: P761134

CATALOG NUMBER: LD6D15D010-EU6DR250215IC9035-6LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	418.3	30.2
10°-20°	566.6	41.0
20°-30°	299.8	21.7
30°-40°	74.0	5.4
40°-50°	18.1	1.3
50°-60°	4.8	0.3
60°-70°	1.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1284.7	92.9
0°-40°	1358.7	98.2
0°-60°	1381.6	99.9
0°-90°	1383.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1383.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5246	
5°	4868	418
15°	1983	567
25°	635	300
35°	100	74
45°	23	18
55°	5	5
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P761134

CATALOG NUMBER: LD6D15D010-EU6DR250215IC9035-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	5246.2
2.5°	5159.9
5°	4867.6
7.5°	4280.1
10°	3432.4
12.5°	2594.7
15°	1982.8
17.5°	1545.4
20°	1200.2
22.5°	900.1
25°	635.3
27.5°	426.0
30°	277.6
32.5°	168.9
35°	99.5
37.5°	60.8
40°	42.1
42.5°	32.2
45°	23.4
47.5°	14.1
50°	8.8
52.5°	6.4
55°	5.1
57.5°	4.0
60°	3.1
62.5°	2.4
65°	1.8
67.5°	0.7
70°	0.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)