

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761517

Luminaire Tested: LD6D15D010-EU6DR500215IC9035-6LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P761517
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D15D010-EU6DR500215IC9035-6LBS1H
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1609.8 lumens
Efficiency: N/A
Efficacy: 101.9 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P761517

CATALOG NUMBER: LD6D15D010-EU6DR500215IC9035-6LBS1H

Luminous Intensity Polar Plot

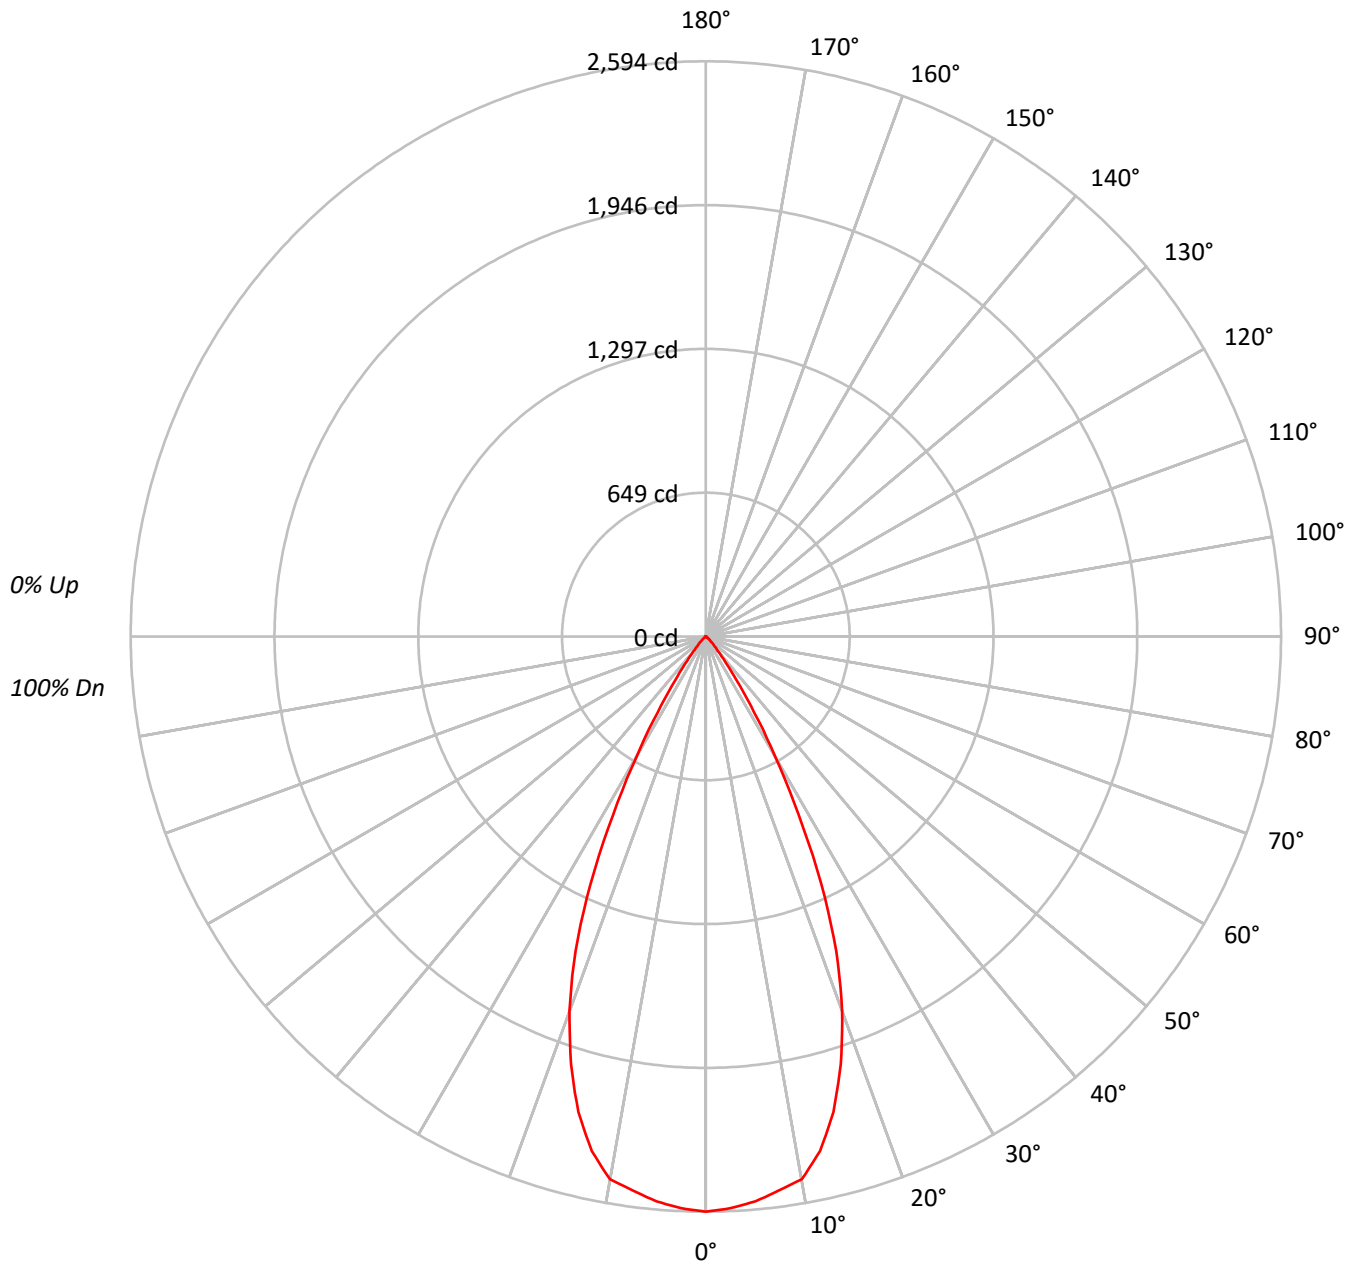



TEST NUMBER: P761517

CATALOG NUMBER: LD6D15D010-EU6DR500215IC9035-6LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	109	107		112	110	108	106		106	104	102		102	101	99		98	97	97
2	109	105	101	98		107	103	100	97		100	98	95		97	95	93		95	93	91
3	105	99	95	91		103	98	94	90		95	92	89		93	90	88		91	88	86
4	100	94	89	85		99	93	88	85		90	87	84		89	85	83		87	84	82
5	96	89	84	80		95	88	83	79		86	82	79		85	81	78		83	80	77
6	92	84	79	75		91	83	79	75		82	78	74		81	77	74		79	76	74
7	88	80	75	71		87	79	74	71		78	74	71		77	73	70		76	73	70
8	85	76	71	67		84	76	71	67		75	70	67		74	70	67		73	69	66
9	81	73	68	64		80	72	67	64		71	67	64		71	67	64		70	66	63
10	78	70	64	61		77	69	64	61		68	64	61		68	64	61		67	63	60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	283422
5°	280447
10°	275824
15°	251161
20°	209000
25°	148356
30°	78524
35°	31999
40°	11881
45°	5439
50°	2227
55°	1162
60°	568
65°	155
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 5439 cd/sqm



TEST NUMBER: P761517

CATALOG NUMBER: LD6D15D010-EU6DR500215IC9035-6LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	241.7	15.0
10°-20°	610.8	37.9
20°-30°	548.7	34.1
30°-40°	171.8	10.7
40°-50°	30.1	1.9
50°-60°	6.0	0.4
60°-70°	0.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1401.1	87.0
0°-40°	1572.9	97.7
0°-60°	1609.0	99.9
0°-90°	1609.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1609.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2594	
5°	2557	242
15°	2220	611
25°	1231	549
35°	240	172
45°	35	30
55°	6	6
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P761517

CATALOG NUMBER: LD6D15D010-EU6DR500215IC9035-6LBS1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	2594.0
2.5°	2581.1
5°	2557.0
7.5°	2520.2
10°	2486.1
12.5°	2376.8
15°	2220.4
17.5°	2021.8
20°	1797.5
22.5°	1537.9
25°	1230.6
27.5°	904.7
30°	622.4
32.5°	405.2
35°	239.9
37.5°	137.8
40°	83.3
42.5°	54.3
45°	35.2
47.5°	21.4
50°	13.1
52.5°	8.9
55°	6.1
57.5°	4.2
60°	2.6
62.5°	1.5
65°	0.6
67.5°	0.2
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)