

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761812

Luminaire Tested: LD6D15D010-EU6DR700215IC9035-6LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P761812
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D15D010-EU6DR700215IC9035-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 865.9 lumens
Efficiency: N/A
Efficacy: 54.8 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P761812

CATALOG NUMBER: LD6D15D010-EU6DR700215IC9035-6LBDP1B

Luminous Intensity Polar Plot

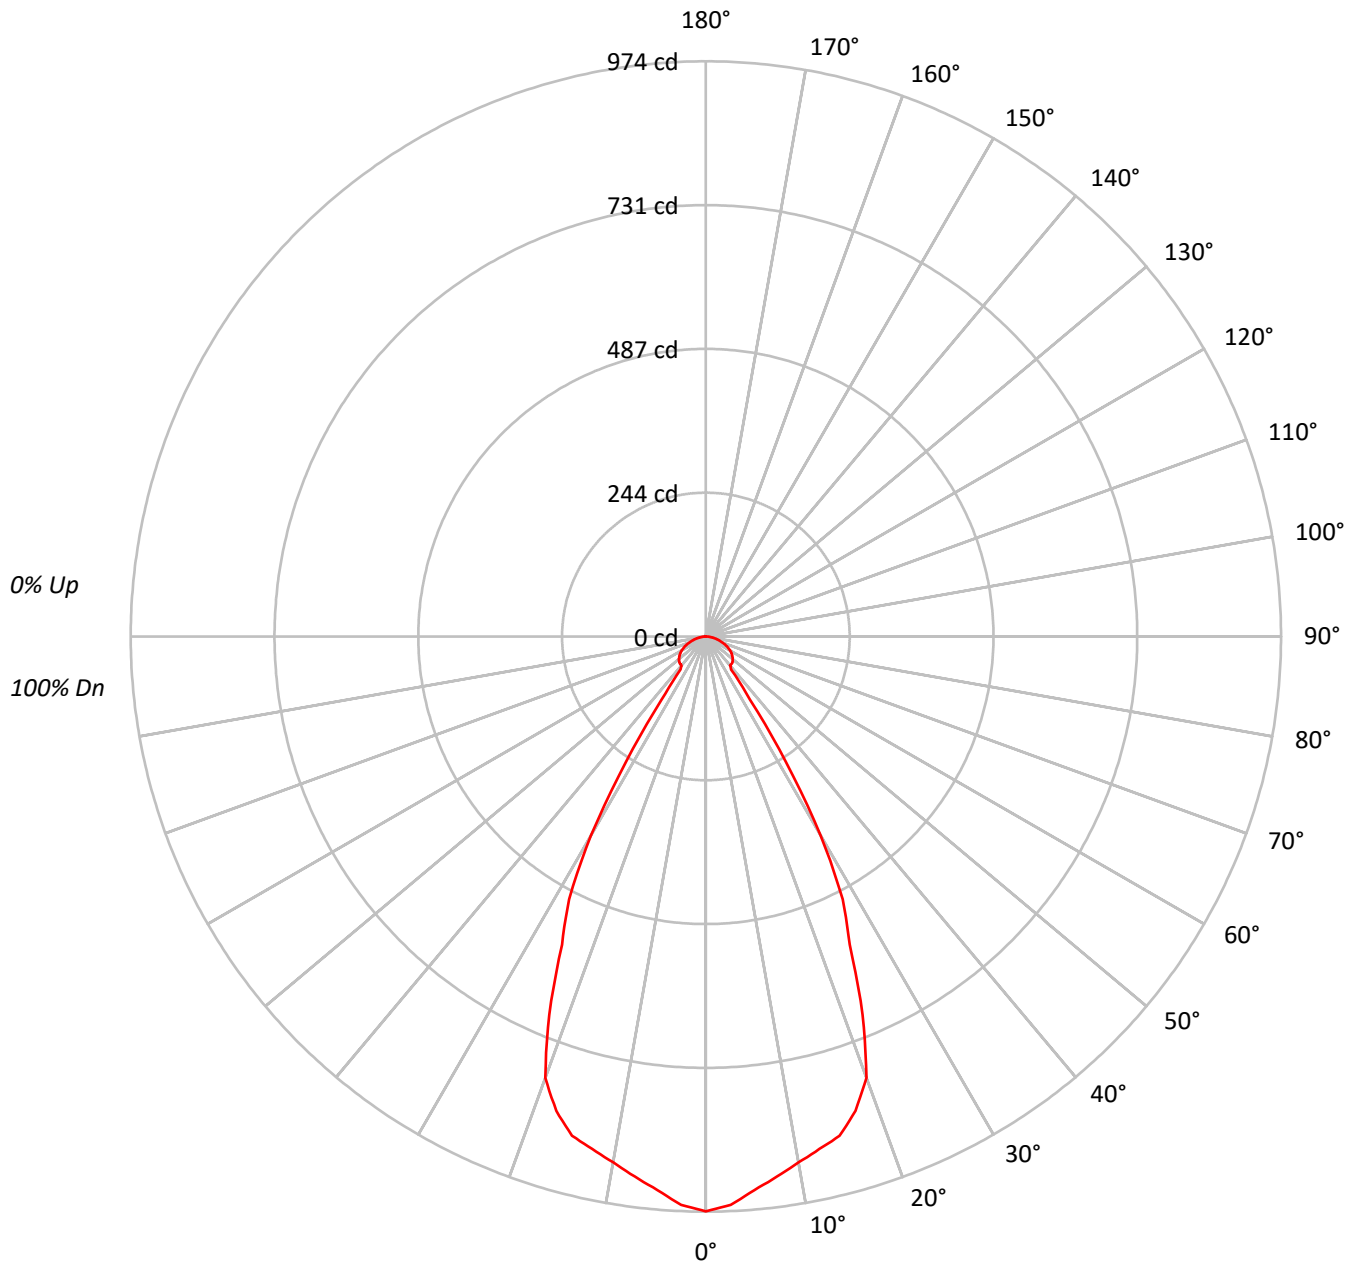



TEST NUMBER: P761812

CATALOG NUMBER: LD6D15D010-EU6DR700215IC9035-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20							
RC	80				70				50				30				10				0			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																								
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91						
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83						
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76						
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70						
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65						
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61						
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57						
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53						
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50						
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48						

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	106365
5°	103207
10°	100329
15°	99010
20°	92449
25°	69464
30°	49103
35°	17393
40°	9143
45°	9735
50°	10097
55°	10286
60°	10336
65°	10109
70°	9552
75°	8865
80°	7865
85°	6393

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 57.5°

Luminance: 10351 cd/sqm



TEST NUMBER: P761812

CATALOG NUMBER: LD6D15D010-EU6DR700215IC9035-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	88.8	10.2
10°-20°	243.4	28.1
20°-30°	268.1	31.0
30°-40°	102.4	11.8
40°-50°	48.4	5.6
50°-60°	48.1	5.6
60°-70°	38.5	4.4
70°-80°	22.1	2.6
80°-90°	6.0	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	600.3	69.3
0°-40°	702.8	81.2
0°-60°	799.2	92.3
0°-90°	865.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	865.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	974	
5°	941	89
15°	875	243
25°	576	268
35°	130	102
45°	63	48
55°	54	48
65°	39	38
75°	21	22
85°	5	6
90°	0	



TEST NUMBER: P761812

CATALOG NUMBER: LD6D15D010-EU6DR700215IC9035-6LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	973.5
2.5°	963.3
5°	941.0
7.5°	922.3
10°	904.3
12.5°	889.0
15°	875.3
17.5°	842.2
20°	795.1
22.5°	693.7
25°	576.2
27.5°	501.6
30°	389.2
32.5°	251.4
35°	130.4
37.5°	70.4
40°	64.1
42.5°	63.7
45°	63.0
47.5°	61.6
50°	59.4
52.5°	56.7
55°	54.0
57.5°	50.9
60°	47.3
62.5°	43.3
65°	39.1
67.5°	34.5
70°	29.9
72.5°	25.3
75°	21.0
77.5°	16.5
80°	12.5
82.5°	8.8
85°	5.1
87.5°	2.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)