

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P736053

Luminaire Tested: LD6D15D010-EU6DR700215IC9035-6LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P736053
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D15D010-EU6DR700215IC9035-6LBS1MW
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1487.5 lumens
Efficiency: N/A
Efficacy: 94.1 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P736053

CATALOG NUMBER: LD6D15D010-EU6DR700215IC9035-6LBS1MW

Luminous Intensity Polar Plot

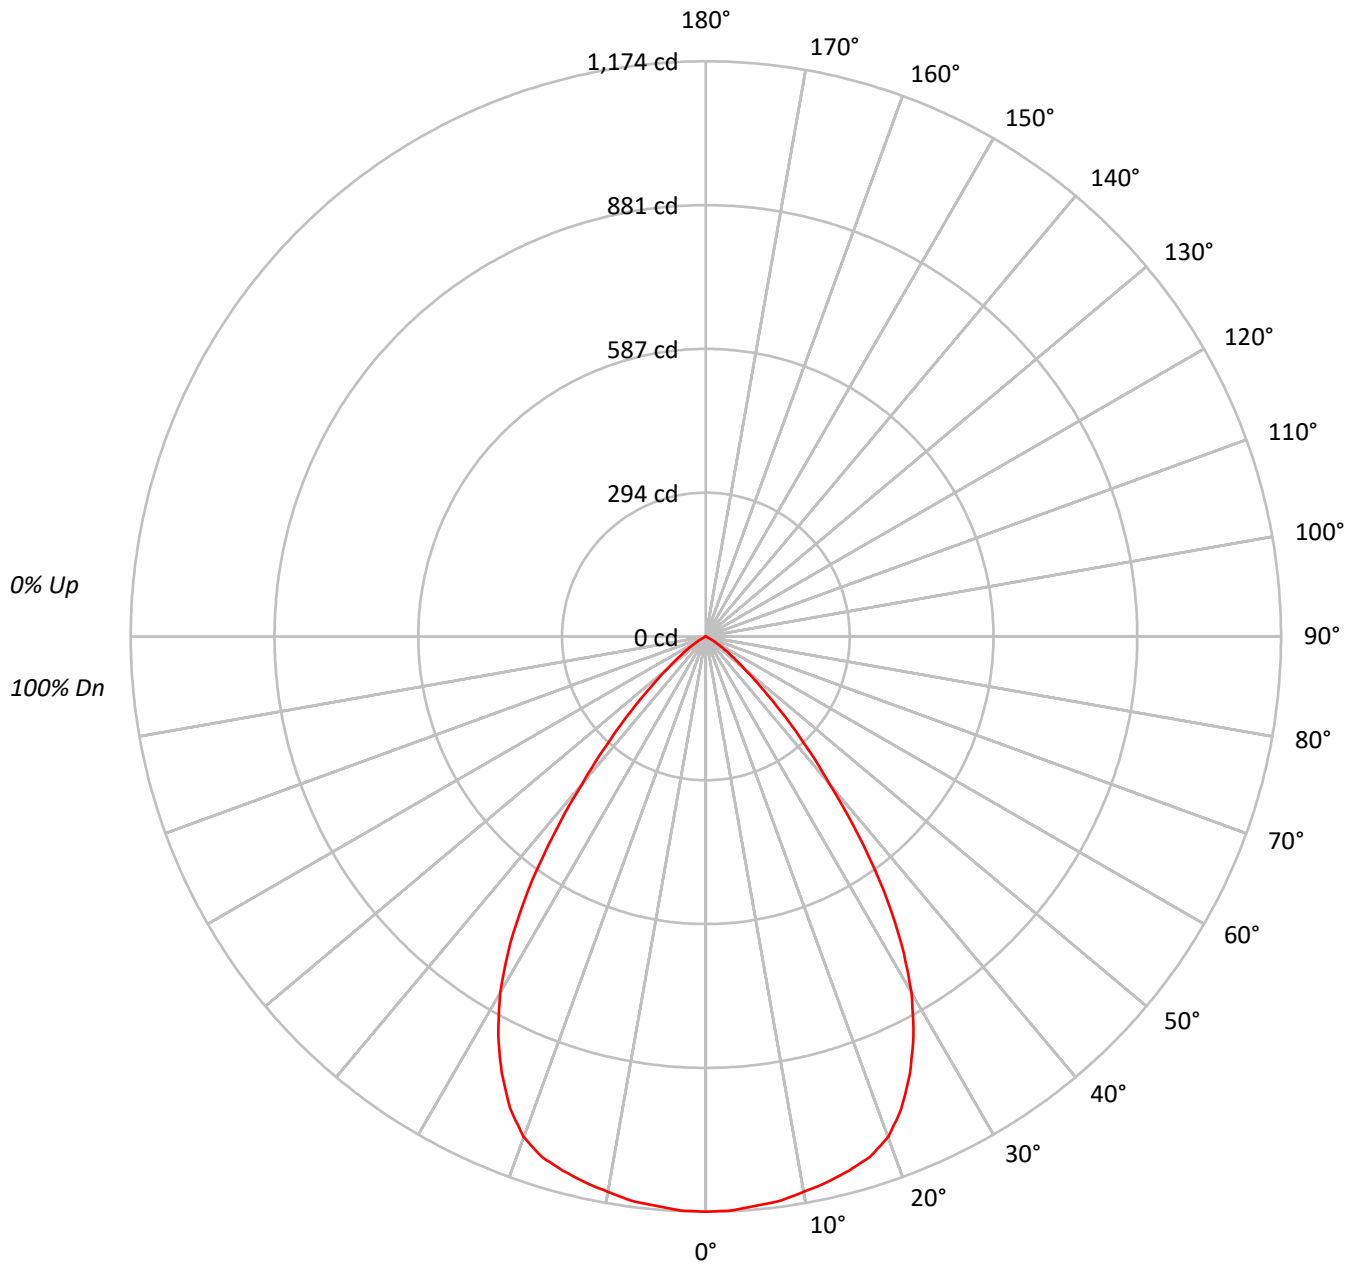



TEST NUMBER: P736053

CATALOG NUMBER: LD6D15D010-EU6DR700215IC9035-6LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	97	94	105	100	96	92	97	93	90		94	91	88		91
3	101	94	88	84	99	92	87	83	90	85	82		87	84	81		85
4	95	87	81	76	93	86	80	76	83	78	75		81	77	74		79
5	89	80	74	69	88	79	73	69	78	72	68		76	71	68		74
6	84	75	68	63	83	74	68	63	72	67	63		71	66	62		69
7	80	69	63	58	78	69	63	58	67	62	58		66	61	57		65
8	75	65	58	54	74	64	58	54	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	53	50		58	53	49		57
10	67	57	50	46	66	56	50	46	55	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	128283
5°	127961
10°	127688
15°	127650
20°	126400
25°	118736
30°	105851
35°	84405
40°	56039
45°	33500
50°	17372
55°	9124
60°	3234
65°	52
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 33500 cd/sqm



TEST NUMBER: P736053

CATALOG NUMBER: LD6D15D010-EU6DR700215IC9035-6LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	111.0	7.5
10°-20°	318.2	21.4
20°-30°	448.9	30.2
30°-40°	387.5	26.1
40°-50°	173.6	11.7
50°-60°	45.4	3.1
60°-70°	2.9	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	878.1	59.0
0°-40°	1265.6	85.1
0°-60°	1484.6	99.8
0°-90°	1487.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1487.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1174	
5°	1167	111
15°	1128	318
25°	985	449
35°	633	388
45°	217	174
55°	48	45
65°	0	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P736053

CATALOG NUMBER: LD6D15D010-EU6DR700215IC9035-6LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1174.1
2.5°	1172.8
5°	1166.7
7.5°	1161.7
10°	1150.9
12.5°	1141.1
15°	1128.5
17.5°	1113.9
20°	1087.1
22.5°	1043.0
25°	984.9
27.5°	917.6
30°	839.0
32.5°	742.9
35°	632.8
37.5°	511.1
40°	392.9
42.5°	298.6
45°	216.8
47.5°	149.5
50°	102.2
52.5°	70.5
55°	47.9
57.5°	28.9
60°	14.8
62.5°	4.6
65°	0.2
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)