

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761450

Luminaire Tested: LD6D15D010-EU6DR450215IC9040-6LBDP1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P761450
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D15D010-EU6DR450215IC9040-6LBDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1629.4 lumens
Efficiency: N/A
Efficacy: 103.1 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P761450

CATALOG NUMBER: LD6D15D010-EU6DR450215IC9040-6LBDP1LI

Luminous Intensity Polar Plot

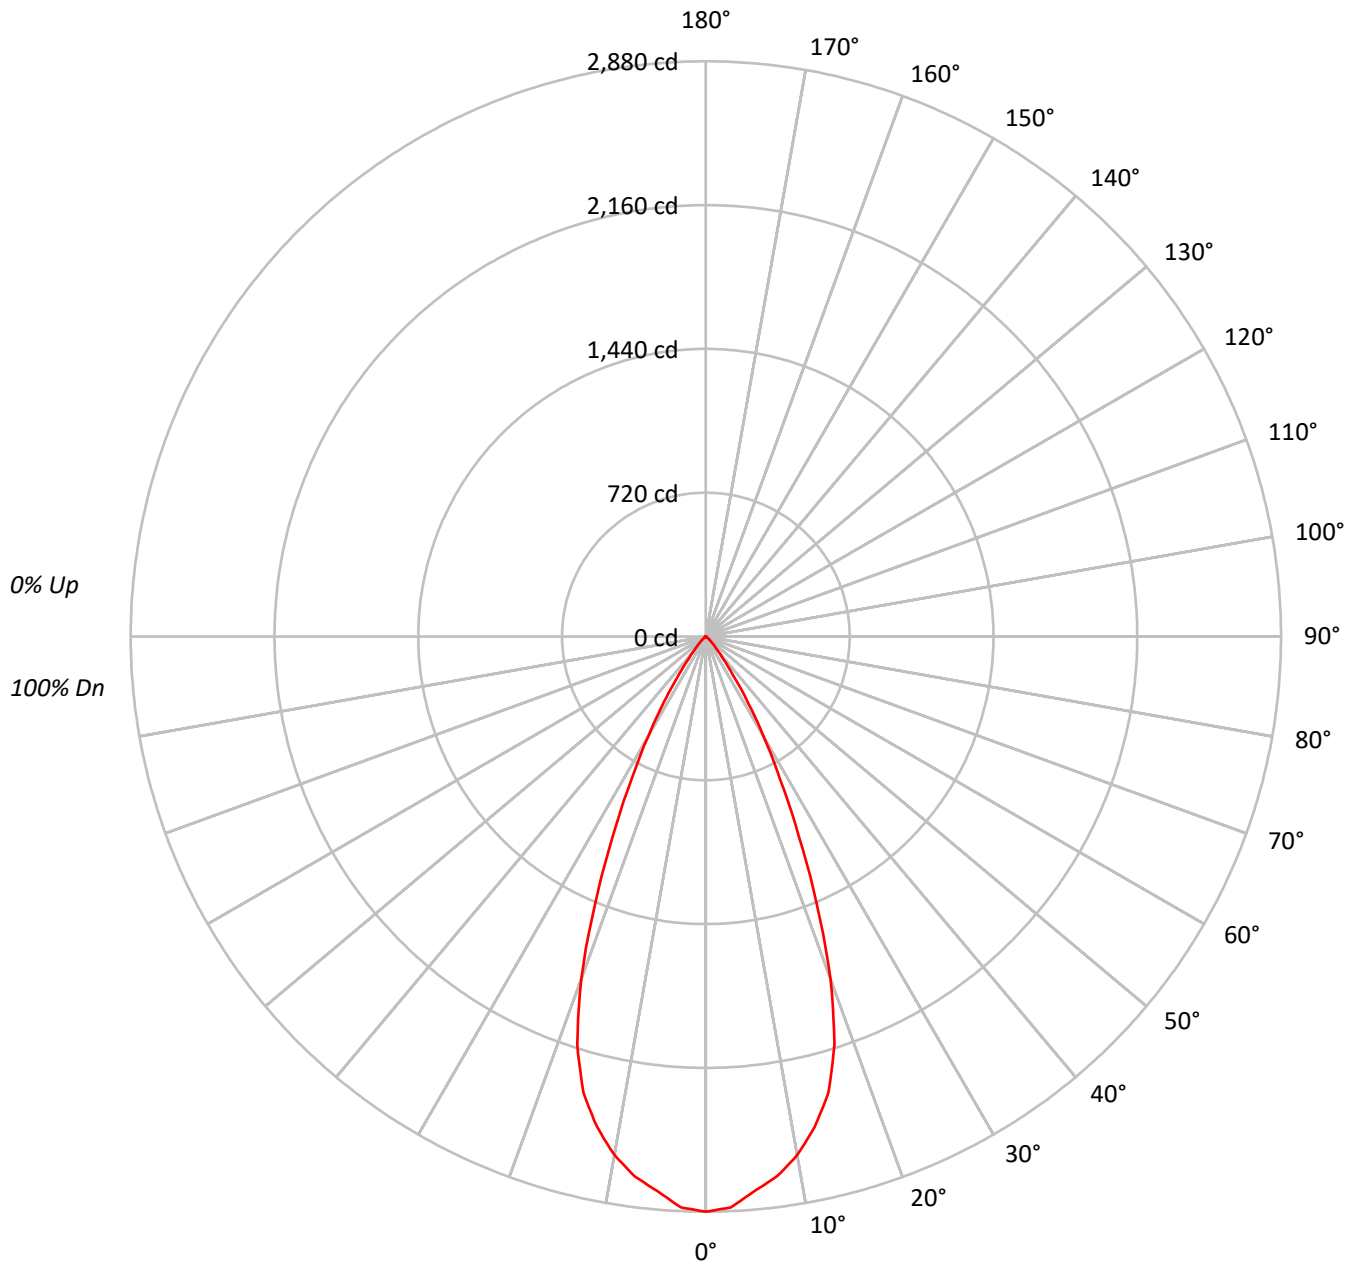



TEST NUMBER: P761450

CATALOG NUMBER: LD6D15D010-EU6DR450215IC9040-6LB DP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20							
RC	80				70				50				30				10				0			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																								
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95						
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90						
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85						
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81						
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77						
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73						
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69						
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66						
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63						
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60						

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	314660
5°	305706
10°	292477
15°	267675
20°	212361
25°	132575
30°	73074
35°	32812
40°	12922
45°	6088
50°	2890
55°	1505
60°	743
65°	181
70°	64
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 6088 cd/sqm



TEST NUMBER: P761450

CATALOG NUMBER: LD6D15D010-EU6DR450215IC9040-6LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	261.9	16.1
10°-20°	644.6	39.6
20°-30°	510.4	31.3
30°-40°	170.0	10.4
40°-50°	33.7	2.1
50°-60°	7.6	0.5
60°-70°	1.1	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1416.9	87.0
0°-40°	1586.8	97.4
0°-60°	1628.2	99.9
0°-90°	1629.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1629.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2880	
5°	2787	262
15°	2366	645
25°	1100	510
35°	246	170
45°	39	34
55°	8	8
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P761450

CATALOG NUMBER: LD6D15D010-EU6DR450215IC9040-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	2879.9
2.5°	2861.1
5°	2787.3
7.5°	2726.3
10°	2636.2
12.5°	2516.2
15°	2366.4
17.5°	2141.3
20°	1826.4
22.5°	1451.3
25°	1099.7
27.5°	805.3
30°	579.2
32.5°	393.9
35°	246.0
37.5°	145.9
40°	90.6
42.5°	59.6
45°	39.4
47.5°	25.4
50°	17.0
52.5°	11.3
55°	7.9
57.5°	5.2
60°	3.4
62.5°	1.8
65°	0.7
67.5°	0.2
70°	0.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)