

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761081

Luminaire Tested: LD6D15D010-EU6DR2015309050-6LBDP1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P761081
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D15D010-EU6DR2015309050-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1360.0 lumens
Efficiency: N/A
Efficacy: 86.1 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P761081

CATALOG NUMBER: LD6D15D010-EU6DR2015309050-6LBDP1B

Luminous Intensity Polar Plot

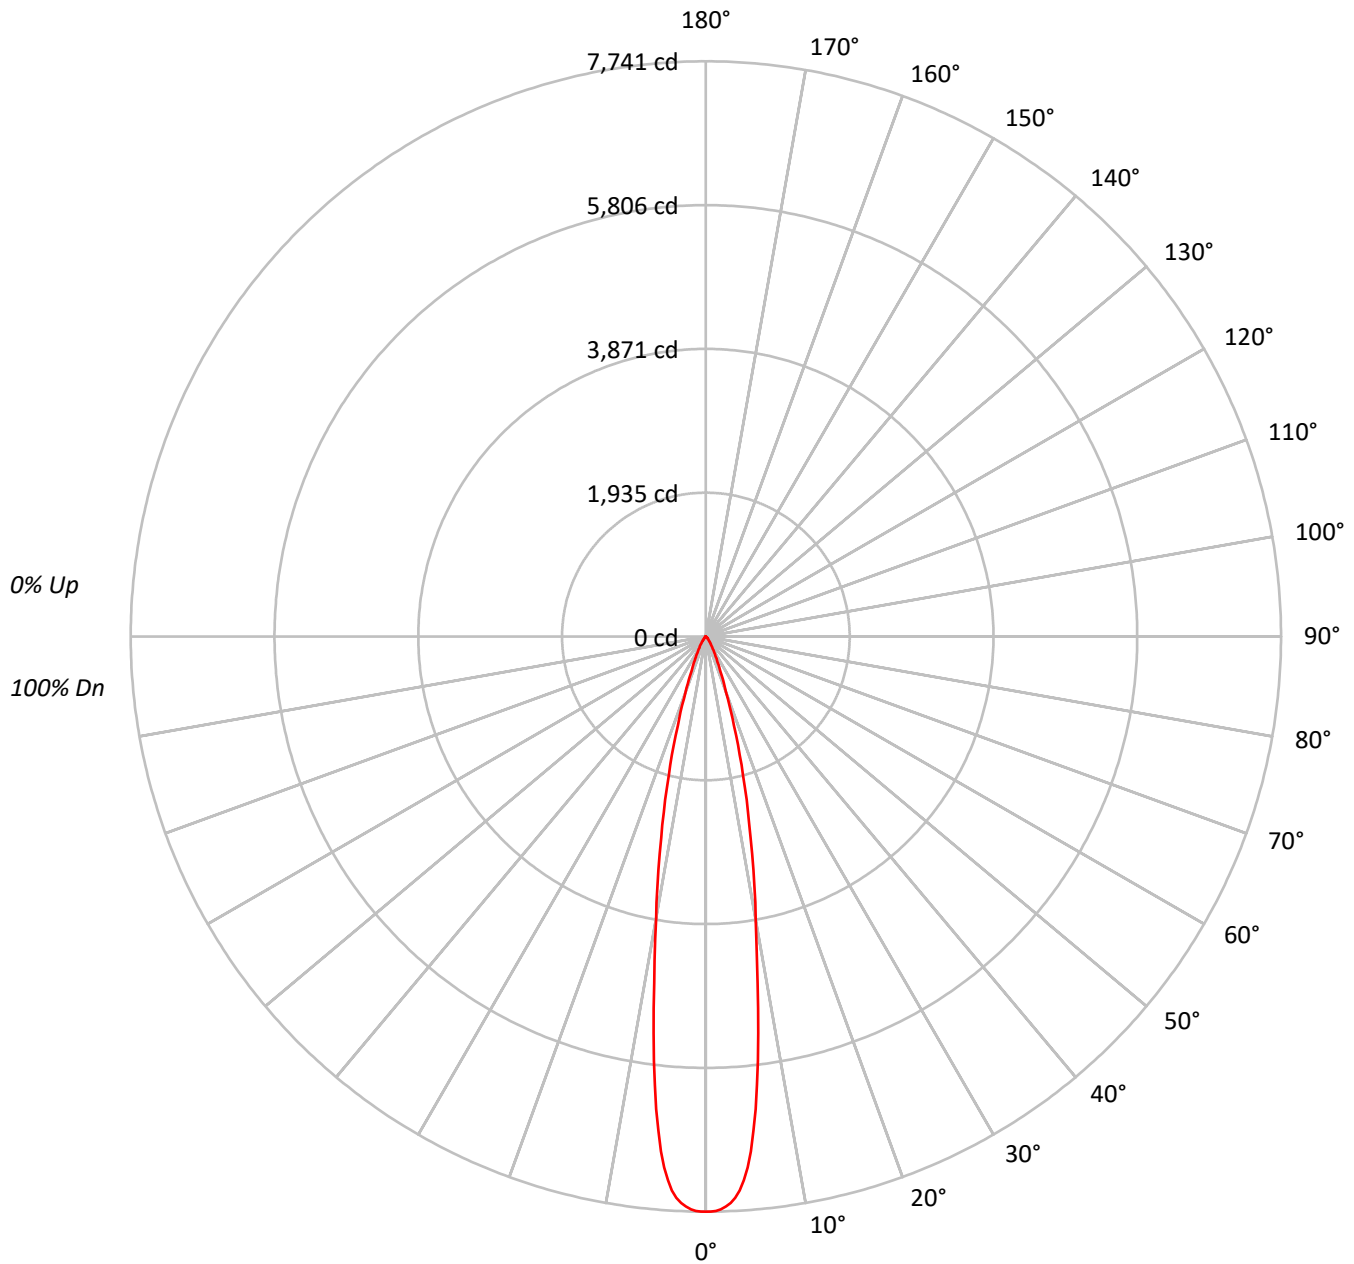



TEST NUMBER: P761081

CATALOG NUMBER: LD6D15D010-EU6DR2015309050-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20							
RC	80				70				50				30				10				0			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																								
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100			
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	97	97			
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	94	94			
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	91	91			
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	88	88			
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	85	85			
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	83	83			
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	81	81			
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	79	79			
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	77	77			
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	75	75			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	845787
5°	763064
10°	428275
15°	217701
20°	92170
25°	42544
30°	22520
35°	12138
40°	6490
45°	3832
50°	2227
55°	1181
60°	743
65°	543
70°	224
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3832 cd/sqm



TEST NUMBER: P761081

CATALOG NUMBER: LD6D15D010-EU6DR2015309050-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	551.1	40.5
10°-20°	542.7	39.9
20°-30°	177.3	13.0
30°-40°	60.4	4.4
40°-50°	20.3	1.5
50°-60°	6.1	0.4
60°-70°	2.1	0.2
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1271.1	93.5
0°-40°	1331.5	97.9
0°-60°	1357.9	99.8
0°-90°	1360.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1360.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7741	
5°	6957	551
15°	1925	543
25°	353	177
35°	91	60
45°	25	20
55°	6	6
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P761081

CATALOG NUMBER: LD6D15D010-EU6DR2015309050-6LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	7741.0
0.5°	7741.0
1°	7731.4
1.5°	7712.1
2°	7676.9
2.5°	7630.0
3°	7563.9
3.5°	7471.5
4°	7334.3
4.5°	7167.5
5°	6957.3
5.5°	6680.8
6°	6397.5
6.5°	6072.9
7°	5755.1
7.5°	5382.9
8°	5050.6
8.5°	4716.3
9°	4407.5
9.5°	4124.2
10°	3860.2
12.5°	2771.7
15°	1924.6
17.5°	1257.3
20°	792.7
22.5°	513.5
25°	352.9
27.5°	248.2
30°	178.5
32.5°	128.2
35°	91.0
37.5°	63.4
40°	45.5
42.5°	33.1
45°	24.8
47.5°	19.3
50°	13.1
52.5°	8.3
55°	6.2
57.5°	4.8
60°	3.4
62.5°	2.8
65°	2.1



TEST NUMBER: P761081

CATALOG NUMBER: LD6D15D010-EU6DR2015309050-6LBDP1B

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







67.5°	1.4
70°	0.7



(END OF REPORT)