

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761309

Luminaire Tested: LD6D15D010-EU6DR350215IC9050-6LBDP1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P761309
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D15D010-EU6DR350215IC9050-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 35° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1237.9 lumens
Efficiency: N/A
Efficacy: 78.3 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P761309

CATALOG NUMBER: LD6D15D010-EU6DR350215IC9050-6LBDP1B

Luminous Intensity Polar Plot

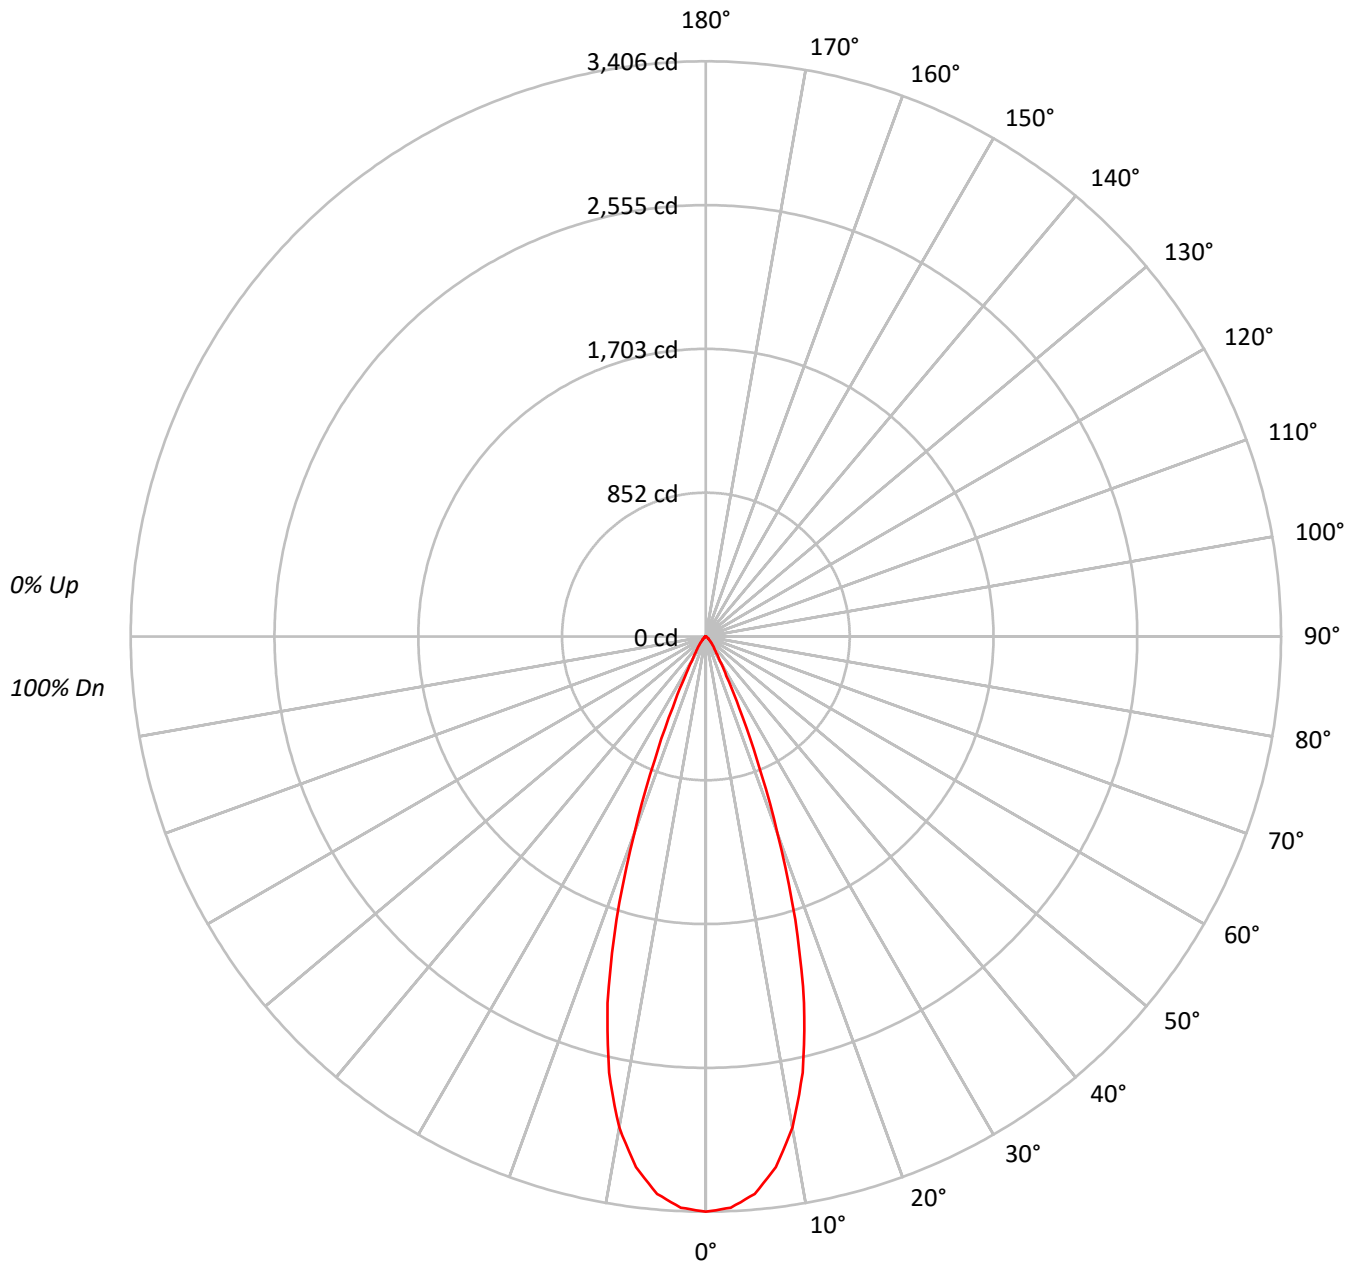



TEST NUMBER: P761309

CATALOG NUMBER: LD6D15D010-EU6DR350215IC9050-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20							
RC	80				70				50				30				10				0			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																								
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96						
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92						
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88						
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84						
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81						
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78						
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75						
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72						
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70						
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68						

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	372142
5°	363396
10°	327513
15°	254203
20°	144178
25°	56095
30°	20931
35°	11471
40°	7488
45°	4558
50°	2907
55°	2057
60°	1508
65°	827
70°	64
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4558 cd/sqm



TEST NUMBER: P761309

CATALOG NUMBER: LD6D15D010-EU6DR350215IC9050-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	304.7	24.6
10°-20°	595.0	48.1
20°-30°	242.6	19.6
30°-40°	58.1	4.7
40°-50°	24.2	2.0
50°-60°	10.0	0.8
60°-70°	3.1	0.3
70°-80°	0.1	0.0
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1142.3	92.3
0°-40°	1200.4	97.0
0°-60°	1234.6	99.7
0°-90°	1237.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1237.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3406	
5°	3313	305
15°	2247	595
25°	465	243
35°	86	58
45°	30	24
55°	11	10
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P761309

CATALOG NUMBER: LD6D15D010-EU6DR350215IC9050-6LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	3406.0
2.5°	3385.5
5°	3313.3
7.5°	3169.1
10°	2952.0
12.5°	2646.3
15°	2247.3
17.5°	1759.4
20°	1240.0
22.5°	790.7
25°	465.3
27.5°	263.0
30°	165.9
32.5°	116.5
35°	86.0
37.5°	66.5
40°	52.5
42.5°	40.5
45°	29.5
47.5°	22.1
50°	17.1
52.5°	13.6
55°	10.8
57.5°	8.7
60°	6.9
62.5°	5.0
65°	3.2
67.5°	1.1
70°	0.2
72.5°	0.2
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.2
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)