

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761690

Luminaire Tested: LD6D15D010-EU6DR600215IC9050-6LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P761690
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D15D010-EU6DR600215IC9050-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1359.8 lumens
Efficiency: N/A
Efficacy: 86.1 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P761690

CATALOG NUMBER: LD6D15D010-EU6DR600215IC9050-6LBDP1MW

Luminous Intensity Polar Plot

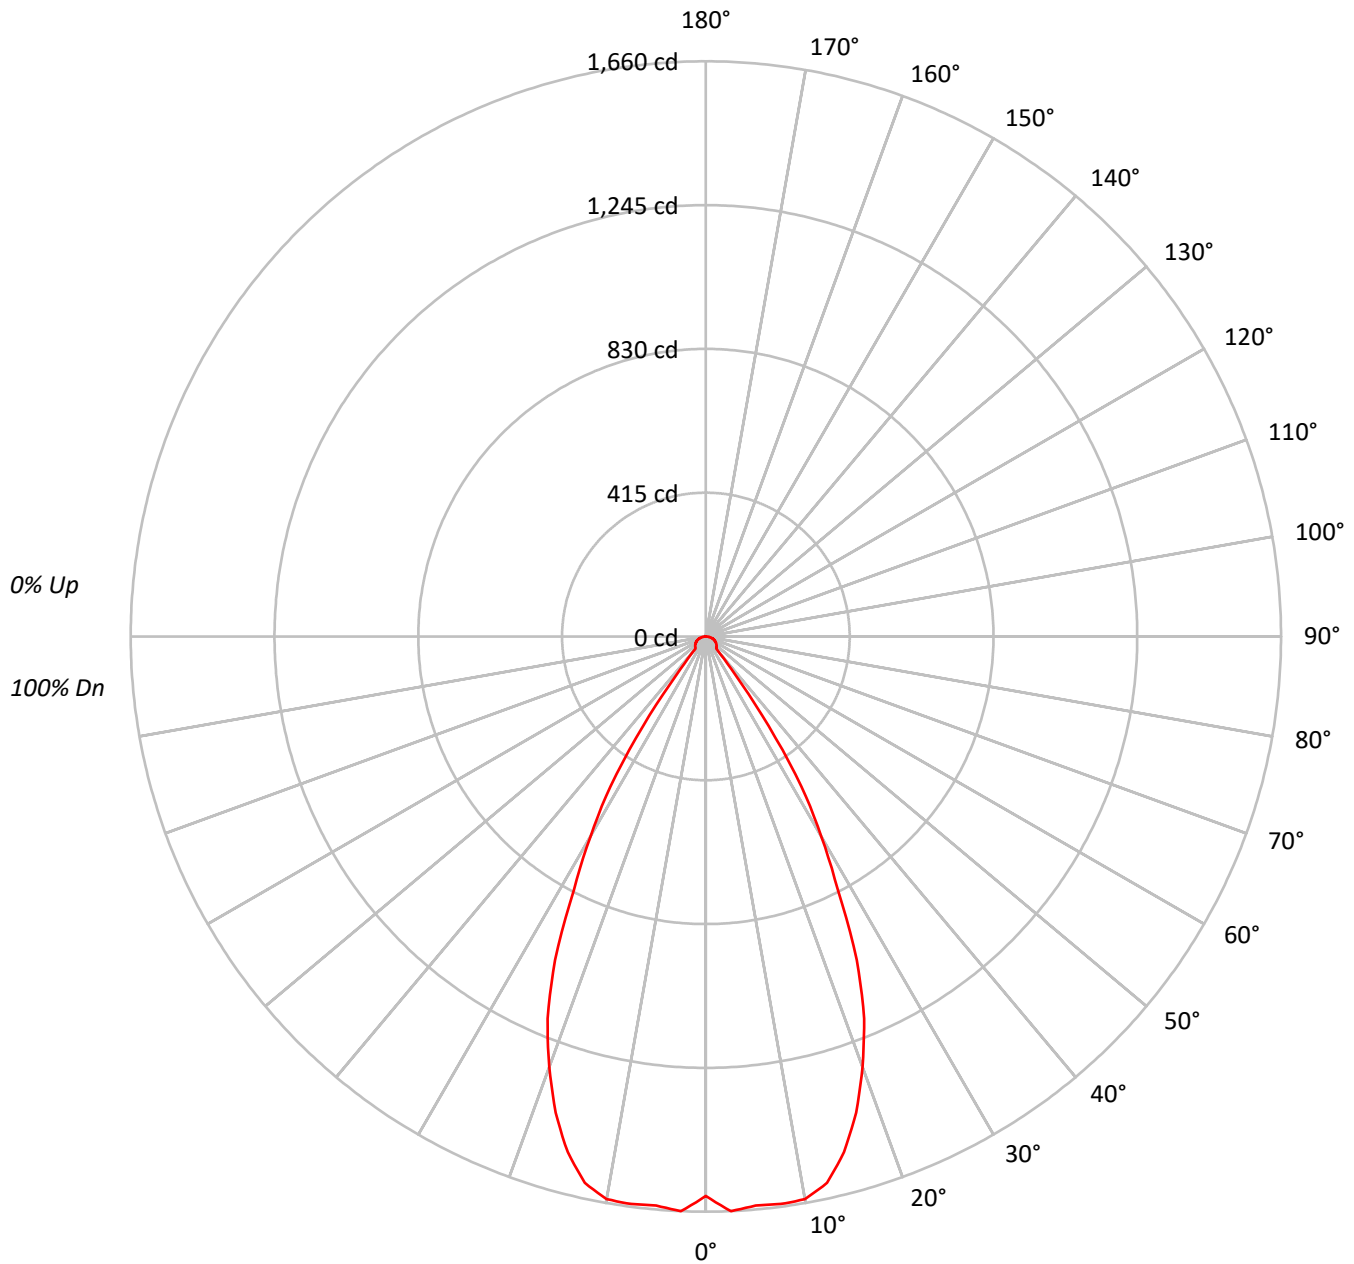

TEST NUMBER: P761690

CATALOG NUMBER: LD6D15D010-EU6DR600215IC9050-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93		
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86		
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80		
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75		
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70		
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66		
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62		
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59		
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55		
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	176445
5°	180782
10°	182962
15°	174299
20°	153678
25°	124293
30°	84075
35°	42136
40°	6832
45°	6691
50°	6833
55°	6934
60°	7124
65°	7291
70°	7443
75°	7557
80°	7299
85°	6017

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 75°

Luminance: 7557 cd/sqm



TEST NUMBER: P761690

CATALOG NUMBER: LD6D15D010-EU6DR600215IC9050-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.5	11.6
10°-20°	426.2	31.3
20°-30°	458.6	33.7
30°-40°	199.4	14.7
40°-50°	33.5	2.5
50°-60°	32.6	2.4
60°-70°	27.8	2.0
70°-80°	18.6	1.4
80°-90°	5.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1042.3	76.7
0°-40°	1241.7	91.3
0°-60°	1307.7	96.2
0°-90°	1359.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1359.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1615	
5°	1648	158
15°	1541	426
25°	1031	459
35°	316	199
45°	43	33
55°	36	33
65°	28	28
75°	18	19
85°	5	6
90°	0	



TEST NUMBER: P761690

CATALOG NUMBER: LD6D15D010-EU6DR600215IC9050-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1614.9
2.5°	1660.3
5°	1648.3
7.5°	1652.1
10°	1649.1
12.5°	1615.1
15°	1540.9
17.5°	1441.3
20°	1321.7
22.5°	1193.7
25°	1031.0
27.5°	824.6
30°	666.4
32.5°	513.7
35°	315.9
37.5°	135.2
40°	47.9
42.5°	44.1
45°	43.3
47.5°	41.8
50°	40.2
52.5°	38.3
55°	36.4
57.5°	34.5
60°	32.6
62.5°	30.5
65°	28.2
67.5°	25.8
70°	23.3
72.5°	20.6
75°	17.9
77.5°	14.7
80°	11.6
82.5°	8.2
85°	4.8
87.5°	1.7
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)