

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761694

Luminaire Tested: LD6D15D010-EU6DR600215IC9050-6LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P761694
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-60)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D15D010-EU6DR600215IC9050-6LBS1MW
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1502.0 lumens
Efficiency: N/A
Efficacy: 95.1 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P761694

CATALOG NUMBER: LD6D15D010-EU6DR600215IC9050-6LBS1MW

Luminous Intensity Polar Plot

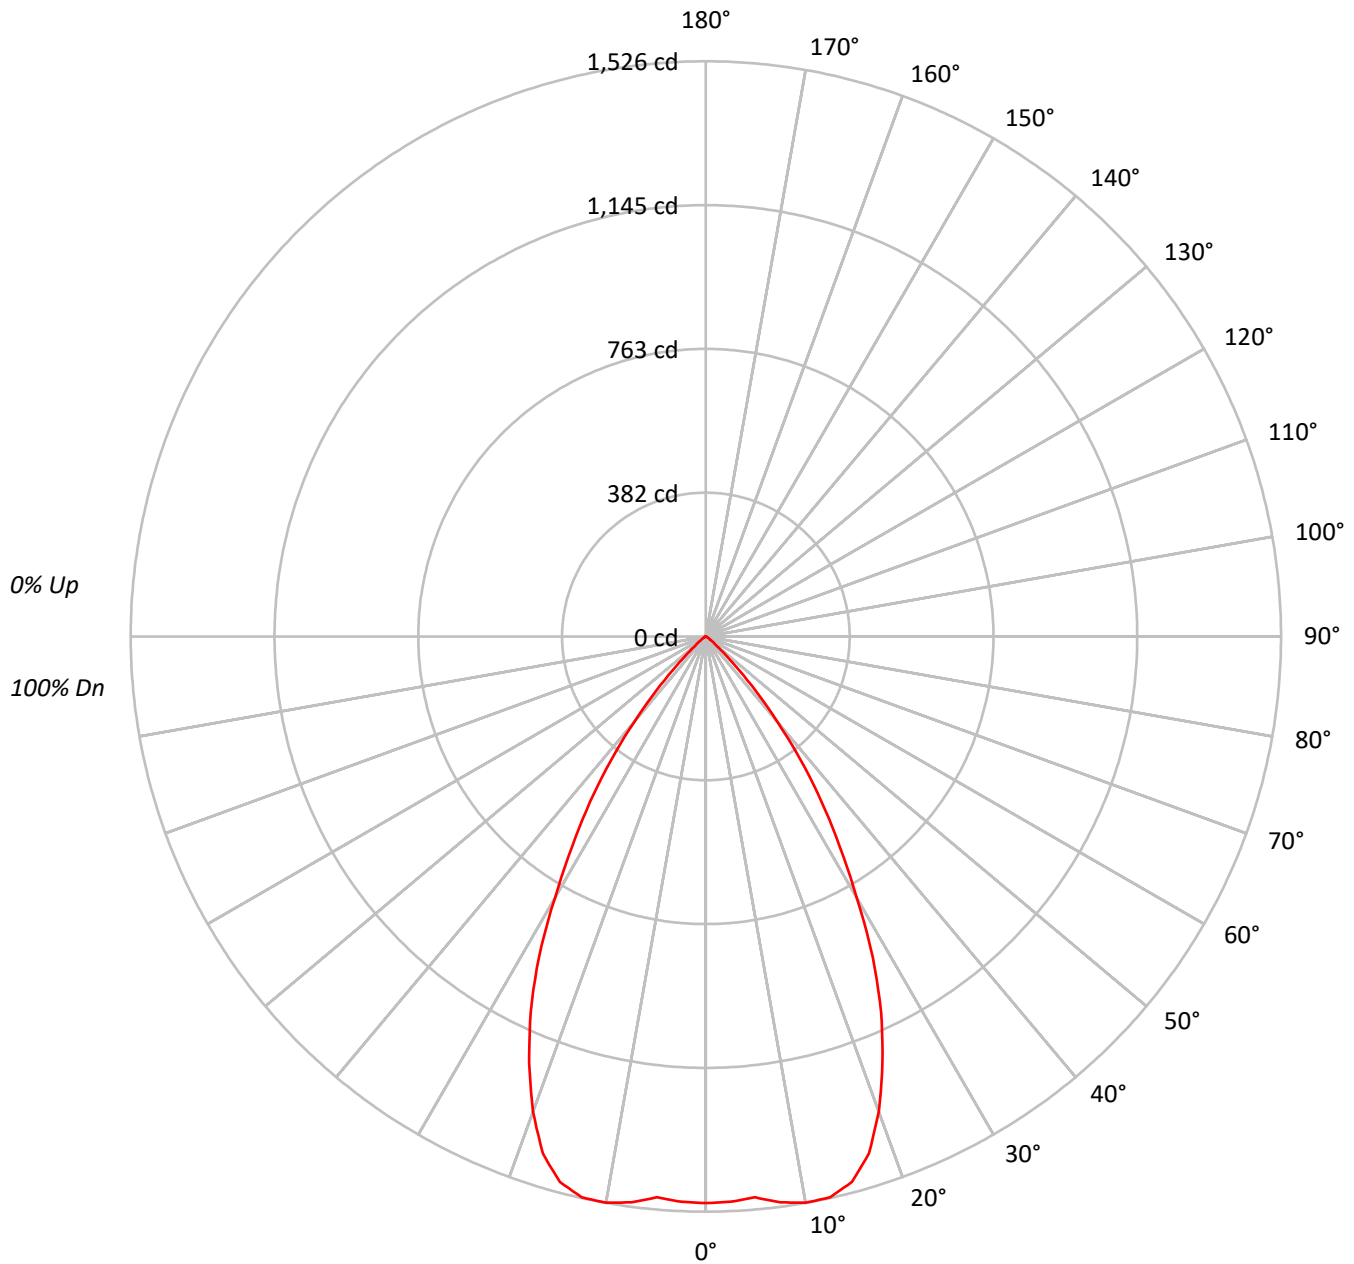



TEST NUMBER: P761694

CATALOG NUMBER: LD6D15D010-EU6DR600215IC9050-6LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	108	106		111	109	106	104		105	103	101		101	99	98		97	96	95
2	108	103	99	96		106	101	98	95		98	95	92		95	93	90		92	90	89
3	102	96	91	87		100	95	90	86		92	88	85		90	86	84		87	85	82
4	97	90	84	80		95	88	83	79		86	82	78		84	81	78		82	79	77
5	92	84	78	74		91	83	77	73		81	76	73		79	75	72		78	74	71
6	88	79	73	68		86	78	72	68		76	71	68		75	70	67		74	70	67
7	83	74	68	63		82	73	67	63		72	67	63		71	66	63		69	65	62
8	79	69	63	59		78	69	63	59		68	63	59		67	62	59		66	61	58
9	75	65	59	55		74	65	59	55		64	59	55		63	58	55		62	58	55
10	72	62	56	52		71	61	56	52		61	55	52		60	55	52		59	55	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	164230
5°	163826
10°	169271
15°	169446
20°	155910
25°	132611
30°	101044
35°	71453
40°	41962
45°	16920
50°	5643
55°	2724
60°	1114
65°	155
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 16920 cd/sqm



TEST NUMBER: P761694

CATALOG NUMBER: LD6D15D010-EU6DR600215IC9050-6LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	144.1	9.6
10°-20°	415.0	27.6
20°-30°	496.7	33.1
30°-40°	332.2	22.1
40°-50°	98.5	6.6
50°-60°	14.2	0.9
60°-70°	1.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1055.8	70.3
0°-40°	1388.0	92.4
0°-60°	1500.6	99.9
0°-90°	1502.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1502.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1503	
5°	1494	144
15°	1498	415
25°	1100	497
35°	536	332
45°	110	98
55°	14	14
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P761694

CATALOG NUMBER: LD6D15D010-EU6DR600215IC9050-6LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1503.1
2.5°	1501.2
5°	1493.7
7.5°	1514.0
10°	1525.7
12.5°	1523.6
15°	1498.0
17.5°	1437.7
20°	1340.9
22.5°	1224.7
25°	1100.0
27.5°	959.5
30°	800.9
32.5°	659.4
35°	535.7
37.5°	411.8
40°	294.2
42.5°	194.0
45°	109.5
47.5°	56.1
50°	33.2
52.5°	21.5
55°	14.3
57.5°	9.2
60°	5.1
62.5°	2.1
65°	0.6
67.5°	0.2
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)