

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761888

Luminaire Tested: LD6D20D010-EU6DR1015209035-6LBDP1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P761888
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D20D010-EU6DR1015209035-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 10° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2004.1 lumens
Efficiency: N/A
Efficacy: 86.8 lumens/watt
Spacing Criteria (0/90/45): 0.17 / 0.17 / 0.18
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 23.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P761888

CATALOG NUMBER: LD6D20D010-EU6DR1015209035-6LBDP1H

Luminous Intensity Polar Plot

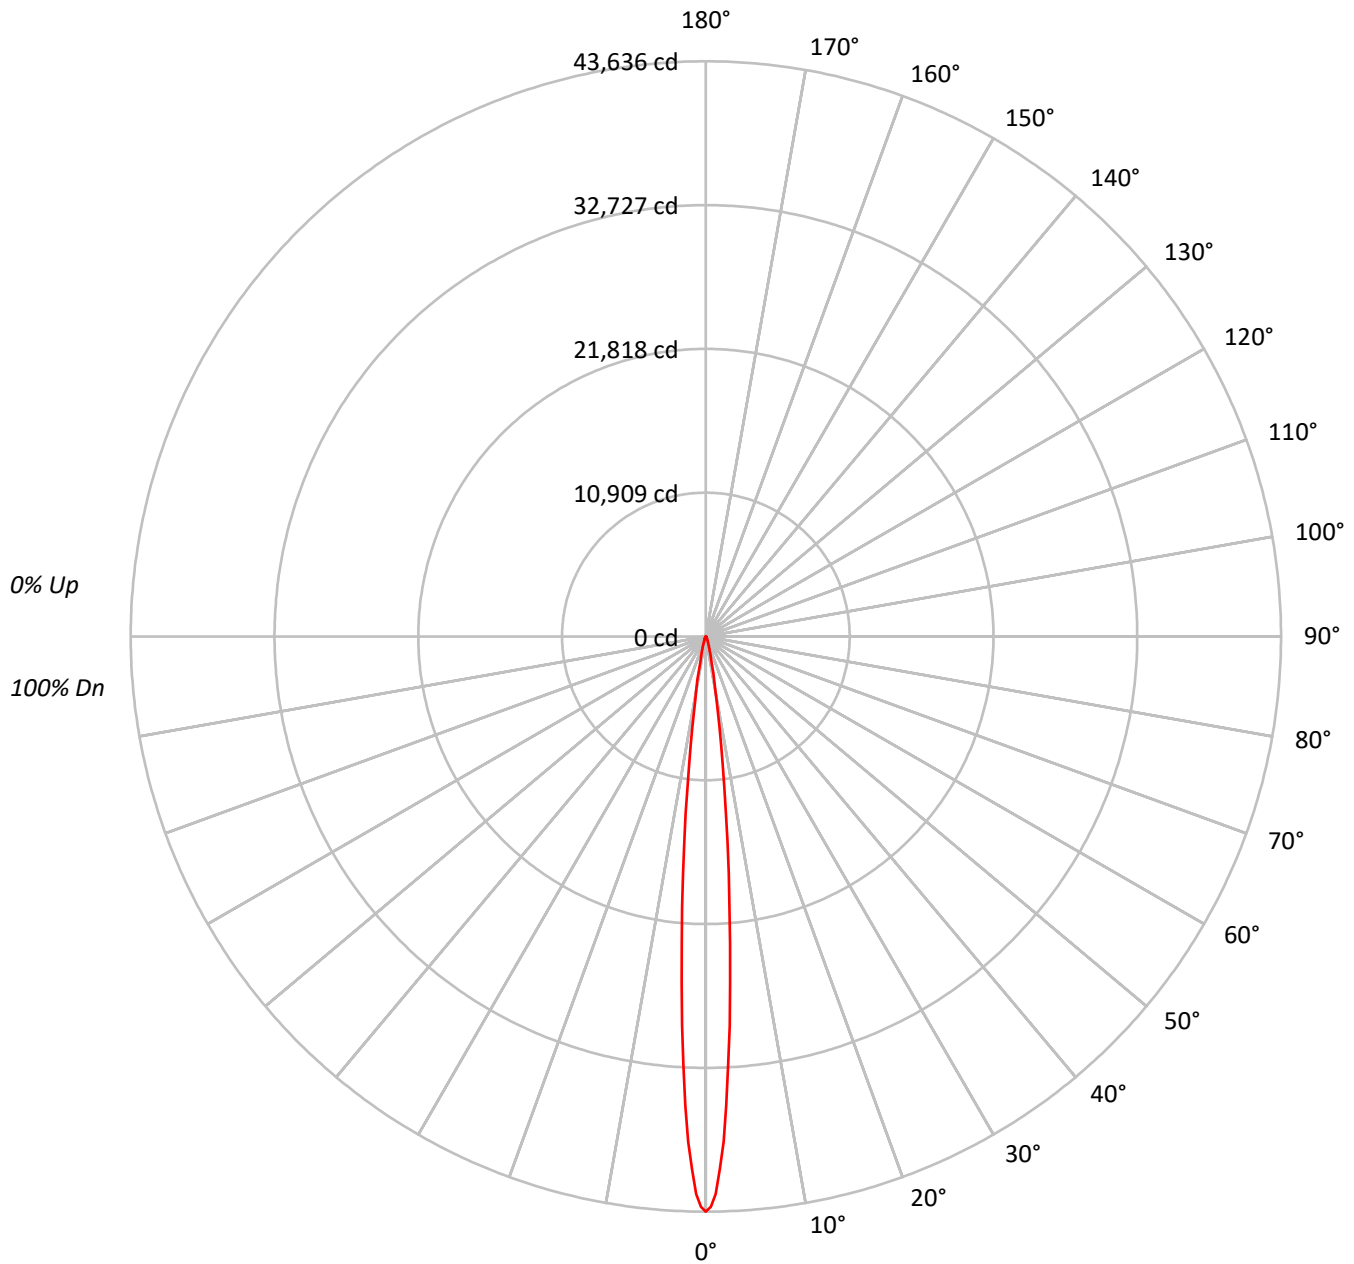

CATALOG NUMBER: LD6D20D010-EU6DR1015209035-6LBDP1H

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10			
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102			
1	116	114	113	111	114	112	111	109	108	107	106	104	104	103	101	101	100			
2	113	110	108	106	111	108	106	104	105	104	102	103	101	100	100	99	98			
3	111	107	104	102	109	106	103	101	103	101	99	101	99	98	99	98	96			
4	108	104	101	99	107	103	100	98	101	99	97	99	97	96	98	96	95			
5	106	102	99	96	105	101	98	96	99	97	95	98	96	94	97	95	94			
6	104	100	96	94	103	99	96	94	98	95	93	97	94	93	96	94	92			
7	103	98	95	93	102	97	94	92	96	94	92	95	93	92	95	93	91			
8	101	96	93	91	100	96	93	91	95	92	91	94	92	90	93	92	90			
9	100	95	92	90	99	94	92	90	94	91	90	93	91	89	93	91	89			
10	98	94	91	89	98	93	91	89	93	90	88	92	90	88	92	90	88			

	0°
0°	4767680
5°	2260817
10°	463667
15°	127288
20°	51300
25°	27487
30°	16262
35°	10577
40°	7074
45°	4589
50°	2533
55°	1886
60°	1093
65°	0
70°	0
75°	0
80°	0
85°	0

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 4589 cd/sqm



TEST NUMBER: P761888

CATALOG NUMBER: LD6D20D010-EU6DR1015209035-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1425.0	71.1
10°-20°	385.6	19.2
20°-30°	110.4	5.5
30°-40°	50.4	2.5
40°-50°	23.1	1.2
50°-60°	7.7	0.4
60°-70°	1.8	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1921.0	95.9
0°-40°	1971.4	98.4
0°-60°	2002.3	99.9
0°-90°	2004.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2004.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	43636	
5°	20613	###
15°	1125	386
25°	228	110
35°	79	50
45°	30	23
55°	10	8
65°	0	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P761888

CATALOG NUMBER: LD6D20D010-EU6DR1015209035-6LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	43635.8
0.5°	43259.0
1°	42292.3
1.5°	40428.3
2°	38341.2
2.5°	35584.8
3°	32521.1
3.5°	29556.5
4°	26359.0
4.5°	23414.2
5°	20613.2
5.5°	18075.0
6°	15655.7
6.5°	13529.0
7°	11526.2
7.5°	9815.8
8°	8298.8
8.5°	6970.2
9°	5820.1
9.5°	4942.6
10°	4179.2
12.5°	1992.9
15°	1125.3
17.5°	684.1
20°	441.2
22.5°	307.4
25°	228.0
27.5°	168.6
30°	128.9
32.5°	99.1
35°	79.3
37.5°	59.5
40°	49.6
42.5°	39.7
45°	29.7
47.5°	19.8
50°	14.9
52.5°	9.9
55°	9.9
57.5°	5.0
60°	5.0
62.5°	5.0
65°	0.0



TEST NUMBER: P761888

CATALOG NUMBER: LD6D20D010-EU6DR1015209035-6LBDP1H

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







67.5°	0.0
70°	0.0



(END OF REPORT)