

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P763883

Luminaire Tested: LD6D30D010-EU6DR2015309024-6LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P763883
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D30D010-EU6DR2015309024-6LBS1MW
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2946.4 lumens
Efficiency: N/A
Efficacy: 101.6 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 29
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P763883

CATALOG NUMBER: LD6D30D010-EU6DR2015309024-6LBS1MW

Luminous Intensity Polar Plot

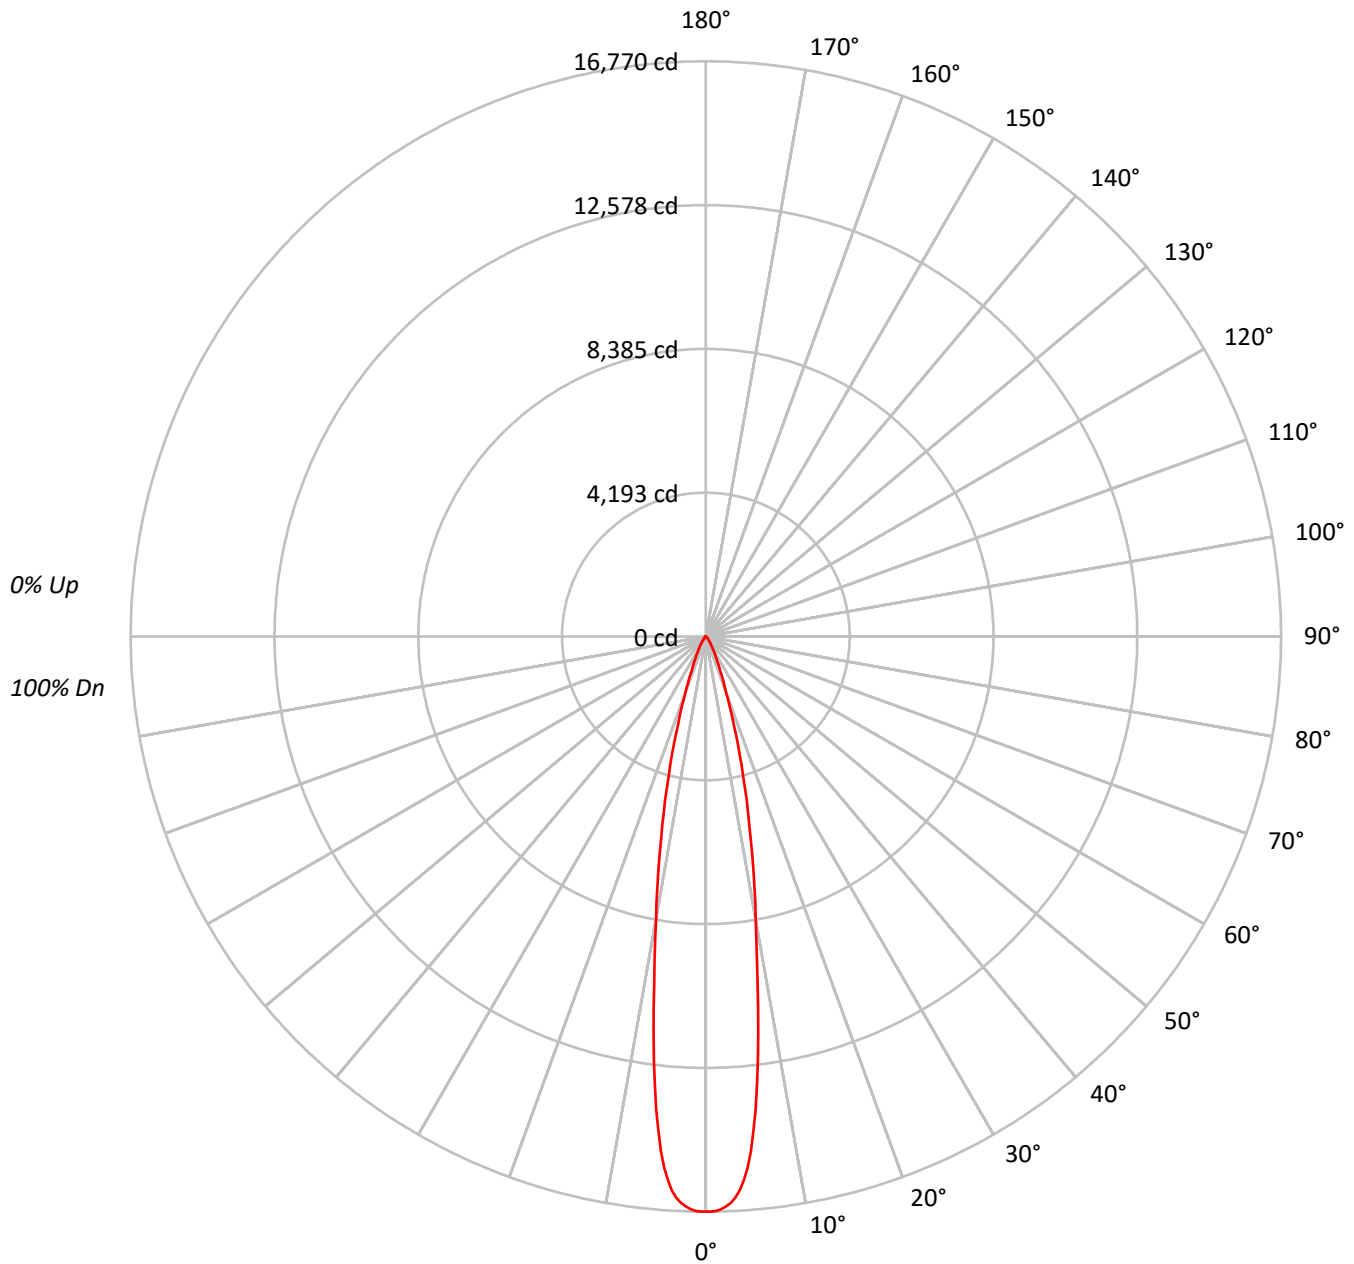

TEST NUMBER: P763883

CATALOG NUMBER: LD6D30D010-EU6DR2015309024-6LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	115	113	111	109		113	111	109	108		107	106	104		103	102	101		100	99	98
2	111	108	105	102		109	106	104	101		103	101	99		100	99	97		98	96	95
3	108	103	100	97		106	102	99	96		100	97	95		97	95	93		95	93	92
4	105	99	96	93		103	98	95	92		96	93	91		95	92	90		93	91	89
5	102	96	92	89		100	95	91	89		94	90	88		92	89	87		91	88	86
6	99	93	89	86		98	92	88	86		91	87	85		90	87	84		88	86	84
7	96	90	86	83		95	89	86	83		88	85	82		87	84	82		86	84	82
8	94	87	83	81		93	87	83	80		86	83	80		85	82	80		84	82	80
9	91	85	81	78		91	85	81	78		84	80	78		83	80	78		82	80	78
10	89	83	79	76		88	82	79	76		82	78	76		81	78	76		81	78	76

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1832325
5°	1653090
10°	927810
15°	471622
20°	199675
25°	92177
30°	48800
35°	26290
40°	14063
45°	8313
50°	4827
55°	2553
60°	1639
65°	1163
70°	479
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 8313 cd/sqm

TEST NUMBER: P763883

CATALOG NUMBER: LD6D30D010-EU6DR2015309024-6LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1194.0	40.5
10°-20°	1175.7	39.9
20°-30°	384.1	13.0
30°-40°	130.8	4.4
40°-50°	44.0	1.5
50°-60°	13.2	0.4
60°-70°	4.4	0.2
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2753.8	93.5
0°-40°	2884.6	97.9
0°-60°	2941.8	99.8
0°-90°	2946.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2946.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	16770	
5°	15072	###
15°	4169	1176
25°	765	384
35°	197	131
45°	54	44
55°	13	13
65°	4	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P763883

CATALOG NUMBER: LD6D30D010-EU6DR2015309024-6LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	16770.2
0.5°	16770.2
1°	16749.2
1.5°	16707.4
2°	16631.3
2.5°	16529.7
3°	16386.4
3.5°	16186.3
4°	15889.1
4.5°	15527.7
5°	15072.2
5.5°	14473.4
6°	13859.6
6.5°	13156.3
7°	12467.9
7.5°	11661.5
8°	10941.7
8.5°	10217.4
9°	9548.4
9.5°	8934.6
10°	8362.7
12.5°	6004.7
15°	4169.4
17.5°	2723.8
20°	1717.3
22.5°	1112.5
25°	764.6
27.5°	537.6
30°	386.8
32.5°	277.8
35°	197.1
37.5°	137.4
40°	98.6
42.5°	71.7
45°	53.8
47.5°	41.8
50°	28.4
52.5°	17.9
55°	13.4
57.5°	10.5
60°	7.5
62.5°	6.0
65°	4.5



TEST NUMBER: P763883

CATALOG NUMBER: LD6D30D010-EU6DR2015309024-6LBS1MW

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







67.5°	3.0
70°	1.5



(END OF REPORT)