

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P763929

Luminaire Tested: LD6D30D010-EU6DR2015309040-6LBDP1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P763929
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D30D010-EU6DR2015309040-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3663.9 lumens
Efficiency: N/A
Efficacy: 126.3 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 29
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P763929

CATALOG NUMBER: LD6D30D010-EU6DR2015309040-6LBDP1H

Luminous Intensity Polar Plot

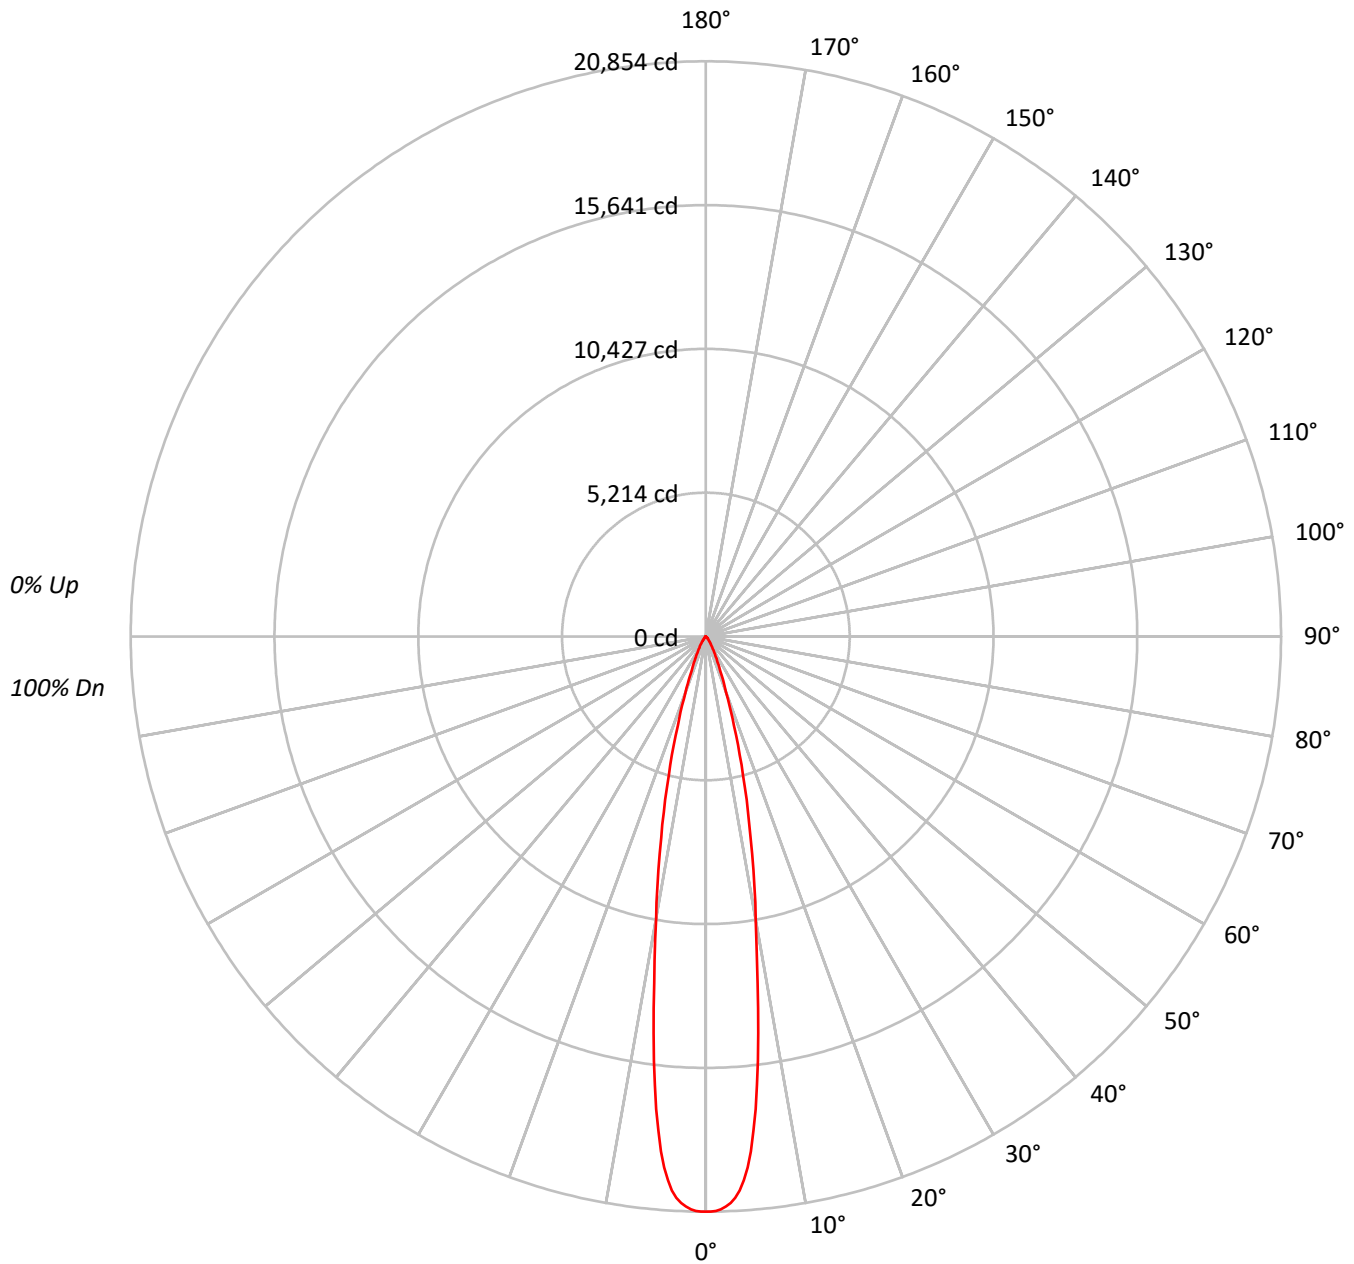



TEST NUMBER: P763929

CATALOG NUMBER: LD6D30D010-EU6DR2015309040-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	109	113	111	109	108	107	106	104		103	102	101		100
2	111	108	105	102	109	106	104	101	103	101	99		100	99	97		98
3	108	103	100	97	106	102	99	96	100	97	95		97	95	93		95
4	105	99	96	93	103	98	95	92	96	93	91		95	92	90		93
5	102	96	92	89	100	95	91	89	94	90	88		92	89	87		91
6	99	93	89	86	98	92	88	86	91	87	85		90	87	84		88
7	96	90	86	83	95	89	86	83	88	85	82		87	84	82		86
8	94	87	83	81	93	87	83	80	86	83	80		85	82	80		84
9	91	85	81	78	91	85	81	78	84	80	78		83	80	78		82
10	89	83	79	76	88	82	79	76	82	78	76		81	78	76		81

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2278480
5°	2055609
10°	1153719
15°	586456
20°	248301
25°	114625
30°	60685
35°	32692
40°	17486
45°	10337
50°	6000
55°	3181
60°	2032
65°	1448
70°	607
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 10337 cd/sqm



TEST NUMBER: P763929

CATALOG NUMBER: LD6D30D010-EU6DR2015309040-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1484.7	40.5
10°-20°	1462.0	39.9
20°-30°	477.6	13.0
30°-40°	162.6	4.4
40°-50°	54.7	1.5
50°-60°	16.5	0.4
60°-70°	5.5	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3424.4	93.5
0°-40°	3587.0	97.9
0°-60°	3658.1	99.8
0°-90°	3663.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3663.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	20854	
5°	18742	###
15°	5185	1462
25°	951	478
35°	245	163
45°	67	55
55°	17	16
65°	6	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P763929

CATALOG NUMBER: LD6D30D010-EU6DR2015309040-6LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	20853.6
0.5°	20853.6
1°	20827.6
1.5°	20775.6
2°	20680.9
2.5°	20554.6
3°	20376.4
3.5°	20127.5
4°	19758.0
4.5°	19308.6
5°	18742.2
5.5°	17997.6
6°	17234.4
6.5°	16359.8
7°	15503.7
7.5°	14501.0
8°	13605.9
8.5°	12705.3
9°	11873.4
9.5°	11110.2
10°	10398.9
12.5°	7466.8
15°	5184.6
17.5°	3387.1
20°	2135.5
22.5°	1383.4
25°	950.8
27.5°	668.5
30°	481.0
32.5°	345.4
35°	245.1
37.5°	170.8
40°	122.6
42.5°	89.1
45°	66.9
47.5°	52.0
50°	35.3
52.5°	22.3
55°	16.7
57.5°	13.0
60°	9.3
62.5°	7.4
65°	5.6



TEST NUMBER: P763929

CATALOG NUMBER: LD6D30D010-EU6DR2015309040-6LBDP1H

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







67.5°	3.7
70°	1.9



(END OF REPORT)