

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P771238

Luminaire Tested: LD6D75BD010-EU6DR4070959030-6LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P771238
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D75BD010-EU6DR4070959030-6LBS1B
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 40° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8804.1 lumens
Efficiency: N/A
Efficacy: 121.6 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P771238

CATALOG NUMBER: LD6D75BD010-EU6DR4070959030-6LBS1B

Luminous Intensity Polar Plot

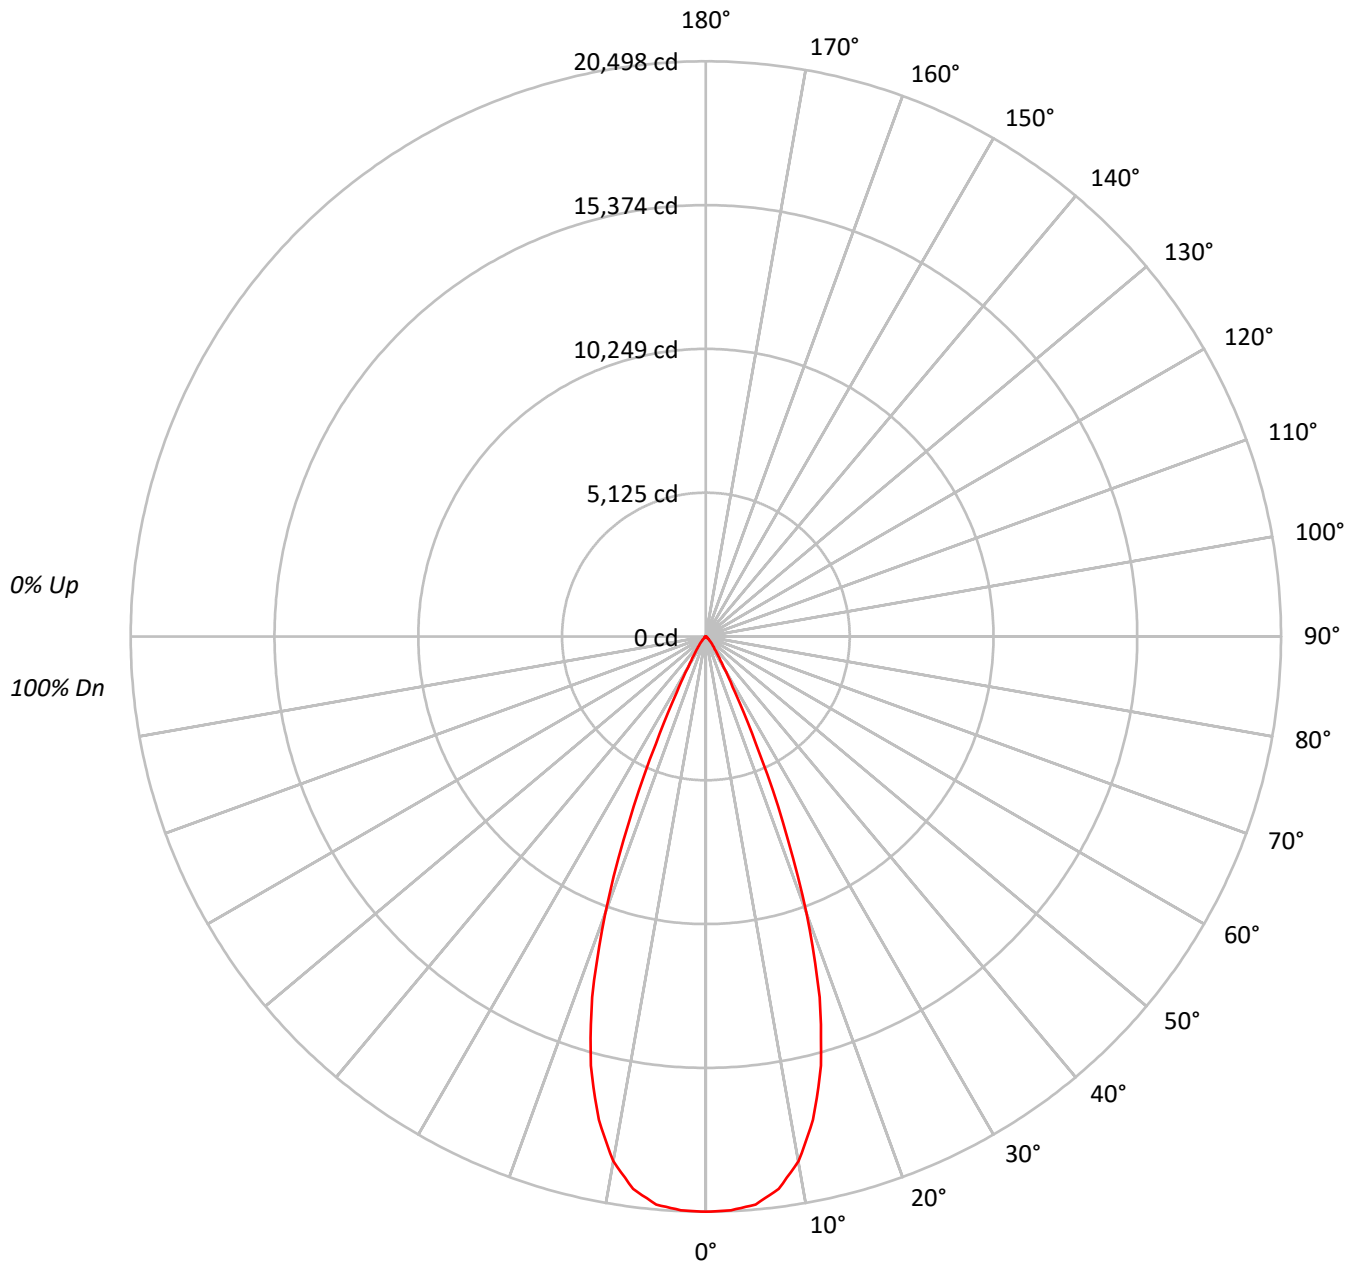



TEST NUMBER: P771238

CATALOG NUMBER: LD6D75BD010-EU6DR4070959030-6LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10		50	30	10			50	30	10			50
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111			106	106	106			102
1	115	112	110	108	112	110	108	107		106	105	103			103	101	100			99
2	110	106	103	100	108	105	102	99		102	99	97			99	97	95			96
3	106	101	97	94	104	100	96	93		97	94	92			95	93	90			93
4	102	97	92	89	101	95	91	88		93	90	87			92	89	86			90
5	99	92	88	84	97	91	87	84		90	86	83			88	85	83			87
6	95	88	84	80	94	88	83	80		86	82	80			85	82	79			84
7	92	85	80	77	91	84	80	77		83	79	76			82	79	76			81
8	89	82	77	74	88	81	77	74		80	76	73			79	76	73			78
9	86	79	74	71	85	78	74	71		77	73	71			76	73	70			76
10	83	76	71	68	82	75	71	68		75	71	68			74	70	68			73

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2239649
5°	2228769
10°	2106670
15°	1790939
20°	1220656
25°	509313
30°	160139
35°	74428
40°	41163
45°	18867
50°	9162
55°	5010
60°	2622
65°	931
70°	383
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 18867 cd/sqm



TEST NUMBER: P771238

CATALOG NUMBER: LD6D75BD010-EU6DR4070959030-6LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1897.5	21.6
10°-20°	4250.8	48.3
20°-30°	2127.8	24.2
30°-40°	390.1	4.4
40°-50°	107.6	1.2
50°-60°	25.3	0.3
60°-70°	4.8	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	8276.2	94.0
0°-40°	8666.2	98.4
0°-60°	8799.1	99.9
0°-90°	8804.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8804.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	20498	
5°	20321	###
15°	15833	4251
25°	4225	2128
35°	558	390
45°	122	108
55°	26	25
65°	4	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P771238

CATALOG NUMBER: LD6D75BD010-EU6DR4070959030-6LBS1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	20498.2
2.5°	20468.3
5°	20321.0
7.5°	19851.6
10°	18988.2
12.5°	17642.3
15°	15832.9
17.5°	13479.9
20°	10498.2
22.5°	7157.3
25°	4224.7
27.5°	2233.3
30°	1269.3
32.5°	820.3
35°	558.0
37.5°	398.8
40°	288.6
42.5°	197.6
45°	122.1
47.5°	77.8
50°	53.9
52.5°	38.3
55°	26.3
57.5°	16.8
60°	12.0
62.5°	7.2
65°	3.6
67.5°	2.4
70°	1.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)