

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P771318

Luminaire Tested: LD6D75BD010-EU6DR4570959030-6LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P771318
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D75BD010-EU6DR4570959030-6LBS1LI
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9657.5 lumens
Efficiency: N/A
Efficacy: 133.4 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P771318

CATALOG NUMBER: LD6D75BD010-EU6DR4570959030-6LBS1LI

Luminous Intensity Polar Plot

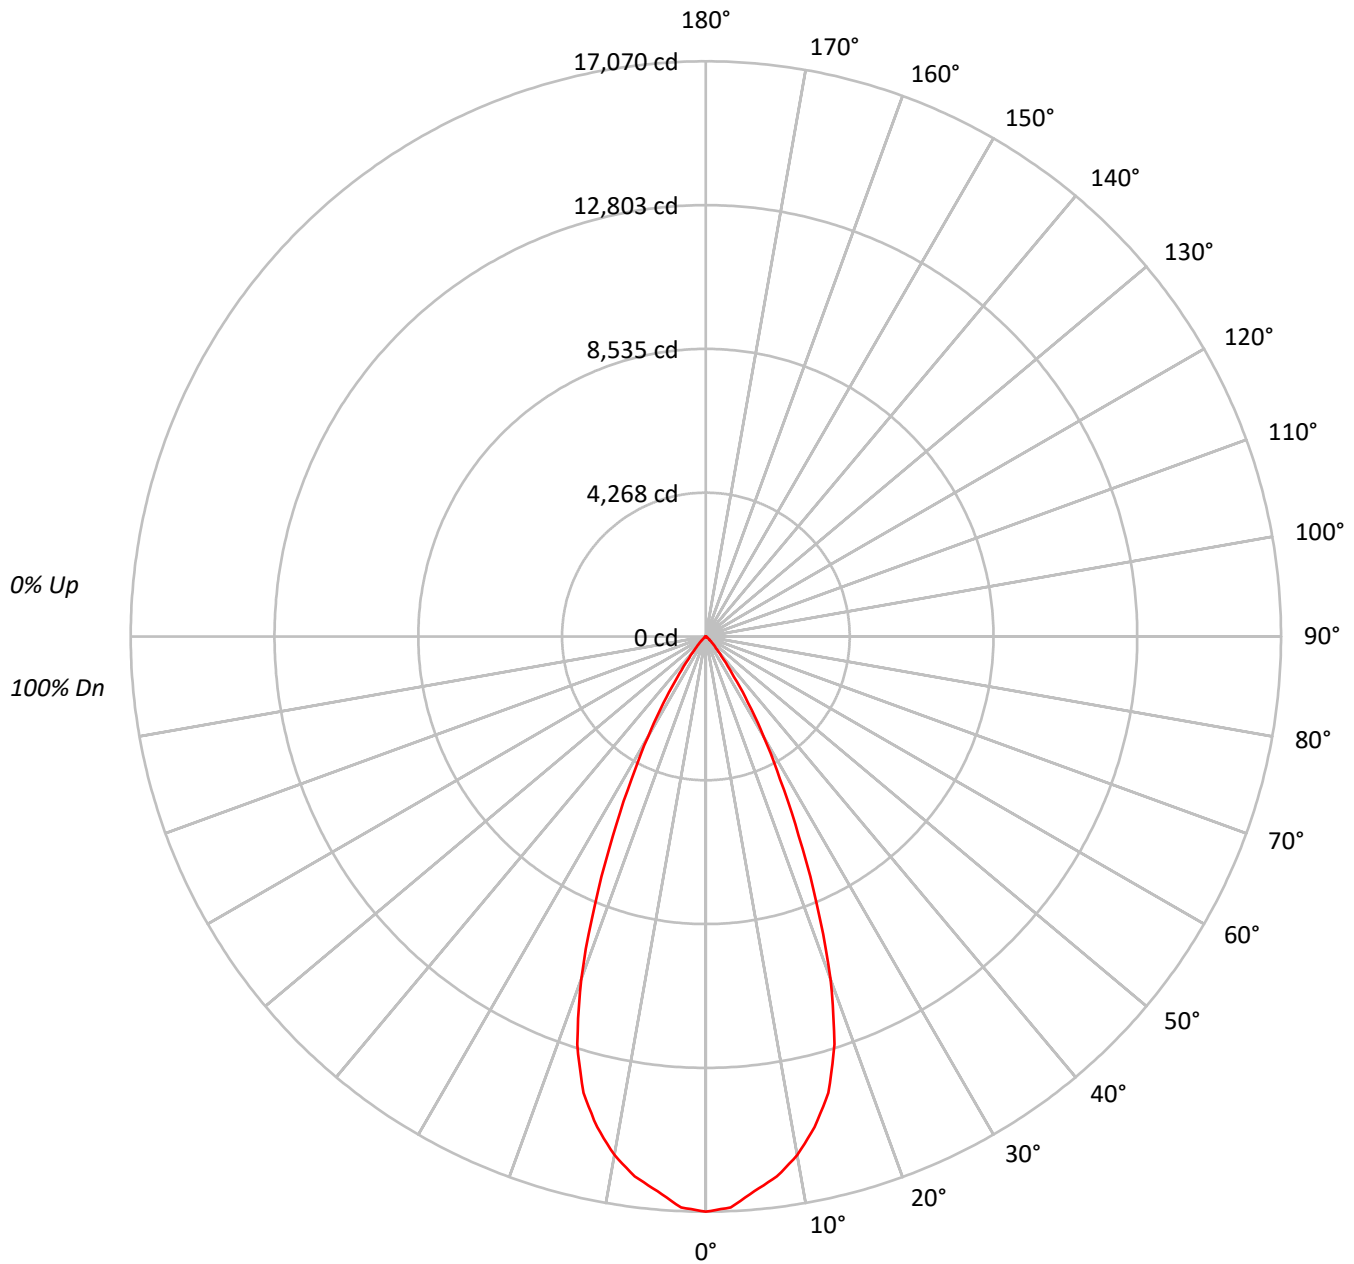

TEST NUMBER: P771318

CATALOG NUMBER: LD6D75BD010-EU6DR4570959030-6LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95		
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90		
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85		
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81		
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77		
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73		
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69		
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66		
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63		
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1865070
5°	1811970
10°	1733558
15°	1586574
20°	1258700
25°	785832
30°	433119
35°	194485
40°	76592
45°	36095
50°	17117
55°	8953
60°	4392
65°	1034
70°	415
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 36095 cd/sqm



TEST NUMBER: P771318

CATALOG NUMBER: LD6D75BD010-EU6DR4570959030-6LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1552.3	16.1
10°-20°	3820.4	39.6
20°-30°	3025.3	31.3
30°-40°	1007.5	10.4
40°-50°	199.9	2.1
50°-60°	45.4	0.5
60°-70°	6.5	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	8398.0	87.0
0°-40°	9405.5	97.4
0°-60°	9650.8	99.9
0°-90°	9657.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9657.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	17070	
5°	16521	###
15°	14026	3820
25°	6518	3025
35°	1458	1007
45°	234	200
55°	47	45
65°	4	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P771318

CATALOG NUMBER: LD6D75BD010-EU6DR4570959030-6LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	17069.9
2.5°	16958.5
5°	16520.8
7.5°	16159.6
10°	15625.2
12.5°	14913.7
15°	14026.2
17.5°	12691.7
20°	10825.4
22.5°	8602.1
25°	6518.4
27.5°	4773.0
30°	3433.0
32.5°	2334.8
35°	1458.1
37.5°	864.6
40°	537.0
42.5°	353.1
45°	233.6
47.5°	150.4
50°	100.7
52.5°	67.1
55°	47.0
57.5°	30.9
60°	20.1
62.5°	10.7
65°	4.0
67.5°	1.3
70°	1.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)