

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772489

Luminaire Tested: LD6D80BD010-EU6DR7070959030-6LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P772489
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D80BD010-EU6DR7070959030-6LBS1MW
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9752.0 lumens
Efficiency: N/A
Efficacy: 123.6 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 78.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P772489

CATALOG NUMBER: LD6D80BD010-EU6DR7070959030-6LBS1MW

Luminous Intensity Polar Plot

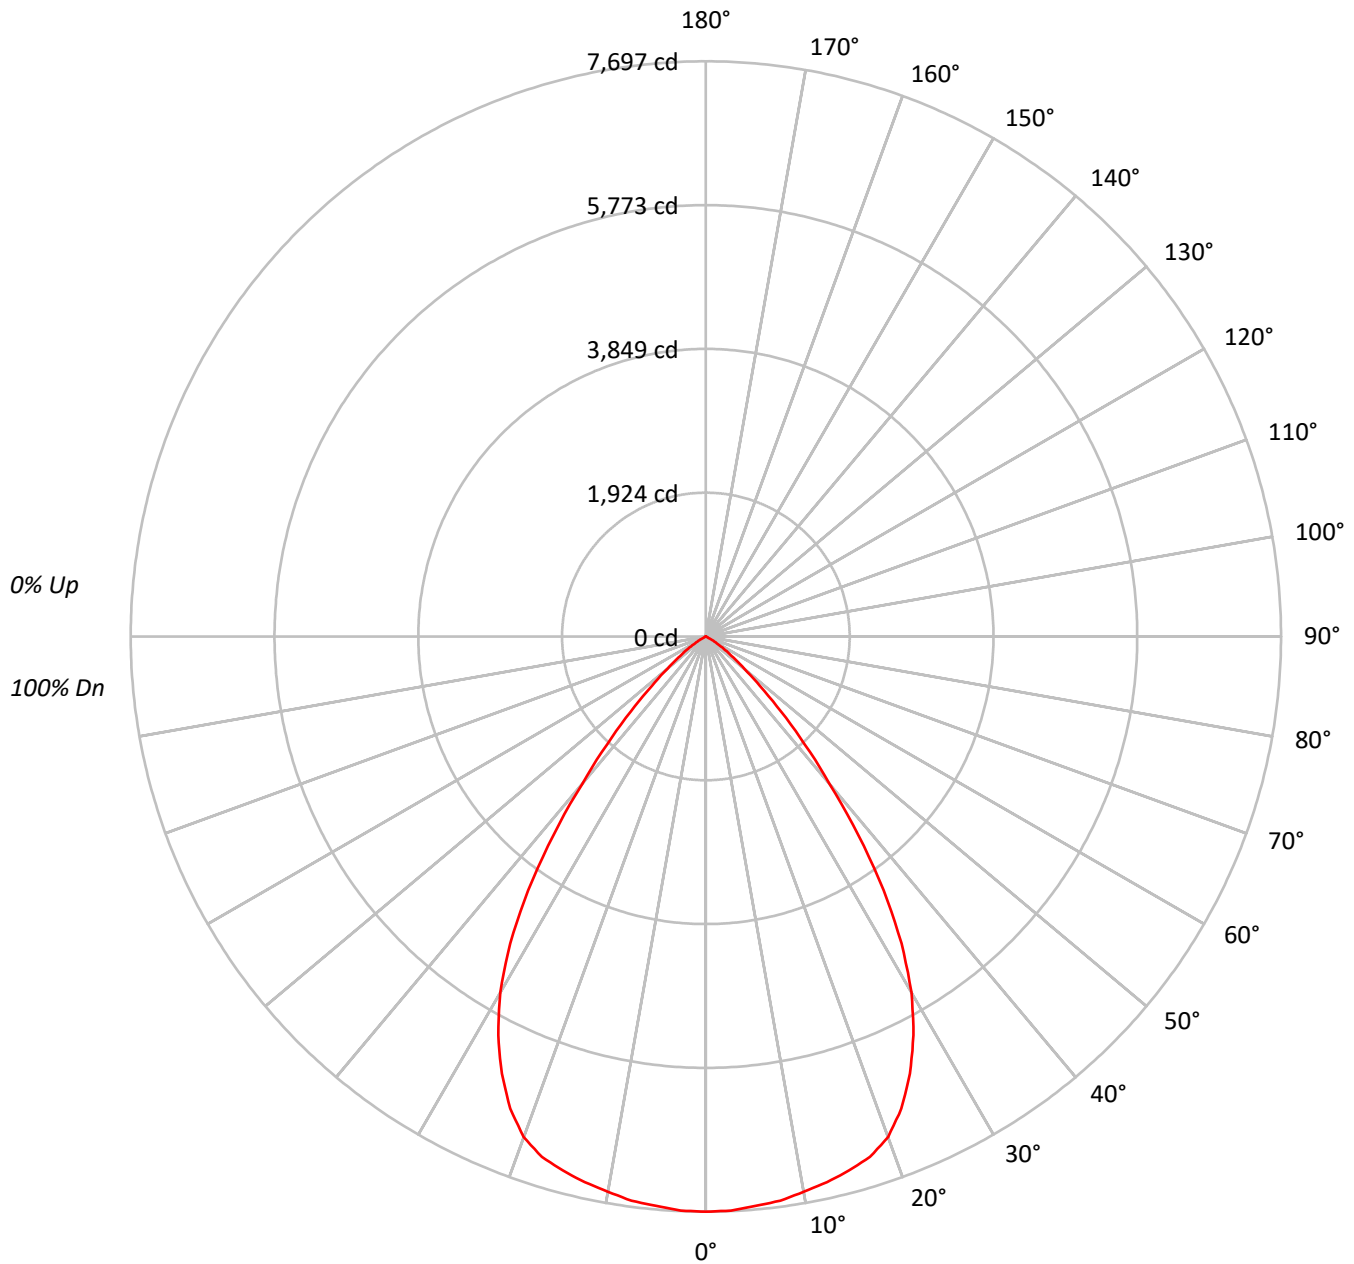



TEST NUMBER: P772489

CATALOG NUMBER: LD6D80BD010-EU6DR7070959030-6LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93		
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85		
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78		
4	95	87	81	76	93	86	80	76	83	78	75	81	77	74	79	76	73	71		
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65		
6	84	75	68	63	83	74	68	63	72	67	63	71	66	62	69	65	62	60		
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	61	57	56		
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51		
9	71	61	54	50	70	60	54	50	59	53	50	58	53	49	57	53	49	48		
10	67	57	50	46	66	56	50	46	55	50	46	55	50	46	54	49	46	44		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	840991
5°	838884
10°	837067
15°	836836
20°	828653
25°	778417
30°	693962
35°	553298
40°	367386
45°	219647
50°	113869
55°	59852
60°	21175
65°	362
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 219647 cd/sqm



TEST NUMBER: P772489

CATALOG NUMBER: LD6D80BD010-EU6DR7070959030-6LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	727.4	7.5
10°-20°	2086.1	21.4
20°-30°	2942.9	30.2
30°-40°	2540.5	26.1
40°-50°	1137.7	11.7
50°-60°	297.8	3.1
60°-70°	19.4	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5756.5	59.0
0°-40°	8297.0	85.1
0°-60°	9732.5	99.8
0°-90°	9752.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9752.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7697	
5°	7649	727
15°	7398	2086
25°	6457	2943
35°	4148	2541
45°	1422	1138
55°	314	298
65°	1	19
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P772489

CATALOG NUMBER: LD6D80BD010-EU6DR7070959030-6LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	7697.1
2.5°	7688.8
5°	7648.6
7.5°	7615.4
10°	7544.8
12.5°	7481.2
15°	7398.1
17.5°	7302.6
20°	7126.8
22.5°	6837.5
25°	6456.9
27.5°	6015.4
30°	5500.5
32.5°	4870.7
35°	4148.2
37.5°	3351.0
40°	2575.8
42.5°	1957.1
45°	1421.5
47.5°	980.0
50°	669.9
52.5°	462.3
55°	314.2
57.5°	189.6
60°	96.9
62.5°	30.5
65°	1.4
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)