

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P774484

Luminaire Tested: LD6D95BD010-EU6DR5070959024-6LBDP1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P774484
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D95BD010-EU6DR5070959024-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8862.1 lumens
Efficiency: N/A
Efficacy: 89.3 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 99.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P774484

CATALOG NUMBER: LD6D95BD010-EU6DR5070959024-6LBDP1B

Luminous Intensity Polar Plot

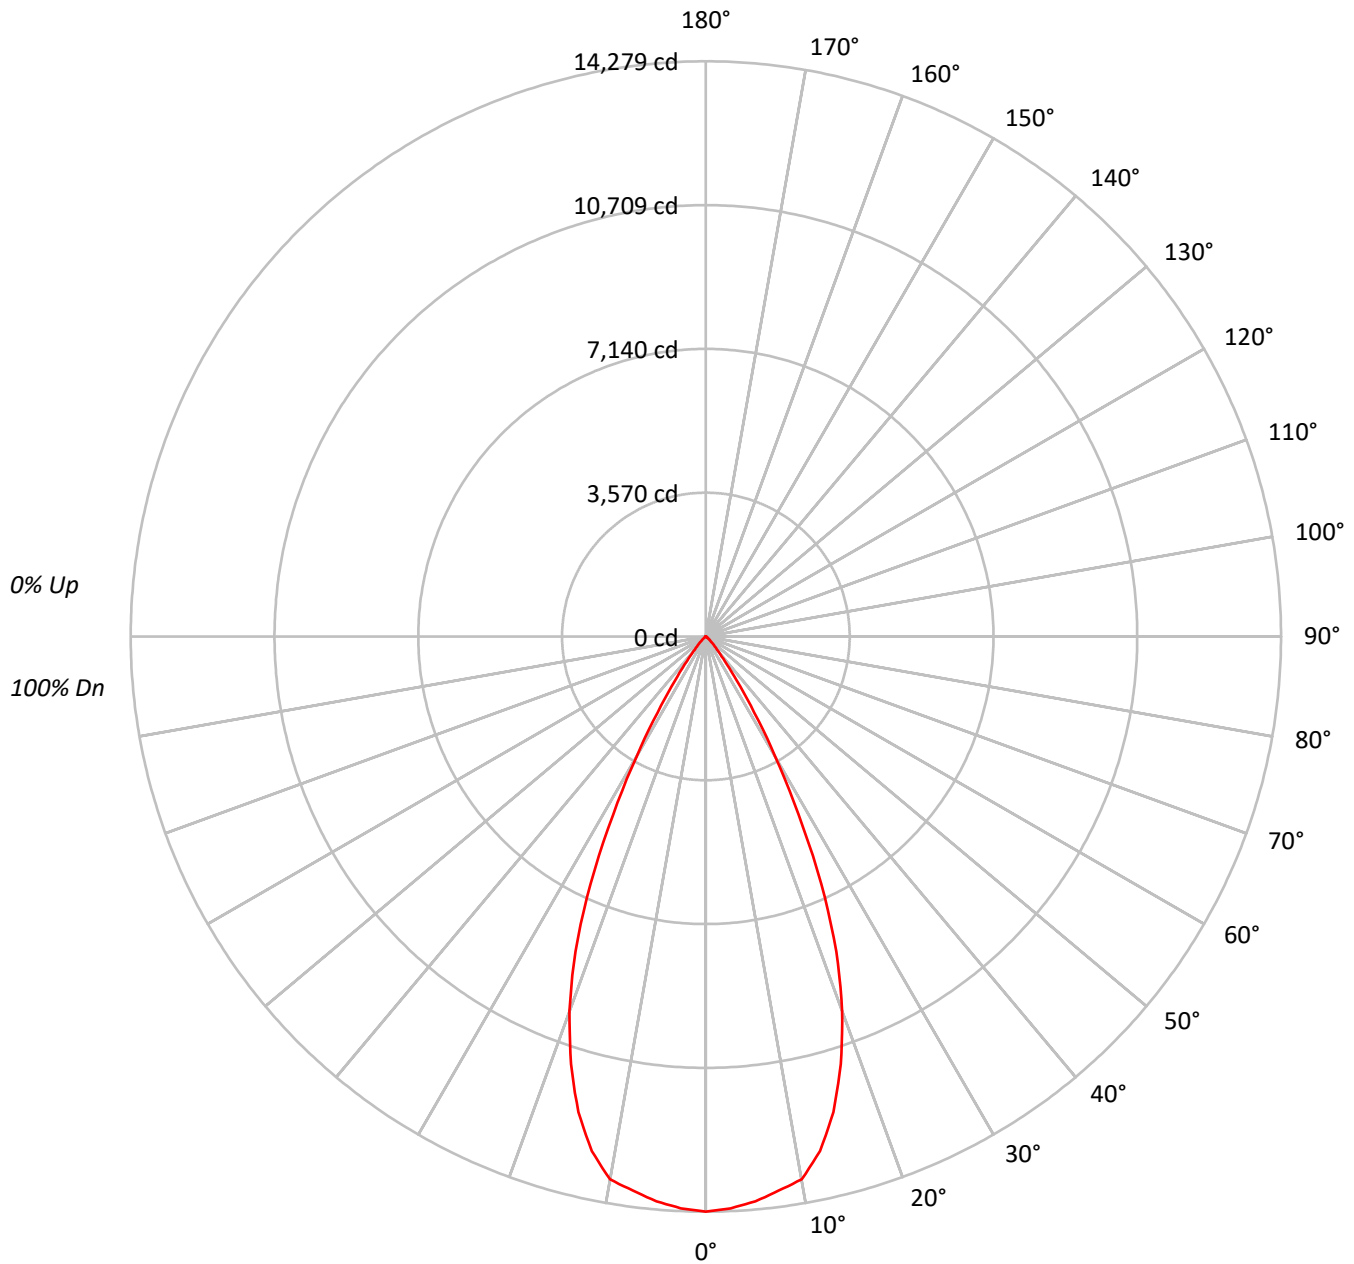



TEST NUMBER: P774484

CATALOG NUMBER: LD6D95BD010-EU6DR5070959024-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	110	108	106	106	104	102		102	101	99		98
2	109	105	101	98	107	103	100	97	100	98	95		97	95	93		95
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	90	87	84		89	85	83		87
5	96	89	84	80	95	88	83	79	86	82	79		85	81	78		83
6	92	84	79	75	91	83	79	75	82	78	74		81	77	74		79
7	88	80	75	71	87	79	74	71	78	74	71		77	73	70		76
8	85	76	71	67	84	76	71	67	75	70	67		74	70	67		73
9	81	73	68	64	80	72	67	64	71	67	64		71	67	64		70
10	78	70	64	61	77	69	64	61	68	64	61		68	64	61		67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1560145
5°	1543785
10°	1518366
15°	1382594
20°	1150474
25°	816670
30°	432261
35°	176145
40°	65424
45°	29946
50°	12273
55°	6420
60°	3147
65°	931
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 29946 cd/sqm



TEST NUMBER: P774484

CATALOG NUMBER: LD6D95BD010-EU6DR5070959024-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1330.4	15.0
10°-20°	3362.3	37.9
20°-30°	3020.2	34.1
30°-40°	945.6	10.7
40°-50°	165.6	1.9
50°-60°	33.0	0.4
60°-70°	5.0	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	7712.9	87.0
0°-40°	8658.5	97.7
0°-60°	8857.1	99.9
0°-90°	8862.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8862.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	14279	
5°	14076	###
15°	12223	3362
25°	6774	3020
35°	1321	946
45°	194	166
55°	34	33
65°	4	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P774484

CATALOG NUMBER: LD6D95BD010-EU6DR5070959024-6LBDP1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	14279.1
2.5°	14208.1
5°	14075.6
7.5°	13873.4
10°	13685.6
12.5°	13083.6
15°	12222.9
17.5°	11129.8
20°	9894.6
22.5°	8465.6
25°	6774.2
27.5°	4980.4
30°	3426.2
32.5°	2230.8
35°	1320.6
37.5°	758.4
40°	458.7
42.5°	298.6
45°	193.8
47.5°	118.0
50°	72.2
52.5°	49.4
55°	33.7
57.5°	22.9
60°	14.4
62.5°	8.4
65°	3.6
67.5°	1.2
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)