

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P774486

Luminaire Tested: LD6D95BD010-EU6DR5070959024-6LBDP1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P774486
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D95BD010-EU6DR5070959024-6LBDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10435.3 lumens
Efficiency: N/A
Efficacy: 105.2 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 99.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P774486

CATALOG NUMBER: LD6D95BD010-EU6DR5070959024-6LBDP1LI

Luminous Intensity Polar Plot

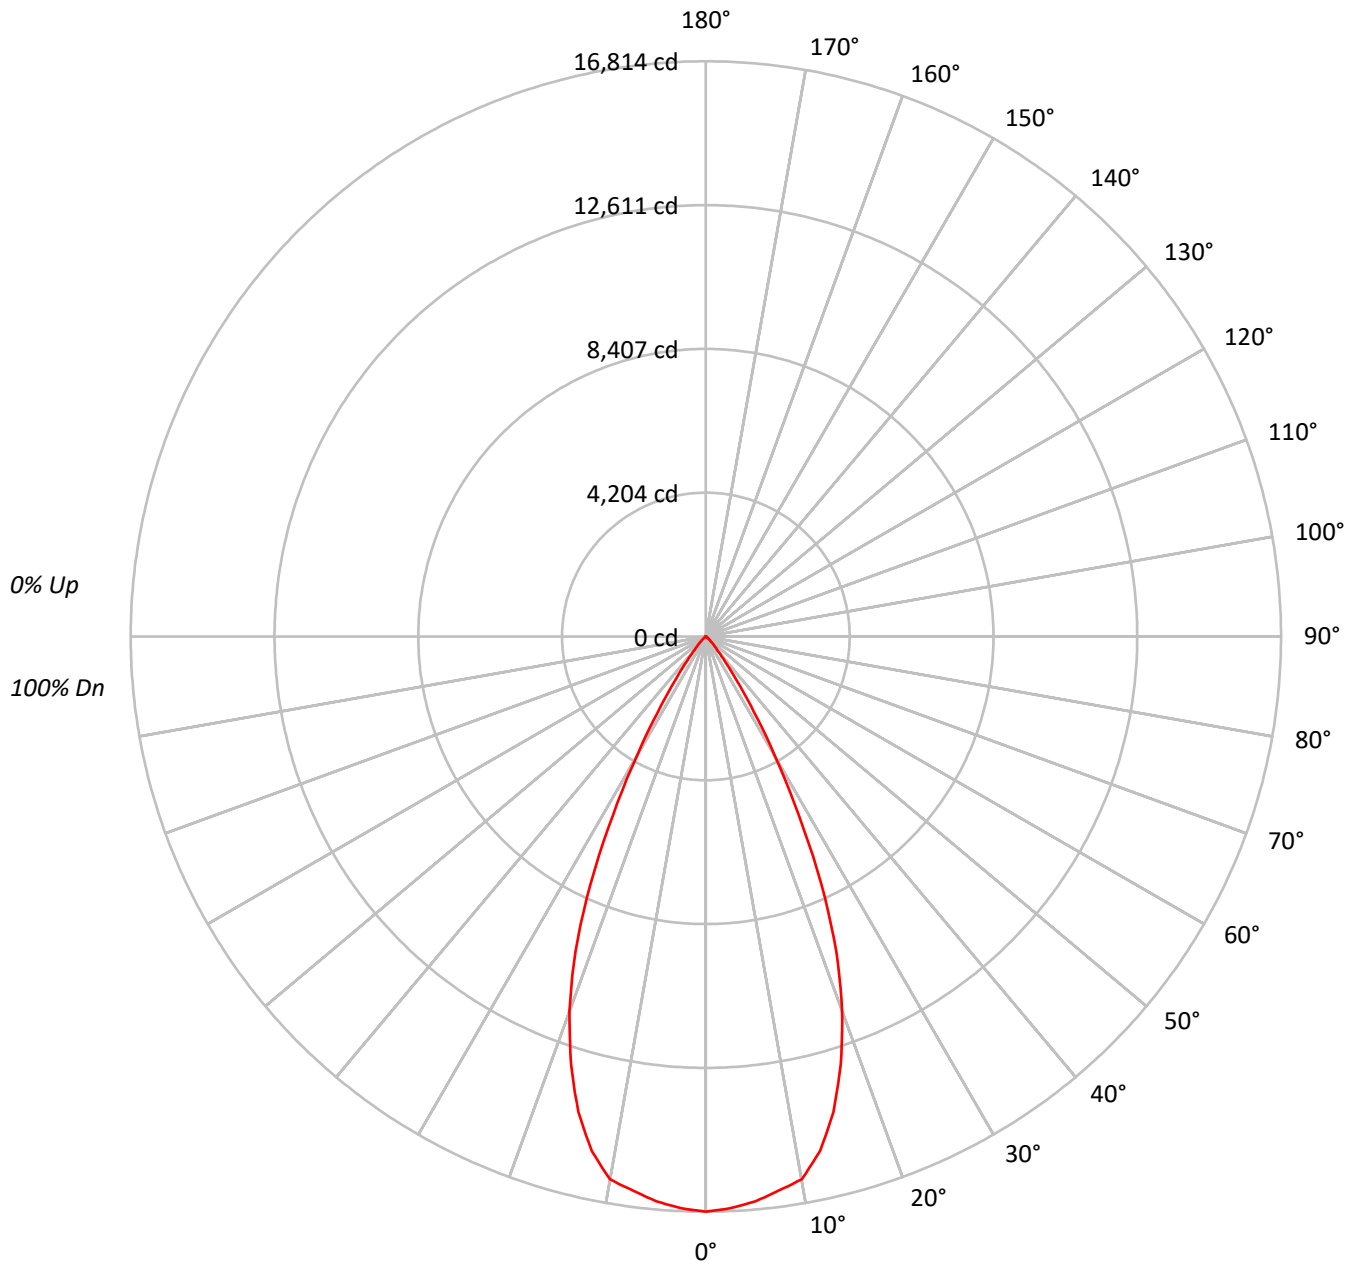



TEST NUMBER: P774486

CATALOG NUMBER: LD6D95BD010-EU6DR5070959024-6LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	110	108	106	106	104	102		102	101	99		98
2	109	105	101	98	107	103	100	97	100	98	95		97	95	93		95
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	90	87	84		89	85	83		87
5	96	89	84	80	95	88	83	79	86	82	79		85	81	78		83
6	92	84	79	75	91	83	79	75	82	78	74		81	77	74		79
7	88	80	75	71	87	79	74	71	78	74	71		77	73	70		76
8	85	76	71	67	84	76	71	67	75	70	67		74	70	67		73
9	81	73	68	64	80	72	67	64	71	67	64		71	67	64		70
10	78	70	64	61	77	69	64	61	68	64	61		68	64	61		67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1837088
5°	1817838
10°	1787899
15°	1628020
20°	1354695
25°	961638
30°	508994
35°	207424
40°	77034
45°	35261
50°	14465
55°	7562
60°	3715
65°	1112
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 35261 cd/sqm



TEST NUMBER: P774486

CATALOG NUMBER: LD6D95BD010-EU6DR5070959024-6LBPD1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1566.6	15.0
10°-20°	3959.1	37.9
20°-30°	3556.4	34.1
30°-40°	1113.5	10.7
40°-50°	195.0	1.9
50°-60°	38.9	0.4
60°-70°	5.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9082.1	87.0
0°-40°	10195.6	97.7
0°-60°	10429.4	99.9
0°-90°	10435.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	10435.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	16814	
5°	16574	###
15°	14393	3959
25°	7977	3556
35°	1555	1113
45°	228	195
55°	40	39
65°	4	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P774486

CATALOG NUMBER: LD6D95BD010-EU6DR5070959024-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	16813.8
2.5°	16730.2
5°	16574.3
7.5°	16336.1
10°	16115.0
12.5°	15406.2
15°	14392.6
17.5°	13105.5
20°	11651.0
22.5°	9968.4
25°	7976.7
27.5°	5864.5
30°	4034.4
32.5°	2626.8
35°	1555.1
37.5°	893.1
40°	540.1
42.5°	351.6
45°	228.2
47.5°	138.9
50°	85.1
52.5°	58.1
55°	39.7
57.5°	26.9
60°	17.0
62.5°	9.9
65°	4.3
67.5°	1.4
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)