

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P774504

Luminaire Tested: LD6D95BD010-EU6DR5070959027-6LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P774504
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D95BD010-EU6DR5070959027-6LBS1MW
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11257.5 lumens
Efficiency: N/A
Efficacy: 113.5 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 99.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P774504

CATALOG NUMBER: LD6D95BD010-EU6DR5070959027-6LBS1MW

Luminous Intensity Polar Plot

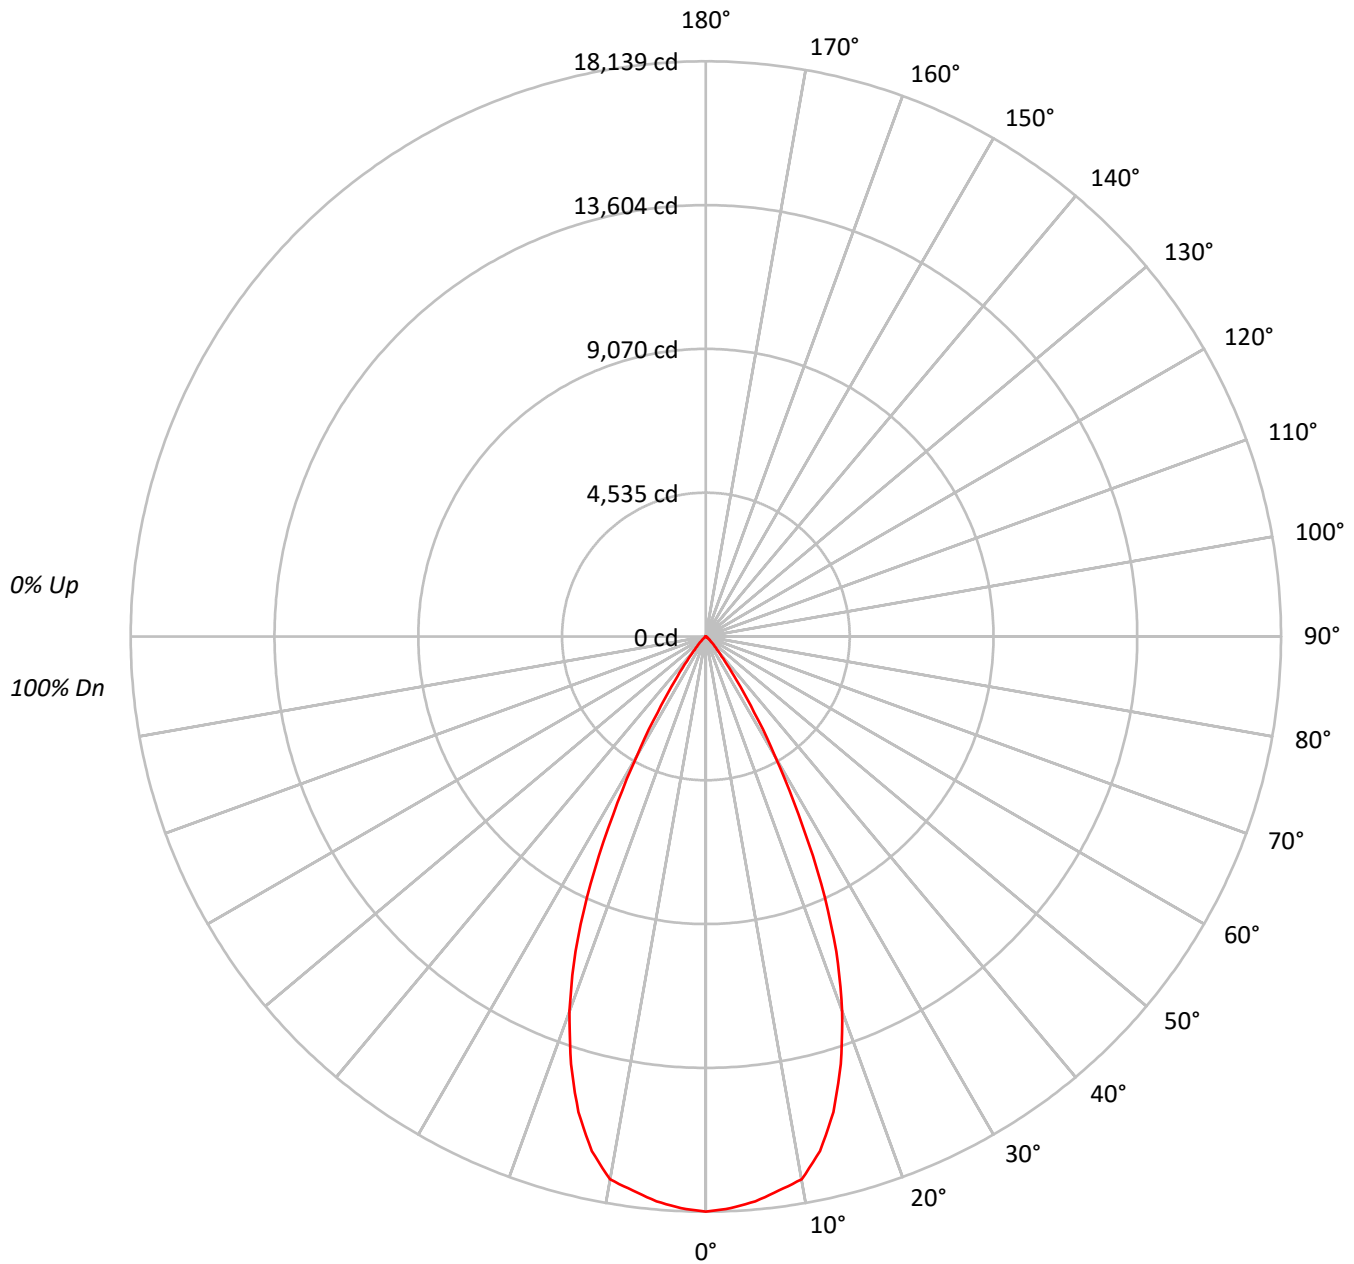



TEST NUMBER: P774504

CATALOG NUMBER: LD6D95BD010-EU6DR5070959027-6LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	109	107		112	110	108	106		106	104	102		102	101	99		98	97	97
2	109	105	101	98		107	103	100	97		100	98	95		97	95	93		95	93	91
3	105	99	95	91		103	98	94	90		95	92	89		93	90	88		91	88	86
4	100	94	89	85		99	93	88	85		90	87	84		89	85	83		87	84	82
5	96	89	84	80		95	88	83	79		86	82	79		85	81	78		83	80	77
6	92	84	79	75		91	83	79	75		82	78	74		81	77	74		79	76	74
7	88	80	75	71		87	79	74	71		78	74	71		77	73	70		76	73	70
8	85	76	71	67		84	76	71	67		75	70	67		74	70	67		73	69	66
9	81	73	68	64		80	72	67	64		71	67	64		71	67	64		70	66	63
10	78	70	64	61		77	69	64	61		68	64	61		68	64	61		67	63	60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1981848
5°	1961067
10°	1928768
15°	1756304
20°	1461445
25°	1037408
30°	549101
35°	223763
40°	83110
45°	38042
50°	15604
55°	8153
60°	4021
65°	1189
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 38042 cd/sqm



TEST NUMBER: P774504

CATALOG NUMBER: LD6D95BD010-EU6DR5070959027-6LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1690.0	15.0
10°-20°	4271.1	37.9
20°-30°	3836.6	34.1
30°-40°	1201.2	10.7
40°-50°	210.4	1.9
50°-60°	41.9	0.4
60°-70°	6.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9797.7	87.0
0°-40°	10998.9	97.7
0°-60°	11251.2	99.9
0°-90°	11257.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	11257.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	18139	
5°	17880	###
15°	15527	4271
25°	8605	3837
35°	1678	1201
45°	246	210
55°	43	42
65°	5	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P774504

CATALOG NUMBER: LD6D95BD010-EU6DR5070959027-6LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	18138.7
2.5°	18048.4
5°	17880.2
7.5°	17623.3
10°	17384.7
12.5°	16620.1
15°	15526.7
17.5°	14138.1
20°	12569.1
22.5°	10753.8
25°	8605.2
27.5°	6326.6
30°	4352.3
32.5°	2833.7
35°	1677.6
37.5°	963.4
40°	582.7
42.5°	379.3
45°	246.2
47.5°	149.9
50°	91.8
52.5°	62.7
55°	42.8
57.5°	29.1
60°	18.4
62.5°	10.7
65°	4.6
67.5°	1.5
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)