

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P774435

Luminaire Tested: LD6D95BD010-EU6DR4570959030-6LBDP1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P774435
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D95BD010-EU6DR4570959030-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10836.5 lumens
Efficiency: N/A
Efficacy: 109.2 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 99.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P774435

CATALOG NUMBER: LD6D95BD010-EU6DR4570959030-6LBDP1MW

Luminous Intensity Polar Plot

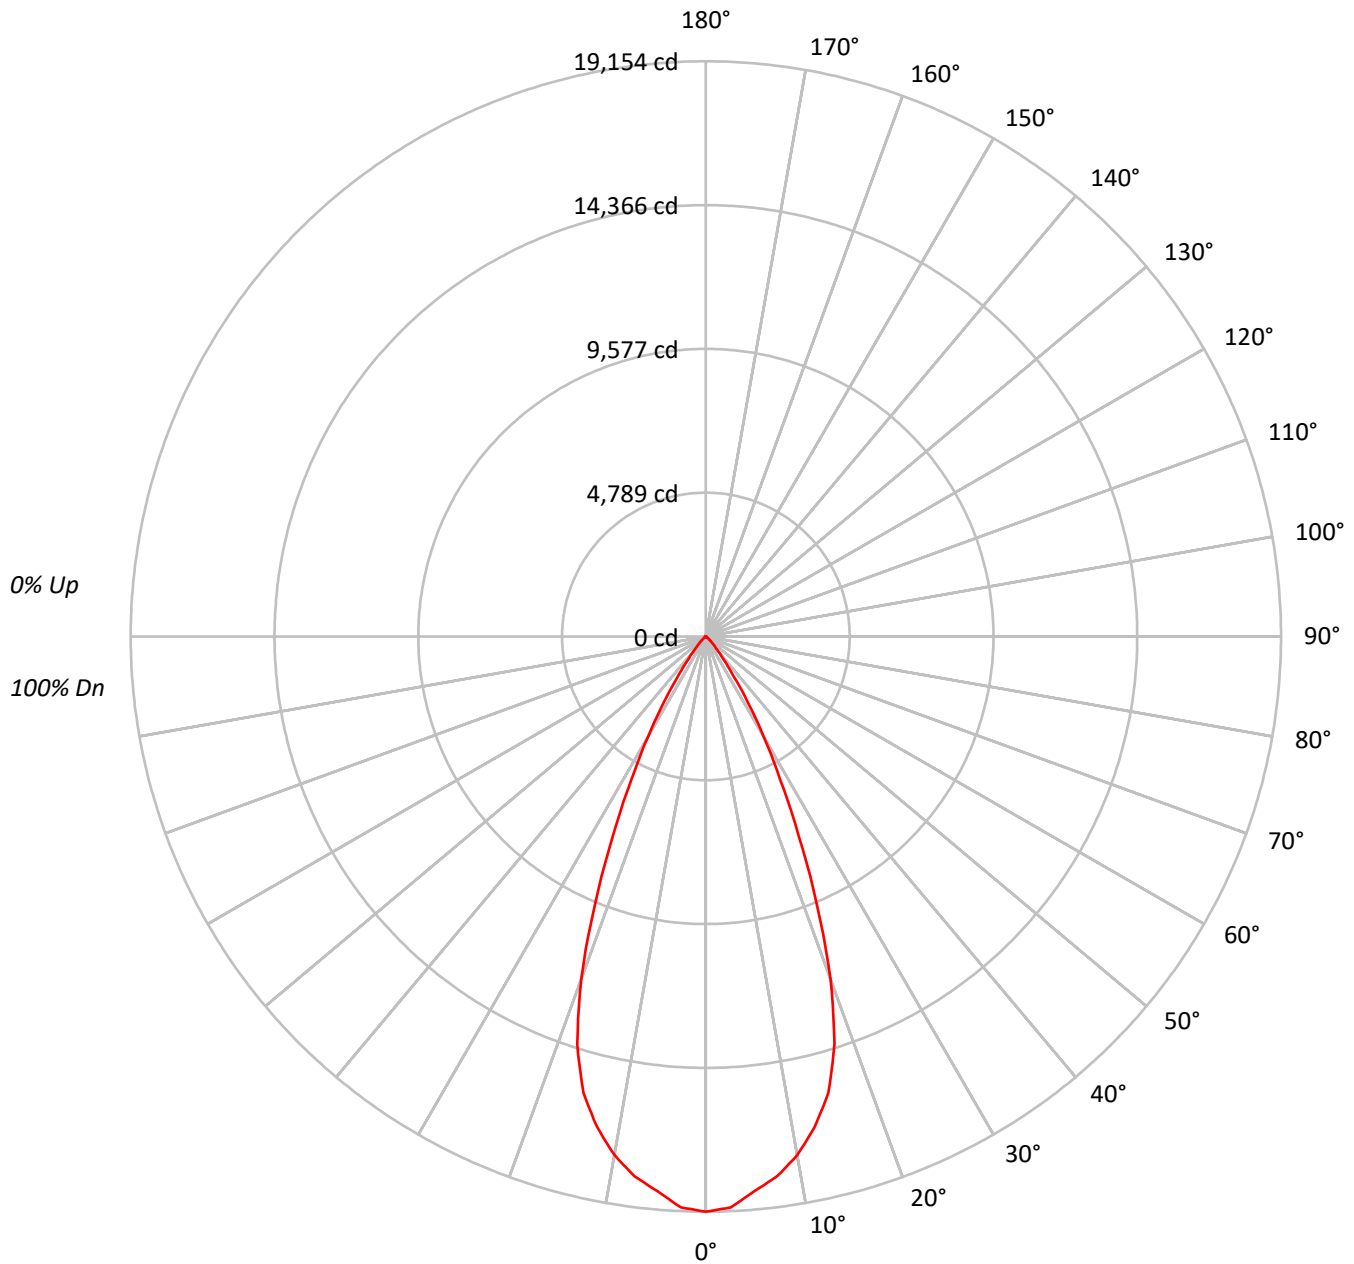

TEST NUMBER: P774435

CATALOG NUMBER: LD6D95BD010-EU6DR4570959030-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		98
2	109	105	102	99	107	103	100	98	100	98	95		97	95	93		95
3	105	99	95	91	103	98	94	91	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	91	87	84		89	86	83		87
5	96	89	84	80	95	88	83	80	86	82	79		85	81	79		83
6	92	85	80	76	91	84	79	76	83	78	75		81	77	75		80
7	89	81	75	72	87	80	75	72	79	74	71		78	74	71		77
8	85	77	72	68	84	76	71	68	75	71	68		74	70	67		73
9	82	73	68	65	81	73	68	65	72	68	65		71	67	64		71
10	79	70	65	62	78	70	65	62	69	65	62		68	64	61		68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2092759
5°	2033180
10°	1945199
15°	1780273
20°	1412367
25°	881758
30°	486007
35°	218228
40°	85949
45°	40499
50°	19208
55°	10039
60°	4939
65°	1163
70°	479
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 40499 cd/sqm



TEST NUMBER: P774435

CATALOG NUMBER: LD6D95BD010-EU6DR4570959030-6LBPD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1741.8	16.1
10°-20°	4286.8	39.6
20°-30°	3394.7	31.3
30°-40°	1130.5	10.4
40°-50°	224.3	2.1
50°-60°	50.9	0.5
60°-70°	7.3	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9423.2	87.0
0°-40°	10553.7	97.4
0°-60°	10829.0	99.9
0°-90°	10836.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	10836.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	19154	
5°	18538	###
15°	15739	4287
25°	7314	3395
35°	1636	1130
45°	262	224
55°	53	51
65°	4	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P774435

CATALOG NUMBER: LD6D95BD010-EU6DR4570959030-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	19153.8
2.5°	19028.8
5°	18537.7
7.5°	18132.4
10°	17532.8
12.5°	16734.4
15°	15738.6
17.5°	14241.1
20°	12147.0
22.5°	9652.2
25°	7314.1
27.5°	5355.7
30°	3852.2
32.5°	2619.8
35°	1636.1
37.5°	970.2
40°	602.6
42.5°	396.2
45°	262.1
47.5°	168.7
50°	113.0
52.5°	75.3
55°	52.7
57.5°	34.6
60°	22.6
62.5°	12.1
65°	4.5
67.5°	1.5
70°	1.5
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)