

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P774517

Luminaire Tested: LD6D95BD010-EU6DR5070959030-6LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P774517
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D95BD010-EU6DR5070959030-6LBS1MW
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11597.7 lumens
Efficiency: N/A
Efficacy: 116.9 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 99.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P774517

CATALOG NUMBER: LD6D95BD010-EU6DR5070959030-6LBS1MW

Luminous Intensity Polar Plot

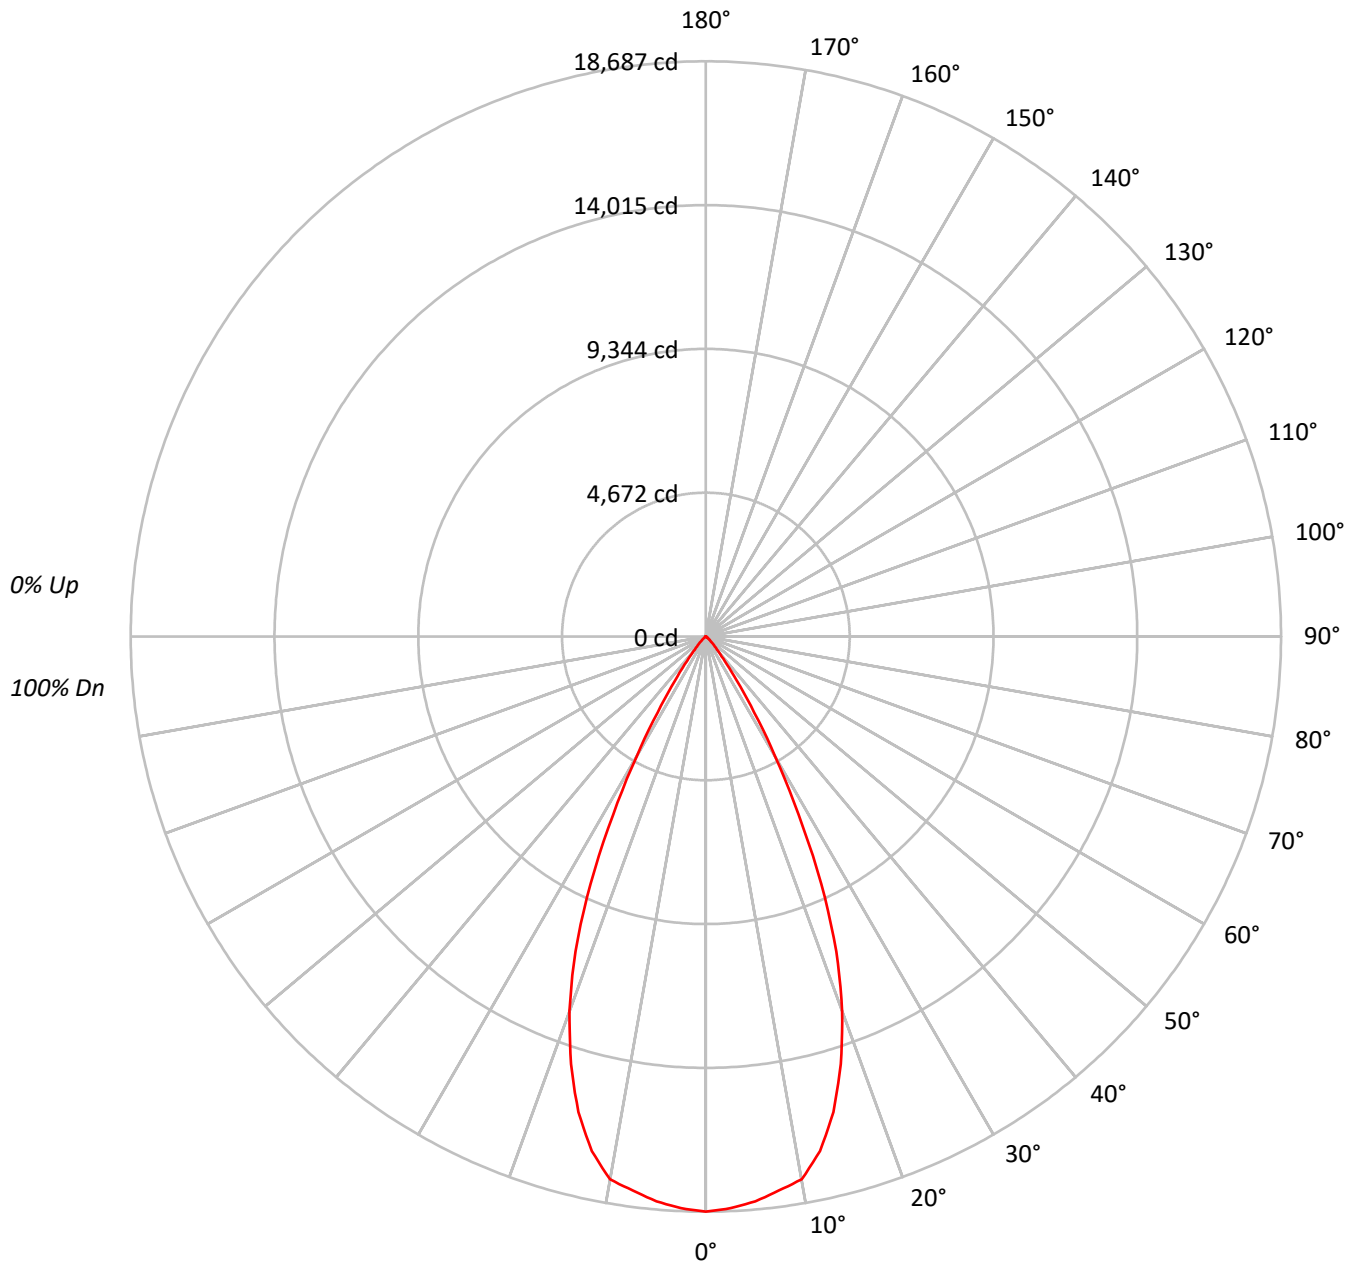



TEST NUMBER: P774517

CATALOG NUMBER: LD6D95BD010-EU6DR5070959030-6LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	109	107		112	110	108	106		106	104	102		102	101	99		98	97	97
2	109	105	101	98		107	103	100	97		100	98	95		97	95	93		95	93	91
3	105	99	95	91		103	98	94	90		95	92	89		93	90	88		91	88	86
4	100	94	89	85		99	93	88	85		90	87	84		89	85	83		87	84	82
5	96	89	84	80		95	88	83	79		86	82	79		85	81	78		83	80	77
6	92	84	79	75		91	83	79	75		82	78	74		81	77	74		79	76	74
7	88	80	75	71		87	79	74	71		78	74	71		77	73	70		76	73	70
8	85	76	71	67		84	76	71	67		75	70	67		74	70	67		73	69	66
9	81	73	68	64		80	72	67	64		71	67	64		71	67	64		70	66	63
10	78	70	64	61		77	69	64	61		68	64	61		68	64	61		67	63	60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2041734
5°	2020326
10°	1987059
15°	1809377
20°	1505606
25°	1068752
30°	565692
35°	230525
40°	85621
45°	39201
50°	16063
55°	8401
60°	4130
65°	1215
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 39201 cd/sqm



TEST NUMBER: P774517

CATALOG NUMBER: LD6D95BD010-EU6DR5070959030-6LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1741.1	15.0
10°-20°	4400.2	37.9
20°-30°	3952.5	34.1
30°-40°	1237.5	10.7
40°-50°	216.7	1.9
50°-60°	43.2	0.4
60°-70°	6.5	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	10093.8	87.0
0°-40°	11331.3	97.7
0°-60°	11591.2	99.9
0°-90°	11597.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	11597.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	18687	
5°	18420	###
15°	15996	4400
25°	8865	3953
35°	1728	1238
45°	254	217
55°	44	43
65°	5	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P774517

CATALOG NUMBER: LD6D95BD010-EU6DR5070959030-6LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	18686.8
2.5°	18593.9
5°	18420.5
7.5°	18155.9
10°	17910.1
12.5°	17122.4
15°	15995.9
17.5°	14565.3
20°	12948.9
22.5°	11078.8
25°	8865.2
27.5°	6517.8
30°	4483.8
32.5°	2919.4
35°	1728.3
37.5°	992.6
40°	600.3
42.5°	390.7
45°	253.7
47.5°	154.4
50°	94.5
52.5°	64.6
55°	44.1
57.5°	29.9
60°	18.9
62.5°	11.0
65°	4.7
67.5°	1.6
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)