

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P774450

Luminaire Tested: LD6D95BD010-EU6DR4570959035-6LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P774450
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D95BD010-EU6DR4570959035-6LBS1H
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 12180.8 lumens
Efficiency: N/A
Efficacy: 122.8 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 99.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P774450

CATALOG NUMBER: LD6D95BD010-EU6DR4570959035-6LBS1H

Luminous Intensity Polar Plot

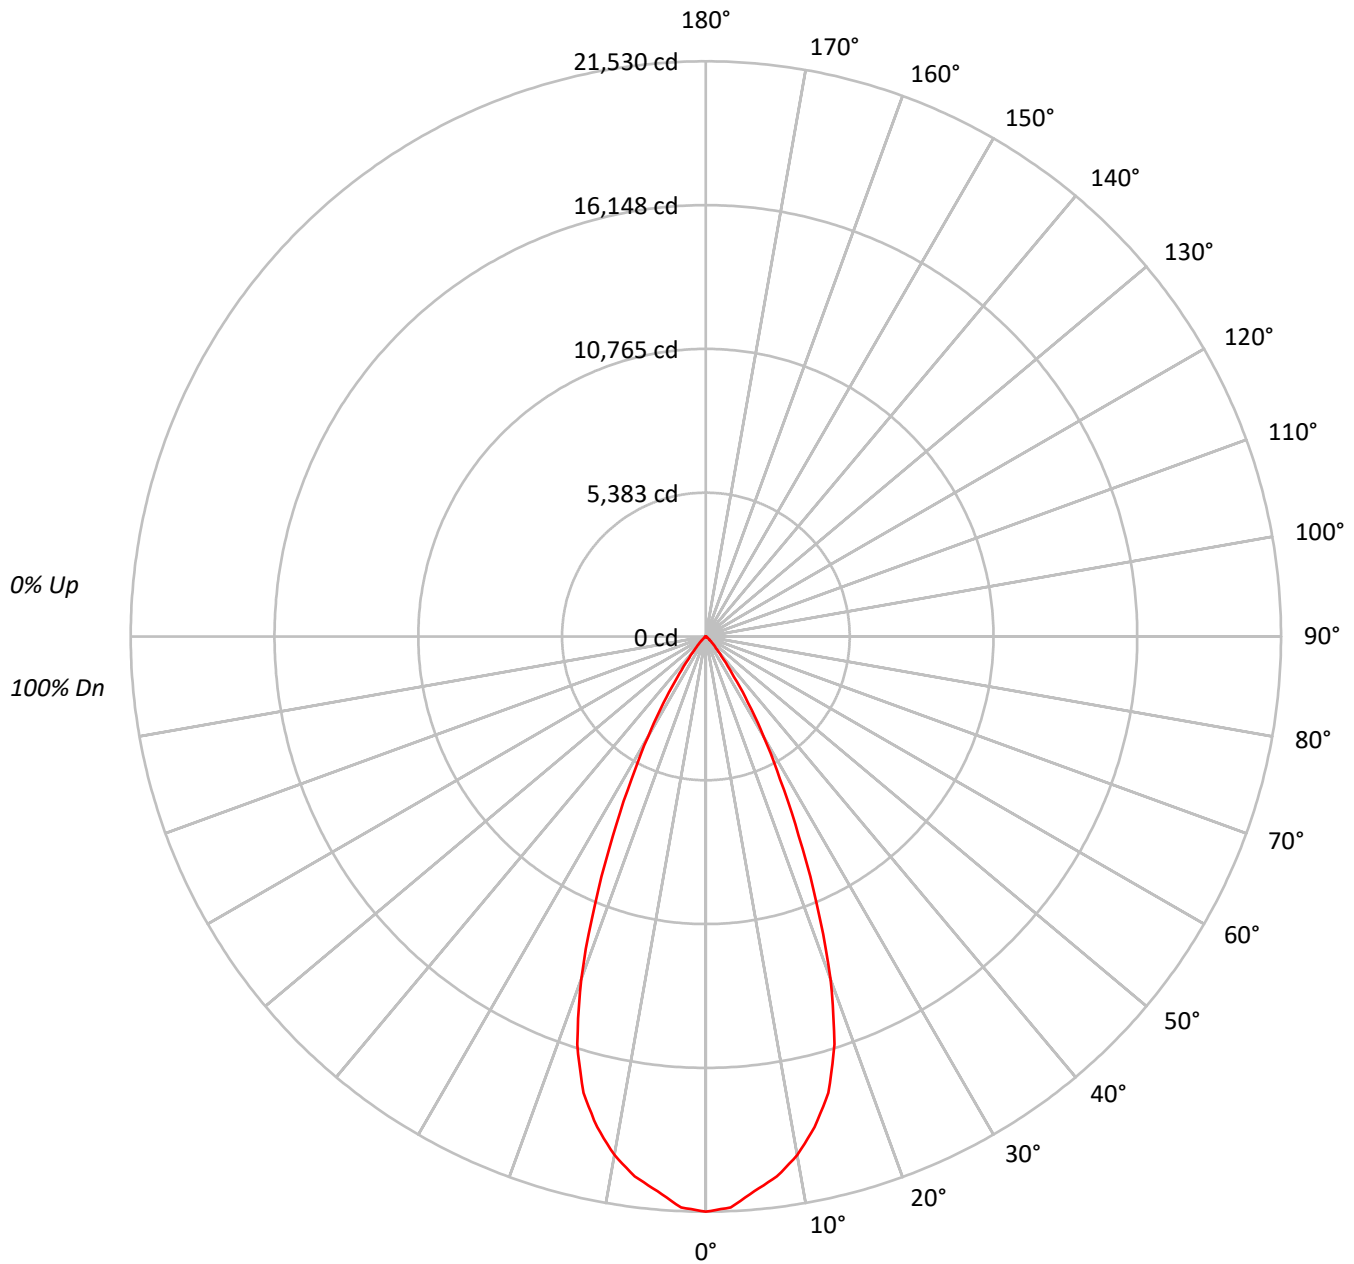

TEST NUMBER: P774450

CATALOG NUMBER: LD6D95BD010-EU6DR4570959035-6LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		98
2	109	105	102	99	107	103	100	98	100	98	95		97	95	93		95
3	105	99	95	91	103	98	94	91	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	91	87	84		89	86	83		87
5	96	89	84	80	95	88	83	80	86	82	79		85	81	79		83
6	92	85	80	76	91	84	79	76	83	78	75		81	77	75		80
7	89	81	75	72	87	80	75	72	79	74	71		78	74	71		77
8	85	77	72	68	84	76	71	68	75	71	68		74	70	67		73
9	82	73	68	65	81	73	68	65	72	68	65		71	67	64		71
10	79	70	65	62	78	70	65	62	69	65	62		68	64	61		68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2352362
5°	2285385
10°	2186496
15°	2001107
20°	1587566
25°	991138
30°	546288
35°	245291
40°	96617
45°	45536
50°	21587
55°	11296
60°	5550
65°	1319
70°	543
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 45536 cd/sqm



TEST NUMBER: P774450

CATALOG NUMBER: LD6D95BD010-EU6DR4570959035-6LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1957.9	16.1
10°-20°	4818.5	39.6
20°-30°	3815.8	31.3
30°-40°	1270.7	10.4
40°-50°	252.2	2.1
50°-60°	57.3	0.5
60°-70°	8.2	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	10592.2	87.0
0°-40°	11862.8	97.4
0°-60°	12172.3	99.9
0°-90°	12180.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	12180.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	21530	
5°	20837	###
15°	17691	4819
25°	8221	3816
35°	1839	1271
45°	295	252
55°	59	57
65°	5	8
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P774450

CATALOG NUMBER: LD6D95BD010-EU6DR4570959035-6LBS1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	21529.8
2.5°	21389.3
5°	20837.2
7.5°	20381.7
10°	19707.7
12.5°	18810.2
15°	17690.9
17.5°	16007.7
20°	13653.8
22.5°	10849.6
25°	8221.4
27.5°	6020.0
30°	4330.0
32.5°	2944.8
35°	1839.0
37.5°	1090.5
40°	677.4
42.5°	445.4
45°	294.7
47.5°	189.7
50°	127.0
52.5°	84.7
55°	59.3
57.5°	38.9
60°	25.4
62.5°	13.5
65°	5.1
67.5°	1.7
70°	1.7
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)