

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P774757

Luminaire Tested: LD6D95BD010-EU6DR6570959035-6LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P774757
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D95BD010-EU6DR6570959035-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7374.5 lumens
Efficiency: N/A
Efficacy: 74.3 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 99.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P774757

CATALOG NUMBER: LD6D95BD010-EU6DR6570959035-6LBDP1B

Luminous Intensity Polar Plot

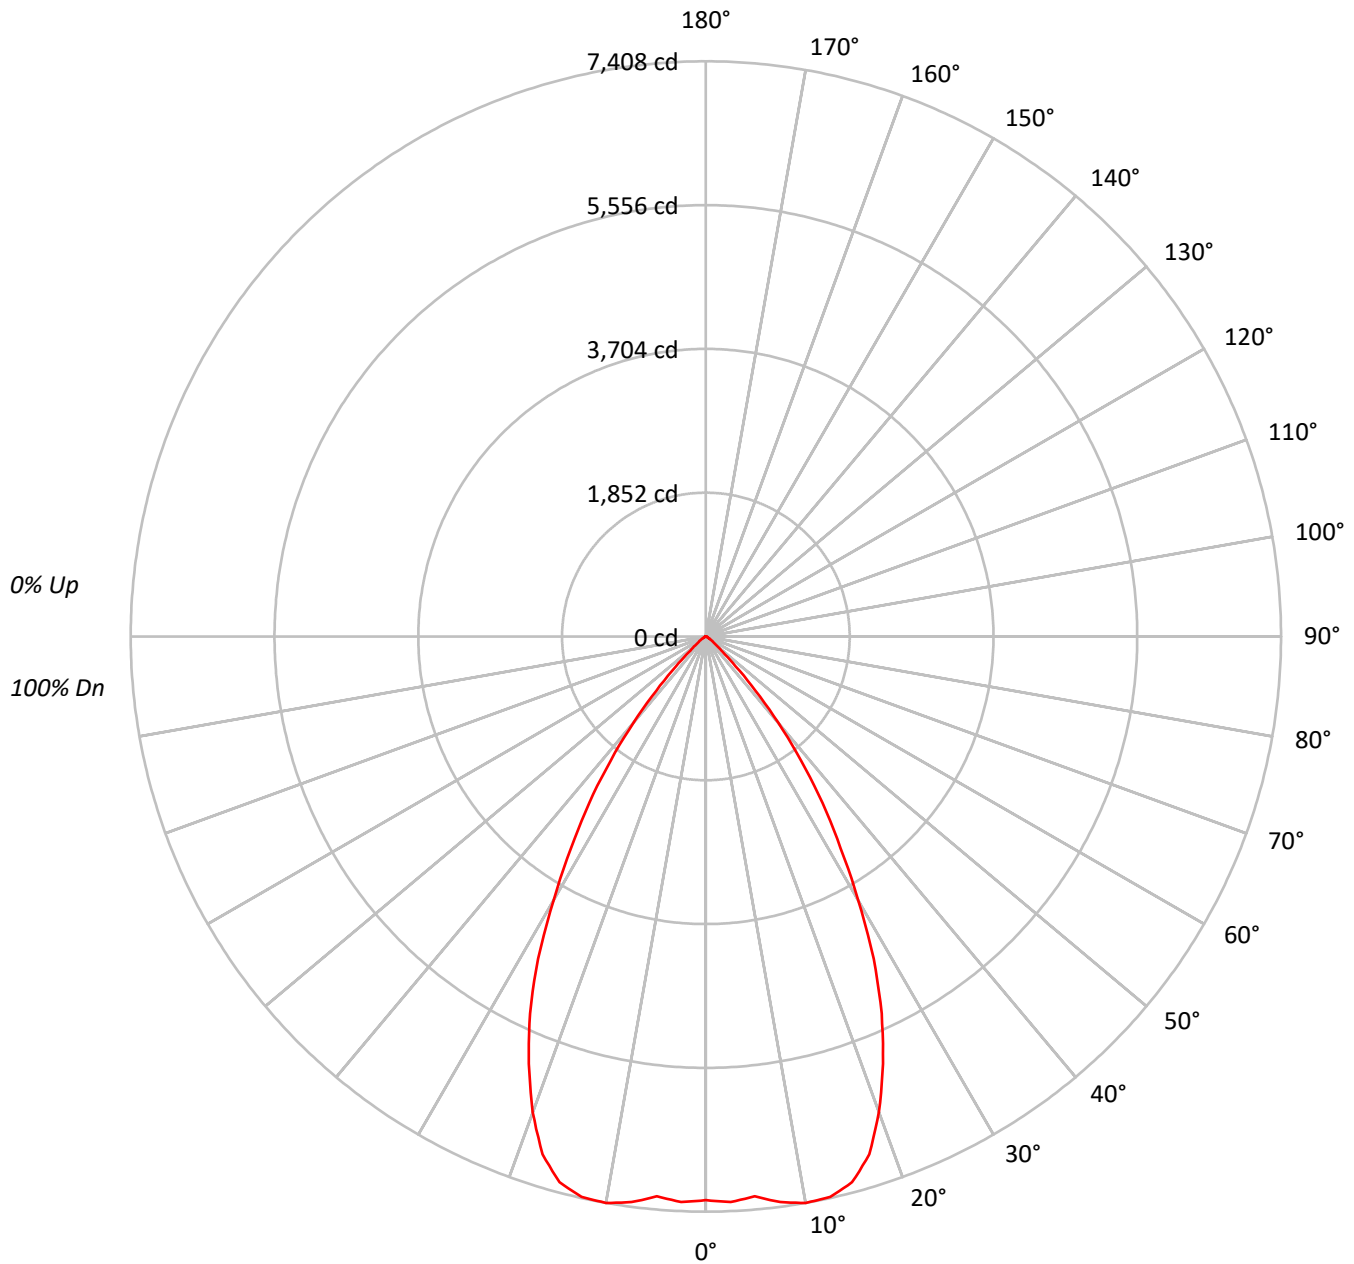



TEST NUMBER: P774757

CATALOG NUMBER: LD6D95BD010-EU6DR6570959035-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	111	108	106		111	108	106	104		104	103	101		101	99	98		97	96	95
2	108	103	99	95		106	101	97	94		98	95	92		95	92	90		92	90	88
3	102	96	91	87		100	94	90	86		92	88	85		89	86	83		87	84	82
4	97	89	84	79		95	88	83	79		86	82	78		84	80	77		82	79	76
5	92	83	78	73		90	83	77	73		81	76	72		79	75	72		77	74	71
6	87	78	72	68		86	77	72	68		76	71	67		74	70	67		73	69	66
7	83	73	67	63		81	73	67	63		71	66	62		70	66	62		69	65	62
8	79	69	63	59		77	68	63	59		67	62	58		66	62	58		65	61	58
9	75	65	59	55		74	65	59	55		64	58	55		63	58	55		62	58	54
10	71	61	56	52		70	61	55	52		60	55	51		59	55	51		59	54	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	793310
5°	793960
10°	821912
15°	823274
20°	757960
25°	645818
30°	494397
35°	349289
40°	206171
45°	83702
50°	30341
55°	16896
60°	9702
65°	5326
70°	5590
75°	4348
80°	4530
85°	3886

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 83702 cd/sqm



TEST NUMBER: P774757

CATALOG NUMBER: LD6D95BD010-EU6DR6570959035-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	699.1	9.5
10°-20°	2016.7	27.3
20°-30°	2419.7	32.8
30°-40°	1626.1	22.1
40°-50°	486.8	6.6
50°-60°	85.9	1.2
60°-70°	24.4	0.3
70°-80°	12.0	0.2
80°-90°	3.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5135.5	69.6
0°-40°	6761.6	91.7
0°-60°	7334.3	99.5
0°-90°	7374.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7374.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7261	
5°	7239	699
15°	7278	2017
25°	5357	2420
35°	2619	1626
45°	542	487
55°	89	86
65°	21	24
75°	10	12
85°	3	4
90°	0	



TEST NUMBER: P774757

CATALOG NUMBER: LD6D95BD010-EU6DR6570959035-6LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	7260.7
2.5°	7291.6
5°	7239.0
7.5°	7348.4
10°	7408.2
12.5°	7393.8
15°	7278.2
17.5°	6995.5
20°	6518.8
22.5°	5957.5
25°	5357.0
27.5°	4679.2
30°	3918.7
32.5°	3229.5
35°	2618.7
37.5°	2015.1
40°	1445.5
42.5°	944.1
45°	541.7
47.5°	286.8
50°	178.5
52.5°	123.8
55°	88.7
57.5°	64.0
60°	44.4
62.5°	28.9
65°	20.6
67.5°	18.6
70°	17.5
72.5°	13.4
75°	10.3
77.5°	9.3
80°	7.2
82.5°	5.2
85°	3.1
87.5°	2.1
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)